


This product is a connected accessory which **requires** you to buy and install the Arteor with Netatmo connected starter pack first.

### Pack contents

Connected switch



### Characteristics

In default operating mode (on/off), this switch works with the following bulbs:

+45°C +5°C			<b>LED</b> 		+	<b>(**)</b> +
100-240 VAC 50/60 Hz	1 x 2.5 mm <sup>2</sup>					
240 VAC	Max.	500 W	(*) 100 W	100 W	250 VA	250 VA
100 VAC	Max.	250 W	(*) 50 W	50 W	125 VA	125 VA

(\*) Or 10 lamps max. For a good light comfort, it is recommended to use bulbs of the same type and the same manufacturer.


(\*\*) Use only with transformers designed to work with electronic switches.  
Take account of transformer losses when calculating power.  
Transformers must be loaded at more than 60% of their power.

## Before you start: wiring precautions



**Do not use:** two connected switches to control the same lighting point.


If you plan to install two-way light switches, read the following precautions:



Connected  
switch

x 1


AND



x 1  
or several

Wireless controls for all control points  
(not included in this pack)


OR



Connected  
switch

x 1

AND




x 1  
or several

Mechanical 2-way switch  
(not included in this pack)

### Tip if replacing a two-way switch using a wireless control:

old flush-mounted switch replaced by the wireless control.

Use a **connector**  
to connect live wire  
and traveller wires  
1 and 2.

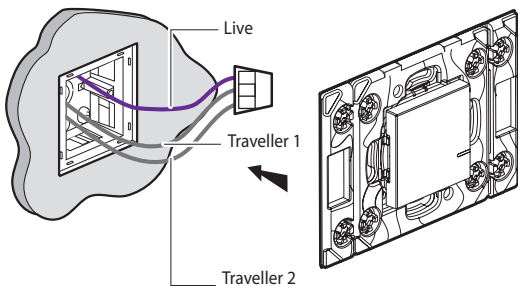

## ① Necessary safety precautions

1



Switch OFF the power at the main circuit breaker

OFF


2



Make sure that the power is OFF before continuing with the installation.


## ② Install the connected switch

1




Remove the existing switch

3




## ② Wire the connected switch

1 way



2 way

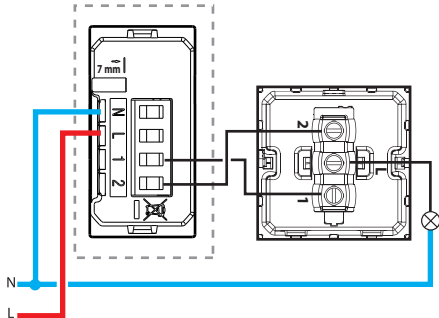

— N (neutral) = blue

— L (live) = any except blue and green/yellow

Frequency bands: 2.4 - 2.4835 GHz

Power level: < 100 mW

③ **To add a connected product to your connected installation, you should follow the instructions:**

- in the **user guide in your connected starter pack**
- in the **Legrand Home + Control application (Settings/Add a new product section)**
- or consult the user manual on **legrand.fr**



**[www.legrand.fr/reference/574211](http://www.legrand.fr/reference/574211)**

LEGRAND - Pro and Consumer Service - BP 30076  
87002 LIMOGES CEDEX FRANCE • [www.legrand.com](http://www.legrand.com)

 **Safety instructions**

This product should be installed in compliance with installation rules, preferably by a qualified electrician. Incorrect installation and/or incorrect use can lead to risk of electric shock or fire.

Before carrying out the installation, read the instructions and take account of the product's specific mounting location.

Do not open up, dismantle, alter or modify the device except where specifically required to do so by the instructions. All Legrand products must be opened and repaired exclusively by personnel trained and approved by Legrand. Any unauthorised opening or repair completely cancels all liabilities and the rights to replacement and guarantees. Use only Legrand brand accessories.

**SIMPLIFIED EU DECLARATION OF CONFORMITY**

The undersigned,

**Legrand**


declares that the radio-electric equipment referred to in these instructions complies with directive 2014/53/EU.

The full text of the EU declaration of conformity is available on the following website:

**[www.legrandoc.com](http://www.legrandoc.com)**

هذا المنتج هو جهاز متصل يتطلب منك أولاً شراء وتركيب علبة المنتجات الأساسية المتصلة ماركة .Arteor with Netatmo













محتويات العلبة



المفتاح المتصل

### مواصفات المنتج

في وضع التشغيل الافتراضي (التشغيل/إيقاف التشغيل)، يعمل هذا المفتاح مع المصابيح التالية:

			<b>مصباح LED</b> 			+45°م +5°م 
					2.5 x 1 ملم؟	100-240 فولت تيار متردد 50/60 هرتز
250 فولت أمبير	250 فولت أمبير	100 واط	100(*) واط	500 واط	الحد الأقصى	240 فولت تيار متردد
125 فولت أمبير	125 فولت أمبير	50 واط	50(*) واط	250 واط	الحد الأقصى	100 فولت تيار متردد

(\*) أو 10 مصابيح بحد أقصى. لتوفير أجواء إضاءة مريحة للعينين، يوصى باستخدام مصابيح من نفس النوع ونفس الشركة المصنعة.

(\*\*) لا تُستخدم سوى مع المحولات المصممة للعمل مع المفاتيح الإلكترونية.

يجب مراعاة الفقد الحاصل في قدرة المحول عند حساب القدرة.


يجب أن يكون الحمل الواقع على المحولات أكثر من القدرة المقررة لها بنسبة 60%.

## قبل بدء العمل: الاحتياطات الخاصة بتوصيلات الأسلاك

يحظر استخدام مفطاحان متصلان للتحكم في نفس موضع الإضاءة.




إذا كنت تنوي تركيب مفاتيح إضاءة ذات تحويلتين، فاقرأ الاحتياطات التالية:



المفتاح المتصل


1

و



1  
أو أكثر


مفتاح ميكانيكي ذو تحويلتين  
(ليست موجودة في هذه العلبة)



المفتاح المتصل

1


و



1  
أو أكثر

وحدات التحكم اللاسلكية لجميع مواضع التحكم  
(ليست موجودة في هذه العلبة)

نصيحة في حالة استبدال مفتاح ذي تحويلتين باستخدام وحدة تحكم لاسلكية:  
استبدال المفطاح القديم المركب داخل الجدار بوحدة التحكم اللاسلكية.



استخدم أداة وصل  
لتوصيل السلك الكهربائي  
والأسلاك الناقلة رقمي  
1 و2.

## ① احتياطات السلامة الضرورية

تأكد من فصل التيار الكهربائي قبل متابعة خطوات التثبيت.




افصل التيار الكهربائي من القاطع الرئيسي للدائرة الكهربائية




مفصول

## ② تركيب المفتاح المتصل



3




1


قم بإزالة المفتاح الموجود

## ② قم بتوصيل أسلاك المفتاح المتصل

تحويلتان

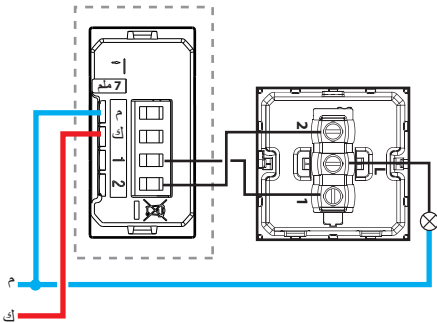

تحويلة واحدة



نطاقات التردد: 2.4 - 2.4835 جيجاهرتز  
مستوى القدرة: > 100 ميلي واط

م (محايد) = أزرق  
ك (خط كهربائي) = أي واحد فيما عدا الأزرق والأخضر/الأصفر

③ لإضافة منتج متصل إلى المنتجات المتصلة المركبة لديك، يجب اتباع الإرشادات:

- الواردة في دليل المستخدم المرفق مع علبة المنتجات الأساسية المتصلة
- الموجودة في التطبيق **Home + Control** الخاص بشركة **Legrand** (القسم الإعدادات/إضافة منتج جديد)
- أو راجع دليل المستخدم المتوفر على **legrand.fr**



[www.legrand.fr/reference/574211](http://www.legrand.fr/reference/574211)

LEGRAND - Pro and Consumer Service - BP 30076  
87002 LIMOGES CEDEX FRANCE • [www.legrand.com](http://www.legrand.com)

⚠ إرشادات الأمان:

يجب تركيب هذا المنتج طبقاً لقواعد التركيب ويفضل أن يقوم بالتركيب كهربائي مؤهل. فقد يؤدي التركيب الخاطئ و/أو الاستخدام الخاطئ إلى مخاطر التعرض لصدمة كهربائية أو نشوب حريق.  
اقرأ النشرة قبل التركيب، وأفرد مكاناً لتركيب المنتج خاصاً به.  
لا تفتح أو تفك أو تعطل أو تحوّر المنتج ما لم يُشر إلى ذلك بشكلٍ محدد في النشرة. فكل منتجات Legrand يجب فتحها وإصلاحها حصراً من قبل فنيين مدربين ومؤهلين لدى Legrand. وكل فتح أو إصلاح غير مسموح به يُبطل المسؤوليات وحقوق الاستبدال والضمانات. لا تُستخدم سوى إكسسوارات من ماركة Legrand حصراً.

## SIMPLIFIED EU DECLARATION OF CONFORMITY

The undersigned,

**Legrand**

declares that the radio-electric equipment referred to in these instructions  
complies with directive 2014/53/EU.

The full text of the EU declaration of conformity  
is available on the following website:

[www.legrandoc.com](http://www.legrandoc.com)