



This product is a connected accessory which **requires** you to buy and install the Arteor with Netatmo connected starter pack first.

Pack contents



Connected switch
(with dimmer option)+ bleeder

0 401 49 Bleeder 		100 - 240 V~
		50/60 Hz
		0.4 W
		- 5° C → + 55° C

Characteristics

In default operating mode (on/off), this switch works with the following bulbs:

 + 45° C + 5° C			Dimmable LED 			
100-240 VAC 50/60 Hz	1 x 2.5 mm ²					
240 VAC	Max.	300 W	(*)60 W	60 W	300 VA	300 VA
	Min.	7 W	5 W	9 W	10 VA	35 VA
100 VAC	Max.	150 W	(**)30 W	30 W	150 VA	150 VA
	Min.	7 W	5 W	9 W	10 VA	35 VA

(*) Or 10 lamps max. For comfortable lighting, we recommend using bulbs of the same type and brand.

(**) Use only with transformers designed to function with electronic switches.

Take account of transformer losses when calculating power.

Transformers must be loaded at more than 60% of their power.


With the dimmer option operating mode (which can be activated with the App), this switch only works with variable intensity bulbs (which can be identified by the logo on the packaging).



Before you start: wiring precautions

If you plan to install two-way light switches, read the following precautions:

To control a light **with two or more switches**, only use the products:

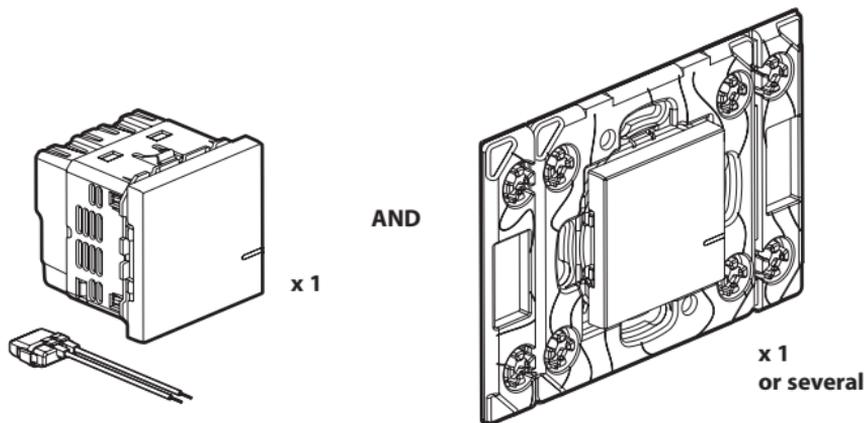

Connected switch

Wireless controls for all control points
(not included in this pack)




Do not use: two connected switches to control the same lighting point.

Tip if replacing a two-way switch:

old flush-mounted switch replaced by the wireless control.

Use a **connector** to connect live wire and traveller wires 1 and 2.

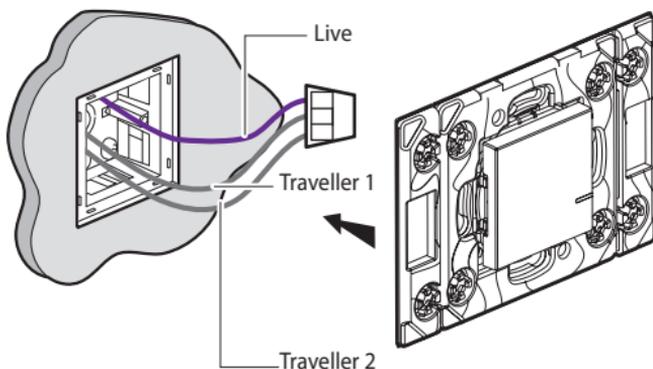

① Necessary safety precautions

1



OFF

Switch OFF the power at the main circuit breaker

2




Make sure that the power is OFF before continuing with the installation.


② Install the connected switch

1

Remove the existing switch




3



② Wire the connected switch

To ensure that your connected switch (with dimmer option) works correctly, you **must** wire **the bleeder** provided as close to the load as possible and put **a bulb** in before turning the power on.

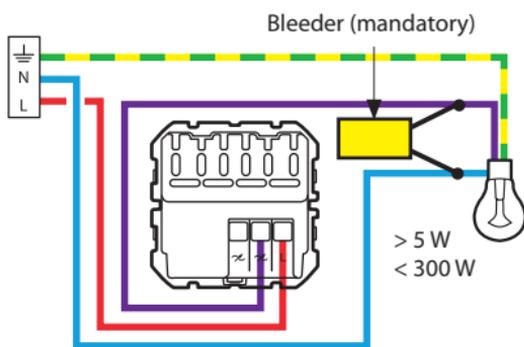

— N (neutral) = blue

— L (live) = any except blue and green/yellow

— \perp (earth) = green/yellow

Frequency bands: 2.4 - 2.4835 GHz

Power level: < 100 mW



The connected switch (with dimmer option) works with standard bulbs or dimmable bulbs including LEDs over 5 W.



Using dimmable LEDs is **strongly recommended** for optimal installation results.

If you have wired your bleeder but you are using non-dimmable LED bulbs, it is possible that your bulbs will not go out fully or will flicker. If this is the case, refer to the table of recommended bulbs on the legrand.com website.

③ **To add a connected product to your connected installation, you should follow the instructions:**

- in the **user guide in your connected starter pack**
- in the **Legrand Home + Control application (Settings/Add a new product section)**
- or consult the user manual on **legrand.fr**



www.legrand.fr/reference/574212

LEGRAND - Pro and Consumer Service - BP 30076
87002 LIMOGES CEDEX FRANCE • www.legrand.com

⚠ Safety instructions

This product should be installed in compliance with installation rules, preferably by a qualified electrician. Incorrect installation and/or incorrect use can lead to risk of electric shock or fire.

Before carrying out the installation, read the instructions and take account of the product's specific mounting location.

Do not open up, dismantle, alter or modify the device except where specifically required to do so by the instructions. All Legrand products must be opened and repaired exclusively by personnel trained and approved by Legrand. Any unauthorised opening or repair completely cancels all liabilities and the rights to replacement and guarantees. Use only Legrand brand accessories.

SIMPLIFIED EU DECLARATION OF CONFORMITY

The undersigned,

Legrand

declares that the radio-electric equipment referred to in these instructions complies with directive 2014/53/EU.


The full text of the EU declaration of conformity is available on the following website:

www.legrandoc.com

هذا المنتج هو جهاز متصل يتطلب منك أولاً شراء وتركيب علبة المنتجات الأساسية المتصلة ماركة .Arteor with Netatmo

محتويات العلبة



100 - 240 فولت تقريباً		0 401 49 صمام التفريغ
50/60 هرتز		
0.4 واط		
- 5° م ← + 5° م		



المفتاح المتصل
(مع مفتاح تغيير شدة الإضاءة الاختياري) + صمام تفريغ

مواصفات المنتج

في وضع التشغيل الافتراضي (التشغيل/إيقاف التشغيل)، يعمل هذا المفتاح مع المصابيح التالية:

						
300 فولت أمبير	300 فولت أمبير	60 واط	60(*) واط	300 واط	الحد الأقصى	45° م + 5° م +
35 فولت أمبير	10 فولت أمبير	9 واط	5 واط	7 واط	الحد الأدنى	240-100 فولت تيار متردد 50/60 هرتز
150 فولت أمبير	150 فولت أمبير	30 واط	30(*) واط	150 واط	الحد الأقصى	2.5 x 1 ملم ²
35 فولت أمبير	10 فولت أمبير	9 واط	5 واط	7 واط	الحد الأدنى	240 فولت تيار متردد

(*) أو 10 مصابيح بحد أقصى. لتوفير أجواء إضاءة مريحة للعينين، نوصي باستخدام مصابيح من نفس النوع والماركة.

(**) لا تُستخدم سوى مع المحولات المصممة للعمل مع المفاتيح الإلكترونية.

يجب مراعاة الفقد الحاصل في قدرة المحول عند حساب القدرة.

يجب أن يكون الحمل الواقع على المحولات أكثر من القدرة المقررة لها بنسبة 60%.


في وضع تشغيل مفتاح تغيير شدة الإضاءة الاختياري (الذي يمكن تنشيطه باستخدام التطبيق)، لا يعمل هذا المفتاح سوى مع المصابيح ذات شدة الإضاءة المتفاوتة (يمكن تمييزها من الشعار الموجود على العلبة).



قبل بدء العمل: الاحتياطات الخاصة بتوصيلات الأسلاك

إذا كنت تتوي تركيب مفاتيح إضاءة ذات تحويلتين، فقرأ الاحتياطات التالية:


للتحكم في مصباح إضاءة باستخدام مفاتيح أو أكثر، لا تستخدم سوى المنتجات التالية:

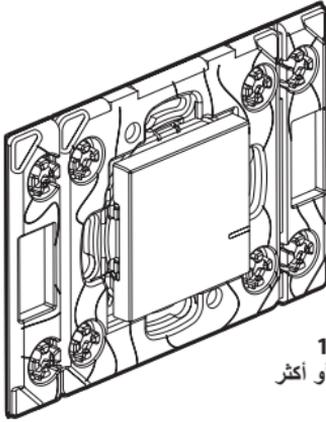

1
أو أكثر

وحدات التحكم اللاسلكية لجميع مواضع التحكم
(ليست موجودة في هذه العلبة)

و



1


المفتاح المتصل

يحظر استخدام: مفاتيح متصلان للتحكم في نفس موضع الإضاءة.



نصيحة في حالة استبدال مفتاح ذي تحويلتين:

استبدال المفتاح القديم المركب داخل الجدار بوحدة التحكم اللاسلكية.

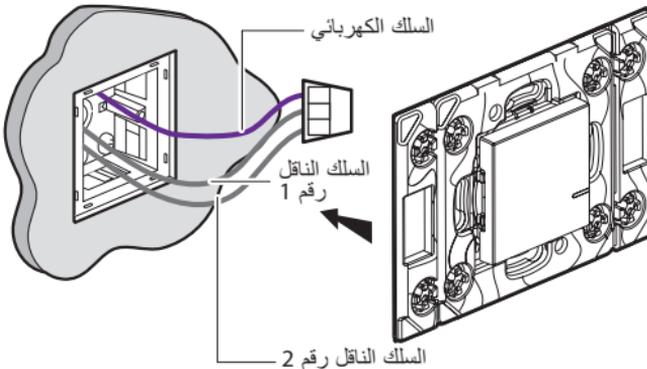

استخدم أداة وصل
لتوصيل السلك الكهربائي
والأسلاك الناقل
رقمي 1 و2.

③ لإضافة منتج متصل إلى المنتجات المتصلة المركبة لديك، يجب اتباع الإرشادات:

- الواردة في دليل المستخدم المرفق مع علبة المنتجات الأساسية المتصلة
- الموجودة في التطبيق **Home + Control** الخاص بشركة **Legrand** (القسم الإعدادات/إضافة منتج جديد)
- أو راجع دليل المستخدم المتوفر على **legrand.fr**



www.legrand.fr/reference/574212

LEGRAND - Pro and Consumer Service - BP 30076
87002 LIMOGES CEDEX FRANCE • www.legrand.com

⚠ إرشادات الأمان:

يجب تركيب هذا المنتج طبقاً لقواعد التركيب ويفضل أن يقوم بالتركيب كهربائي مؤهل. فقد يؤدي التركيب الخاطئ و/أو الاستخدام الخاطئ إلى مخاطر التعرض لصدمة كهربائية أو نشوب حريق.
اقرأ النشرة قبل التركيب، وأفرد مكاناً لتركيب المنتج خاصاً به.
لا تفتح أو تفك أو تعطل أو تحوّر المنتج ما لم يُشر إلى ذلك بشكلٍ محدد في النشرة. فكل منتجات Legrand يجب فتحها وإصلاحها حصراً من قبل فنيين مدربين ومؤهلين لدى Legrand. وكل فتح أو إصلاح غير مسموح به يُبطل المسؤوليات وحقوق الاستبدال والضمانات. لا تُستخدم سوى إكسسوارات من ماركة Legrand حصراً.

SIMPLIFIED EU DECLARATION OF CONFORMITY

The undersigned,

Legrand

declares that the radio-electric equipment referred to in these instructions
complies with directive 2014/53/EU.

The full text of the EU declaration of conformity
is available on the following website:

www.legrandoc.com