

## 6 Important Notes Before First Time Use

1. Do not use rechargeable batteries, do not mix old and new batteries or different types. Alkaline batteries are recommended in the receiver for a longer operating life. 2. The operation and range of your wireless door bell depends on location, temperature and battery condition. 3. Do not expose the unit to rain or immerse either unit in water. 4. Avoid locations where the bell press transmitter is exposed to direct summer sunlight. 5. Do not leave exhausted batteries in door bell receiver or bell press transmitter. 6. Clean only with a damp cloth and mild detergent. Do not use solvents.

## 7 Product Notes

1. Suitable for indoor installation only. 2. Handle the door bell gently and carefully. Dropping it can damage the circuit boards and can cause the door bell to work improperly. 3. Keep the door bell away from dust and dirt, which can cause premature wear of parts. 4. Use only fresh batteries of the recommended size and type. Always remove old or weak batteries. They can leak chemicals that can destroy electronic circuits. 5. Modifying or tampering with the door bell's internal components can cause a malfunction and might invalidate its warranty. 6. This product contains no serviceable parts and no attempt should be made to repair this product. If the product is faulty it should be discarded. 7. The material in this product may vary in colour from batch to batch. Colour matching from one batch to another cannot be guaranteed. 8. Legrand reserves the right to modify the specifications of this product at any time another cannot be guaranteed. 9. This product utilises intellectual property in the form of registered designs, trademarks, and/or patents. Such intellectual property remains the property of Legrand in all cases.

## 10 Warning

1. Ensure the device's battery compartment is secured with a screw provided. 2. Do not use if the battery compartment is not secure. 3. Dispose of used button/coin batteries immediately by placing sticky tape around both sides of the battery and dispose of it immediately in an outside bin, out of reach of children, or recycle safely.



### WARNING

#### THIS PRODUCT CONTAINS A COIN BATTERY

If swallowed, a lithium coin battery can cause severe or fatal injuries within 2 hours. Keep batteries out of reach of children. If you think batteries may have been swallowed or placed inside any part of the body, seek medical attention immediately.

### Warranty

Legrand Australia warrants this product for a period of 3 years from the date of purchase.

These goods come with guarantees that cannot be excluded under the Australian and New Zealand Consumer Laws. You are entitled to a replacement or a refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

See the Warranty card enclosed with this product for further details.

### Customer Service

For all Customer Service and Technical Support please call Monday to Friday during business hours.

Legrand Australia  
1300 369 777  
www.hpm.co.au

Legrand New Zealand  
0800 476 009  
www.hpm.co.nz

ABN: 31 000 102 661



ari.org.au

02/2022  
LE11033AC



A brand of **legrand**


# Wireless Door Bell - Comfort

Battery Operated

Cat. No. **D643/WEC, D643/BPWE**

Instruction Manual

Please read all instructions carefully before installation and use.

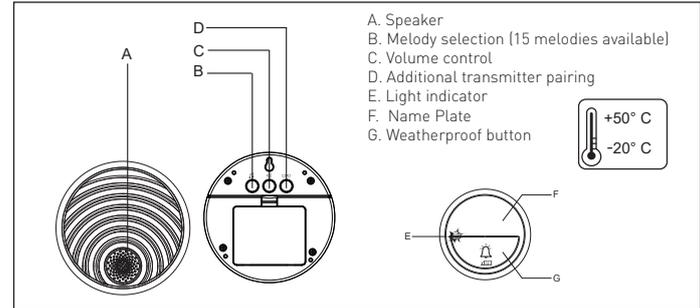

- A. Speaker
- B. Melody selection (15 melodies available)
- C. Volume control
- D. Additional transmitter pairing
- E. Light indicator
- F. Name Plate
- G. Weatherproof button

## 1 Specification

- Radio Operating Range: 100 m free field
- Receiver Sound Power: 75 dB @ 1m
- Frequency Band: 433.05-434.79 MHz
- RF Power Level: < 10 mW
- Degree of Protection: IP44 (Transmitter), IP20 (Receiver)
- Receiver Installation: Wall mounted/Free standing
- Transmitter Installation: Wall mounted/Adhesive/Free standing

### Box contents:

- 1 x Bell press
- 1 x Door bell receiver
- 3 x Wall plugs and 3 x Screws
- 2 x Wall plugs and 2 x Screws (D643/BPWE only)
- 2 x Double sided tape
- 1 x 3 V CR2032 Lithium battery (supplied)

### Battery requirement:

- Battery for transmitter: 1 x 3 V [CR2032] lithium battery included
  - Battery for receiver: 3 x 1.5 V AA batteries (not included)
- Do not use rechargeable batteries.

- Warranty Card
- Instruction Manual

## 2 Features

- Battery operated / Wireless operation
- Range 100m in free field
- 15 melodies
- Name tag insert
- Speaker
- Easy to install - no wires or cables
- No signal interference for neighbours
- Can be used as a door bell or panic switch


### 3 Before Installation

- Test the location of both units to ensure satisfactory operation before permanently fixing either unit in place.
- Do not mount the bell press transmitter on metal or near a metal door frame, security door or in close proximity to any metal outdoor furniture. The range of the unit may be substantially reduced.


### 4 Installation

#### A. DOOR BELL RECEIVER

##### 1. Wall mount with screws




##### 2. Free standing




#### B. DOOR BELL TRANSMITTER

##### 1. Wall mount with screws

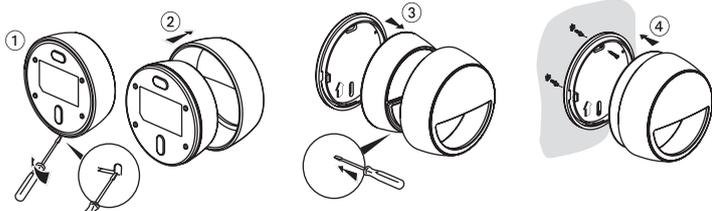


##### 2. With adhesive




- If using first time, pull out the plastic film to activate the battery.

##### 3. Free standing




### 5 Operating Instructions

#### BATTERY REPLACEMENT

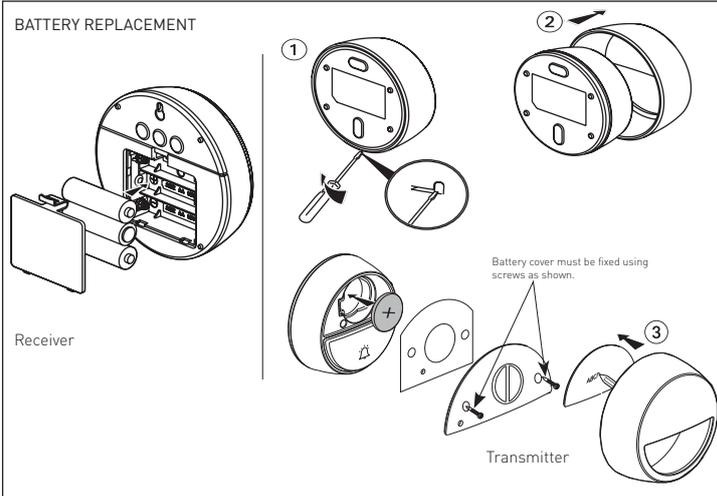

#### ADDITIONAL TRANSMITTER PAIRING

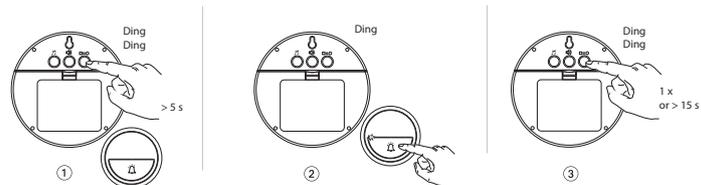

#### TRANSMITTER UNPAIRING

1. Remove batteries of receiver.
2. Hold Receiver pairing button and load in batteries at the same time, and keep holding pairing button till you hear ding dong. All transmitter pairing are cleared.