

Datasheet

Plazza LED Floodlight

CAT NO. 682430, 682431, 682432, 682433



682430





682431



682432



682433

Cat No	682430	682431	682432	682433
Description	PLAZZA LED 6100 ASYM	PLAZZA LED 12000 ASYM	PLAZZA LED 18100 ASYM	PLAZZA LED 30000 ASYM
Weight	5Kg	6Kg	7Kg	10Kg
Nominal luminaire luminous flux (lm)	6,100	12,000	18,100	30,000
Colour temperature (K)	4,000			
Chromaticity tolerance	ANSI ANSLG C78.377: 3985K±275 MacAdam Ellipse: 3SDCM			
Nominal circuit power (W)	60	115	175	290
Nominal luminaire efficacy (lm/W)	102	104	103	103
Power factor	>0.95			
Supply voltage	240V 50Hz			
Driver type	Fixed output/Non-Dimmable			
Operating temperature	0°C to 40°C			
Body construction	Aluminium – powder coated black			
Lens	Asymmetric lens			
Power cable	1.5m length flex			
IP	IP66			
Impact rating	IK08			
Compliance	AS/NZS 60598  			


Plazza LED Floodlight

CAT NO. 682430, 682431, 682432, 682433



- Up to 30,000 lumen output
- 4000K colour temperature
- L70 @ 50,000 hours
- CRI > 80
- Asymmetric lens
- Mains
- IP66
- IK08


Polar Curve

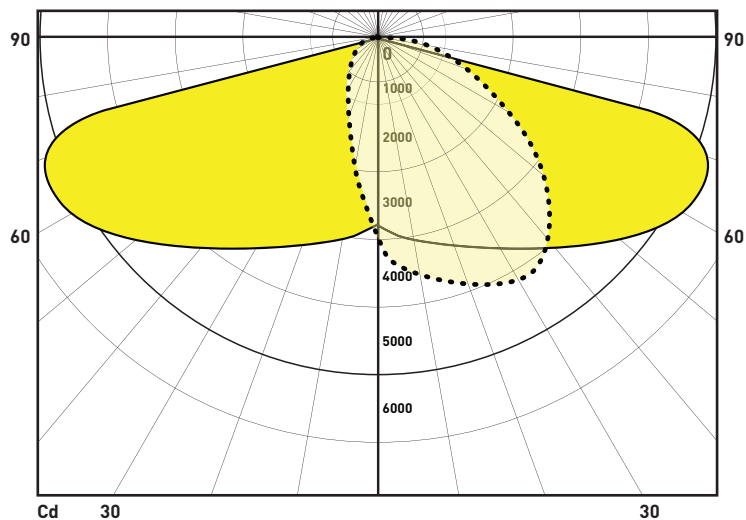

682432 - PLAZZA LED FLOODLIGHT

— C0 C90

DIMENSIONS

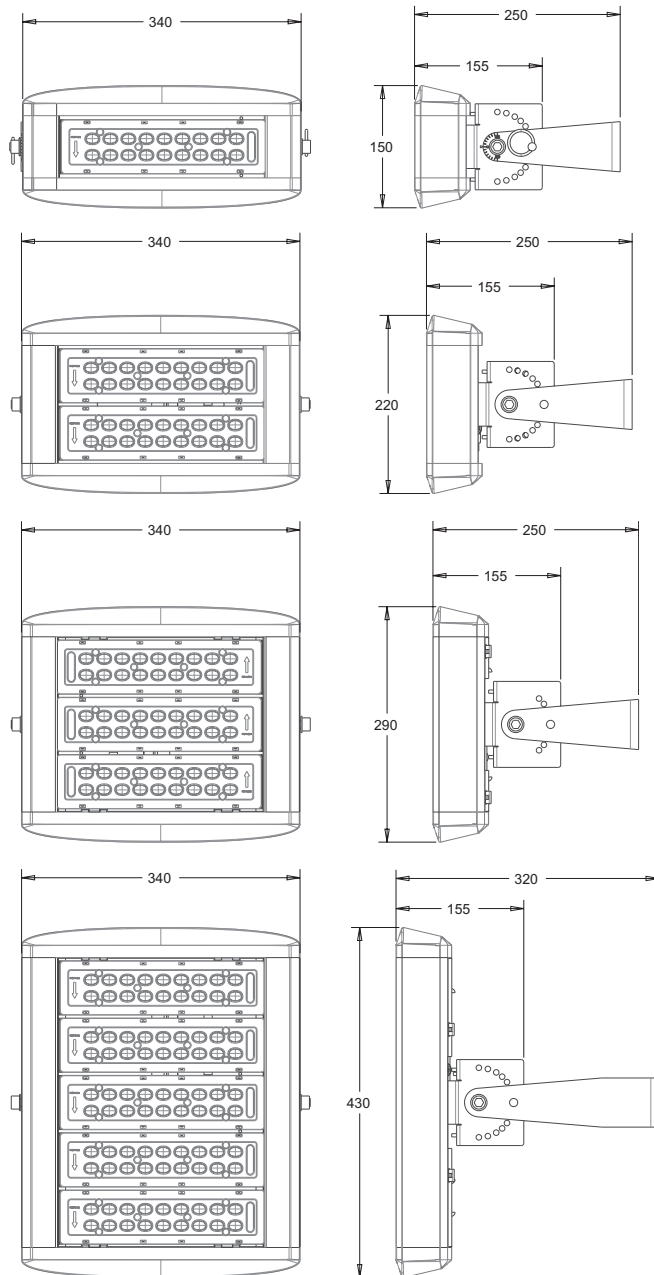

Legrand - AUS
1300 369 777
www.legrand.com.au
ABN 31 000 102 661

Legrand - NZ
0800 476 009
www.legrand.co.nz

Refer to your group buying office, Legrand Sales Representative or Legrand Sales Office for pricing.

LEG1803

08_2018