

Audio/Video Web Server

F454

Description

Audio/Video Web Server for local and remote control of MY HOME applications using dedicated web pages.

The Web Server can also be used as a gateway for the management of the system using devices like PCs and Smartphones, and for virtual configuration, using a dedicated software.

Technical data


Power supply from SCS BUS: 18 – 27 Vdc
Absorption: 125 mA max (with active video interface)
Operating temperature: 5 – 35 °C

Dimensional data

6 DIN modules

Configuration

The audio/video web server is configured using the TIF454 software thanks to a LAN connection (with cross-over cable if the connection between PC and F454 is direct, without using a HUB/SWITCH) or using a standard USB and mini USB cable.

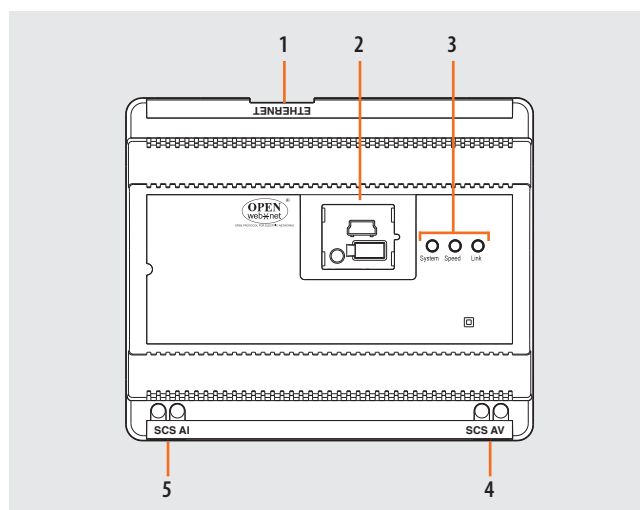

Legend

1. RJ 45 for 10/100Mbit Ethernet LAN
2. Under the door are:
 - USB ports for PC configuration and Firmware update
 - RESET pushbutton
 - Serial connector RS232
3. User interface:
 - Speed: Connection speed; ON = 100 Mbit;
OFF = 10 Mbit
 - Link: ON it indicates the presence of the Ethernet network
 - System: when the power supply is connected, it comes on, goes off, and then comes on again, to indicate that the web server is working
4. 2-wire BUS for video door entry system connection
5. 2-wire BUS for burglar alarm system