

TIME SWITCHES AND MODULAR CONTROL DEVICES



HIGH QUALITY AND
EASILY PROGRAMMABLE
FOR IMPROVED PRODUCTIVITY
AND ENERGY SAVINGS



CATALOGUE
PAGES
→ INSIDE

GLOBAL SPECIALIST
IN ELECTRICAL AND DIGITAL BUILDING INFRASTRUCTURES

 **legrand**[®]

ALPHAREX³

THE FULL PRODUCT RANGE

THE ALPHAREX³ FAMILY OF PROGRAMMABLE DIGITAL TIME SWITCHES SAVES ENERGY, REDUCES ELECTRICAL COSTS AND THE FAST SET-UP MAKES YOUR LIFE EASIER.

One unique software and data key for all digital time switches for quick and easy programming and transferring programs to other time switches and/or for creating backup copies and kept in distribution boards for future reference.

Identical function buttons and display for all time switches. Once you have mastered one, you can operate any model, regardless of the time switch or application.

Simple programming precise to the second with high clock precision ± 0.2 sec per day.



Manufactured by
Legrand in Germany



ALPHAREX³ PROGRAMMABLE WEEKLY TIME SWITCHES

- 1 channel with 56 programs
- 2 channels with 28 programs per channel



ALPHAREX³ ASTRO ASTRONOMICAL TIME SWITCHES

- Switches according to astronomical time or operates as a programmable weekly time switch
- 1 output with 56 programs
- 2 output with 28 programs per channel
(No need to install a photoelectric cell)



ALPHAREX³ DY YEARLY TIME SWITCH

- Yearly and weekly time switch with astronomical function
- 2 output with 28 programs per channel
- Possible weekly, yearly and special programs

ADVANTAGES OF WORKING WITH THE ALPHAREX³ SERIES

- Common button design on all time switches for easy handling
- High resolution display with backlight
- Standardised text-guided programming
- All time switches are equipped with a security PIN code lock and 1h test
- Clock precision: ± 0.2 sec per day
- EEPROM memory for back up switching programs
- Automatic switching for daylight saving time
- With 5 years battery reserve
- Cycle and holiday programming
- Removable module for easy programming

REMOVABLE MODULE

CLEAR OVERVIEW PROGRAMS

CLEAR OPERATION MODE

DATA KEY SLOT




ONE SINGLE DATA KEY FOR ALL PROGRAMMABLE TIME SWITCHES

EASY TO HANDLE FUNCTION BUTTONS

CLEAR DATE AND TIME DISPLAY

CLEAR SWITCHING STATUS

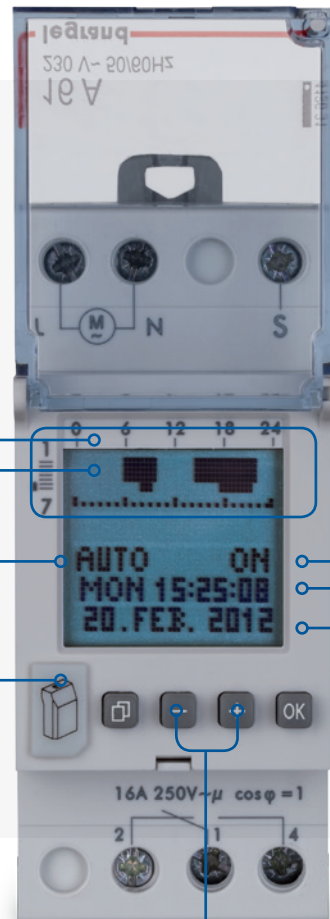

REMOVABLE MODULE FOR EASY PROGRAMMING AND CHANGING BATTERY

The module can be removed without uninstalling the AlphaRex3 from the distribution board. (Disconnect all power from the device).

ZERO-CROSSING

Zero-crossing switching protects contacts, increases product life time and reduces costs and resource consumption.

*Legrand strongly recommend the installation of modular contactors with all time switches.

MICROREX

ANALOGUE TIME SWITCH

THE TRUSTED MICROREX ANALOGUE TIME SWITCHES OFFER EASY OPERATION AND PROGRAMMING BY SETTING THE ANALOGUE SWITCHING DIAL FOR BASIC AND SIMPLE APPLICATIONS.



Manufactured by
Legrand in Germany



MICROREX DAILY/WEEKLY TIMESWITCH 1 MODULE

Daily time switch:

With synchronous or quartz motor

Weekly time switch:

With synchronous or quartz motor

- 15 min switching dial segment (daily)
- ± 5 min accuracy (daily)
- 2h min switching dial segment (weekly)
- ± 30 min accuracy (weekly)
- With and without 100h battery reserve



MICROREX DAILY/WEEKLY TIMESWITCH 3 MODULE

Daily time switch:

With synchronous or quartz motor


Weekly time switch:

With synchronous or quartz motor

- 15 min switching dial segment (daily)
- ± 5 min accuracy (daily)
- 2h min switching dial segment (weekly)
- ± 30 min accuracy (weekly)
- With and without 100h battery reserve

ADVANTAGES OF WORKING WITH THE MICROREX SERIES

- Easy installation and set up
- Precision clockwork:
±0.2 sec per day clock precision
- Changeover contact as switch output (horizontal)
- Normally open contact (vertical)
- With and without removable 100h battery reserve

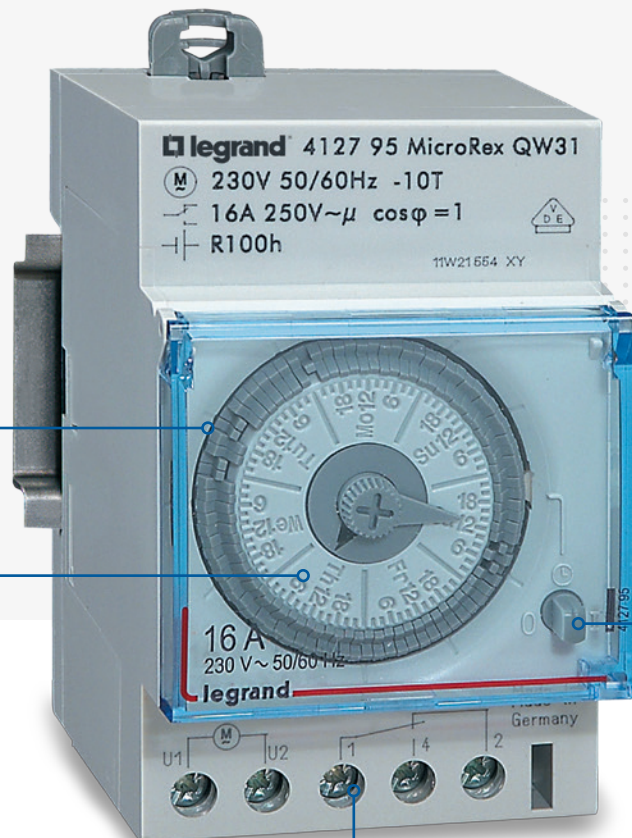

SEALABLE COVER

CAPTIVE SWITCHING SEGMENTS

CHANGOVER CONTACT (HORIZONTAL), NORMALLY OPEN CONTACT (VERTICAL)

MANUAL SWITCHING: ON/AUTOMATIC/OFF

*Legrand strongly recommend the installation of modular contactors with all time switches.

AlphaRex³ digital time switches

Daily and weekly time switches



412631

AlphaRex³ digital time switches

Astronomical time switches



412657

Additional technical information pages 12 -14

Pack	Cat. Nos	AlphaRex ³
		<ul style="list-style-type: none"> • 2 modules • 5 years clock working reserve • Li cell type battery (LiMnO₂) CR2477 • Daily and weekly time switch • Quick and easy programming due to the option to select day blocks, day blocks can be individually set or selected from the blocks Mon–Sun, Mon–Fri or Sat–Sun • Switch times visible in weekly overview on display • With the following additional functions for added convenience: <ul style="list-style-type: none"> - Holiday program - Random function - Operating hours counter, counting range of up to 65,535h - 1h test - PIN code input lock • Expert mode for additional functions: <ul style="list-style-type: none"> - Cycle function, switch-on time can be set between 1s and 1h 59min 59s - Mains-synchronous operation can be set • Backlight
1	412631	AlphaRex³ D21, 1 channel <ul style="list-style-type: none"> - Power supply 230V, 50/60 Hz - 1 Output contact, 250V a.c. 16A~ cos φ = 1 - 56 programs
1	412641	AlphaRex³ D22, 2 channels <ul style="list-style-type: none"> - Power supply 230V, 50/60 Hz - 2 Output contact, 250V a.c. 16A~ cos φ = 1 - 56 programs (28 per channel)

Pack	Cat. Nos	AlphaRex ³ Astro
		<ul style="list-style-type: none"> • 2 modules • 5 years clock working reserve • Li cell type battery (LiMnO₂) CR2477 • Controlled directly by the distribution board, no separate light sensor required • For switching on/off lights and other electric devices according to the rising/setting of the sun • Function for creating switching programs in which the devices are switched according to astronomical time and/or fixed preset times • Daily astronomical calculation of the sunrise/sunset times based on the entered location or location coordinates • Offset for sunrise and sunset times can be adjusted up to ± 120 min. These time differentials are set separately for sunrise and sunset • Quick and easy programming due to the option to select day blocks; day blocks can be individually set or selected from the blocks Mon–Sun, Mon–Fri or Sat–Sun • Switch times visible in weekly overview on display • With the following additional functions for added convenience: <ul style="list-style-type: none"> - Holiday program - Random function - Operating hours counter, counting range of Xp to 65,535 h - Control input (1-channel time switch, cat. no.: 412654), switch-off delay can be set from 0s to 23h 59min 59s - 1h test - PIN code input lock • Expert mode for additional functions: <ul style="list-style-type: none"> - Cycle function, switch-on time can be set between 1s and 1h 59min 59s - Control input "extra" (1-channel time switch, cat. no.: 412654) - Mains-synchronous operation can be set • Backlight
1	412654	AlphaRex³ D21 Astro, 1 channel <ul style="list-style-type: none"> - Power supply 230V, 50/60 Hz - With control input - 1 Output contact, 250V a.c. 16A~ cos φ = 1 - 56 programs - Shortest switching step: 1s
1	412657	AlphaRex³ D22 Astro, 2 channels <ul style="list-style-type: none"> - Power supply 230V, 50/60 Hz - 2 Output contact, 250V a.c. 16A~ cos φ = 1 - 56 programs (28 per channel) - Shortest switching step: 1s

AlphaRex³ digital time switches

Yearly time switches



Technical information on pages 12 - 14

Pack	Cat. Nos	AlphaRex ³ DY
1	412630	<p>AlphaRex³ DY22, 2 channel</p> <ul style="list-style-type: none"> • 2 modules • 5 years clock working reserve • Li cell type battery (LiMnO₂) CR2477 • Yearly and weekly time switch with additional astronomical function for all channels • 28 switching programs per channel, comprising: <ul style="list-style-type: none"> - weekly programs - yearly programs - special programs (priority program) • With the following additional functions for added convenience: <ul style="list-style-type: none"> - Astronomical function (sunrise/sunset times) can be combined with time switch function. No need for external light sensor (photo cell) - Offset can be set to either ± 120 min or ± 12°00' - Random function - Operating hours counter, counting range of up to 65,535 h - 1 h test - PIN code input lock • Expert mode for additional functions: <ul style="list-style-type: none"> - Cycle function, switch-on time can be set between 1 s and 1 h 59 min 59 s - Channel-switching function (2-channel time switch) - Mains-synchronous operation can be set • Backlight <p>AlphaRex³ DY22, 2 channel</p> <ul style="list-style-type: none"> - Power supply 230V, 50/60 Hz - 2 Output contact, 250V a.c. 16A~ cos φ = 1 - 56 programs (28 per channel)

Pack	Cat. Nos	AlphaRex ³ DY64
1	04770	<ul style="list-style-type: none"> • 6 modules • 5 year Clock working reserve (04782) • Yearly and weekly time switch with additional astronomical function for all channels • 28 switching programs per channel, comprising: <ul style="list-style-type: none"> - weekly programs - yearly programs - special programs (priority program) • With the following additional functions for added convenience: <ul style="list-style-type: none"> - Astronomical function (sunrise/sunset times) can be combined with time switch function. No need for external light sensor (photo cell) - Random function - Operating hours counter, counting range of up to 65,535 h - 1 h test - PIN code input lock - Cycle function (channel 1) - Control input (channel 1) - Mains-synchronous operation can be set • Backlight <p>AlphaRex³ DY64, 4 channel</p> <ul style="list-style-type: none"> - Power supply 230V, 50/60 Hz - 4 Output contact 250V a.c. 4x16A~ cos φ = 1
1	412872	<p>Programming accessories</p> <p>Data key</p> <ul style="list-style-type: none"> - Import switching programs into the time switch, to do so select the "READ KEY" function on the time switch. - Transfer switching programs to the key using the "WRITE KEY" time switch function, this allows you to quickly and easily transfer programs to other time switches and/or to create backup copies
1	412873	<p>PC adapter for USB port</p> <ul style="list-style-type: none"> • Can be used to create, save and transfer program settings for multifunction and multi-program time switches, Cat. No. 04770, 412630/31/41/54/57 • Data is transferred to the program transfer key Cat. No. 4128 72, using the data loader connected to the USB port of the PC • Kit comprising software on CD-ROM, data loader and transfer key Windows[®] Vista, Windows[®] XP, Windows[®] Vista, Windows[®] 7, Windows[®] 8

Selection table

Type	Cat.No	Output	Daily program	Weekly program	Astronomical program	Yearly program	Special program	Holiday program	Random function	Operating hours counter	Relay function	Channel-switching function	Offset correction function	Pulse function	Cycle function	Control input	Synchronous operation can be set	1h test	PIN code	PC programming	Contrast adjustment	Backlight
AlphaRex ³ D21	412631	1	✓	✓				✓	✓	✓	✓			✓	✓		✓	✓	✓	✓	✓	✓
AlphaRex ³ D22	412641	2	✓	✓				✓	✓	✓	✓	✓		✓	✓		✓	✓	✓	✓	✓	✓
AlphaRex ³ D21 Astro	412654	1	✓	✓	✓			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
AlphaRex ³ D22 Astro	412657	2	✓	✓	✓			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
AlphaRex ³ DY22	412630	2	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓
AlphaRex ³ DY64	04770	4	✓	✓	✓	✓	✓		✓	✓	✓			✓	✓	✓	✓	✓	✓	✓	✓	✓

1) Pulse function can be programmed using input function with precision to the second

EcoRex Digital Time Switch

Weekly time switch



03705

Pack	Cat. Nos	EcoRex DII
1	03705	<ul style="list-style-type: none"> • 1 module • Easy creation of programs and navigation through the menus using a joystick which functions as a 5 way button, • Can be switched to constantly ON or OFF • Batteries (CR2032) can be easily replaced from the front due to the unit's modular design • 6 year running reserve for date and time • Automatic switching for daylight saving time <p>EcoRex D11, 1 channel</p> <ul style="list-style-type: none"> - 120-230V, 50/60Hz - 1 output, 250V a.c.16A~ cos φ = 1 - change over contact - 28 programs

EcoRex Digital Time Switch


Weekly time switch

■ Technical specifications

Type	EcoRex D11	
Cat. no.	037 05	
Nominal voltage	230V	120V
	50/60Hz	
Number of modules of 17.5mm each	1	
Number of channels	1	
Running reserve	6 years ¹⁾	
Shortest switching step	1 min	
Clock precision	1 s/day	
Switching capacity		
Ohmic 230V a.c. cos φ = 1	16A	
Inductive 230V a.c. cos φ = 0.6	13A	
Incandescent lamp load	1200W	
Fluorescent lamp series compensated	1400VA	
Energy-saving lamp	100W	
Switch output	1 changeover contact	
Programs	28	
Operating temperature	-10°C to +55°C	
Degree of protection	IP20 (mounted in distribution board)	

■ Connection diagram

EcoRex D11



MicroRex Analogue time switches

Daily and weekly time switches



Programmed via captive segment
 1-module device: min. 1 segment
 3-module device: min. 2 segments
 Power supply: 230V a.c. - 50/60 Hz
 3-position override switch "ON-AUTO-OFF" on front panel
 Manual changeover to summer/winter time
 1 outlet 16A - 250V a.c. - $\mu \cos \phi = 1$


Pack	Cat. No.	Daily programme		Number of modules
		1 segment = 15 minutes Accuracy: ± 5 minutes		
		Vertical dial		
		Minimum switching time: 15 minutes N/O contact		
1	412780	Without battery reserve		1
1	412790	With 100h battery reserve		1
		Horizontal dial		
		Minimum switching time: 15 minutes Changeover switch		
1	412812	Without battery reserve		3
1	412813	With 100h battery reserve		3
		Weekly programme		
		1 segment = 2 hours Accuracy: ± 30 minutes		
		Vertical dial		
		Minimum switching time: 2 hours N/O contact		
1	412794	With 100h battery reserve		1
		Horizontal dial		
		Minimum switching time: 4 hours Changeover switch		
1	412795	With 100h battery reserve		3

Programmable time switches


Analogue and digital wiring

Diagrams


Cat. No. 412780/90/94




Cat. No. 412812/13 and 412795




Cat. No. 04770

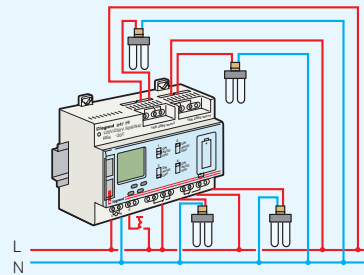


Cat. No. 412631



Cat. No. 412654



Cat. No. 412657



*Legrand strongly recommend the installation of modular contactors with all time switches.

Digital time switches characteristics

Cat. No.	Prog. time	Min. programme settings	Working reserve	Summer/winter time	Outputs 16A	Nb of prog.	Nb of modules
03705	7 d	1 min	6 years	auto	1	28	1
412630	d/w/y	1 s	5 years	auto	2	2 x 28	2
412631	24 h/7 d	1 s	5 years	auto	1	56	2
412641	24 h/7 d	1 s	5 years	auto	2	2 x 28	2

Analogue time switches characteristics

Cat. No.	Programme	Segment	Min. switching time	Working reserve	16A output via contact		Nb of modules
					N/O	Chang. S.	
412812	24 h	15 min	30 min	without	-	1	3
412813	24 h	15 min	30 min	100 h	-	1	3
412780	24 h	15 min	15 min	without	1	-	1
412790	24 h	15 min	15 min	100 h	1	-	1
412794	7 d	2 h	2 h	100 h	1	-	1
412795	7 d	2 h	4 h	100 h	-	1	3

CX³ modular contactors with handle

from 16A to 63A



412544



412556

Conform to IEC/EN 61095
Power supply busbar on top (up to 25A)

Pack	Cat. No.	Power contactors with 24V a.c. coil and handle			
		Manual override for test and repair function, carried out via the handle Permanent "ON" or "OFF" without automatic reset			
		2 pole - 250V a.c.			
		I max	Connection	Type of contact	Number of modules
1	412514	25A		2 N/O	1
1	412515	40A		2 N/O	2
1	412516	63A		2 N/O	2
		4 pole - 400V a.c.			
1	412517	25A		4 N/O	2
1	412518	40A		4 N/O	3
1	412519	63A		4 N/O	3
		Low noise power contactors with 230V a.c. coil and handle			
		2 pole - 250V a.c.			
		I max	Connection	Type of contact	Number of modules
1	412558	25A		2 N/O	1
1	412559	40A		2 N/O	2
1	412560	63A		2 N/O	2
		4 pole - 400V a.c.			
1	412561	25A		4 N/O	1
1	412562	40A		4 N/O	2
1	412563	63A		4 N/O	2

Pack	Cat. No.	Power contactors with 230V a.c. coil and handle			
		Manual override for test and repair function, carried out via the handle Permanent "ON" or "OFF" without automatic closing of the contactor			
		2 pole - 250V a.c.			
		I max	Connection	Type of contact	Number of modules
4	412544	25A		2 N/O	1
1	412545	40A		2 N/O	2
1	412547	63A		2 N/O	2
1	412548	63A		2 N/C	2
		3 pole - 400V a.c.			
1	412549	40A		3 N/O	3
1	412550	63A		3 N/O	3
		4 pole - 400V a.c.			
2	412551	25A		4 N/O	2
1	412553	40A		4 N/O	3
1	412556	63A		4 N/O	3
1	412557	63A		4 N/C	3

CX³ modular contactors without handle

from 16A to 63A

Auxiliaries

for CX³ modular contactors



412523



412535



412429



412431


Conform to IEC/EN 61095
Space for power supply busbar on top (up to 25A)

Pack	Cat. No.	Power contactors with 230V a.c. coil			
		2 pole - 250V a.c.			
		I max	Connection	Type of contact	Number of modules
4	412521	16A		N/C + N/O	1
10	412523	25A		2 N/O	1
1	412527	63A		2 N/O	2
1	412524	25A		2 N/C	1
		4 pole - 400V a.c.			
5	412535	25A		4 N/O	2
1	412541	63A		4 N/O	3
1	412536	25A		4 N/C	2
1	412533	25A		2 N/C + 2 N/O	2







Pack	Cat. No.	Signalling auxiliaries for contactors			
		Auxiliary changeover switch Used to signal the position status of the contacts on the product to which it is connected			
		For 1 module contactors 16A to 25A			
		I max	Voltage	contact	Number of modules
1	412429	5A	250V a.c.	N/C + N/O	0.5
		For 2 module contactors 25A			
		Maximum 2 auxiliary devices per contactor Fitted on left-hand side of contactor			
1	412430	5A	250V a.c.	N/C + N/O	0.5
		For 40 and 63A contactors			
		Maximum 1 auxiliary device per contactor Fitted on left-hand side of contactor			
1	412431	5A	250V a.c.	N/C + N/O	0.5

Delay Timers

12 to 230V a.c. and d.c.

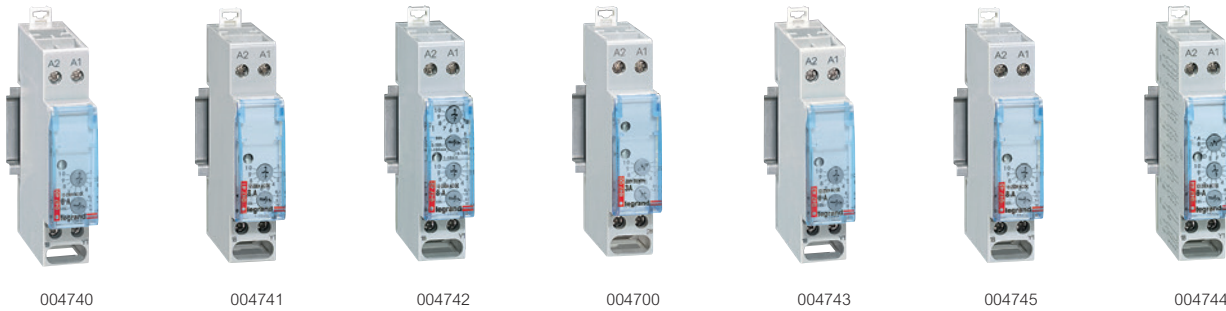

For controlling the switching ON or OFF of a circuit (lighting, ventilation, automation, signalling) in operation for a specific time from 0.1sec to 100hrs
 Supply voltage: 12 to 230V a.c. (50/60 Hz) and =
 Output: 8A - 250 V a.c. - $\mu \cos \varphi = 1$ per inverter contact

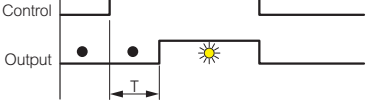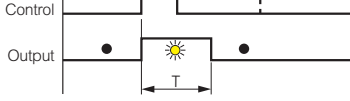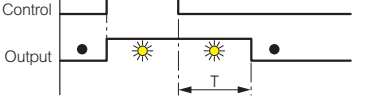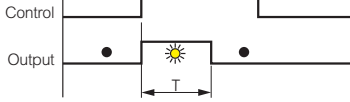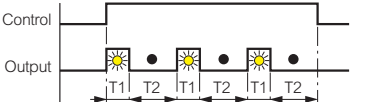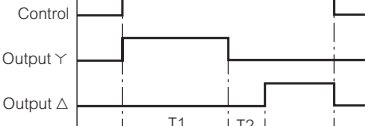Pack	Cat. No.	Delay timers	Number of modules	Pack	Cat. No.	Delay timers	Number of modules
1	004740	ON delay Delays load switch-on (alarm, lighting, contactor)  The time period starts when the relay is switched ON. At the end of the time period (T), the load is switched ON	1	1	004743	Timer (pulse) For switching a load ON for a specific time (contactor)  The time period (T) starts with the closing of the non-illuminated switch or pushbutton. At the end of the time period, the load is switched OFF	1
1	004741	OFF delay Delays load switch-off (ventilation, etc.)  The time period (T) starts with the opening of the non-illuminated switch or pushbutton. At the end of the time period, the load is switched OFF	1	1	004745	Wipe contact flick contactor For switching a load ON for a specific time  The time period (T) starts when the relay is switched ON. At the end of the time period (T), the load is switched OFF	1
1	004742	Flashing For switching ON and OFF a load (lighting, sounder) for different times and cyclically  For switching ON and OFF a load (lighting, sounder) for different times and cyclically	1	1	004744	Multifunction <ul style="list-style-type: none"> • ON delay • OFF delay • ON/OFF delay • Timer (pulse) • Timer and passing contact • Flashing • Totalizer on delay • Totaliser delay on power-up 	1
1	004700	Motor start (star / delta) For starting a load (motor) in 2 steps Double star-delta timing  For starting a load (motor) in 2 steps Double star-delta timing	1				

Brief description of programming functions

Weekly programs

To create a weekly program, select "MENU", "PROGRAM", and then "CREATE" to easily enter programs which are repeated on a weekly basis. A weekly program consists of a switch-on/switch-off times and days which are assigned as "switched-on" or "switched-off". The following predefined blocks can be selected: "MONDAY – SUNDAY", "MONDAY – FRIDAY"¹⁾ or "SATURDAY – SUNDAY"¹⁾; the assigned days of the week are fixed. The switch-on/switch-off times must be entered. The user can also set custom day blocks. By selecting "CUSTOM", switch times can be freely assigned to any days of the week. This option also allows the user to set switch times at midnight.
¹⁾ Excluding AlphaRex³ DY, AstroRex DY64

Yearly programs [AlphaRex³ DY21, AlphaRex³ DY22, AstroRex DY64]

This menu item allows the user to enter (additional) yearly programs, which are only executed within a defined validity period. They can overlap with one another and with the weekly programs on the same channel based on an "OR" connective. The validity period is defined by entering the start date (at 00:00:00) and the end date (at 24:00:00). The start date must be entered before the end date. With the "EVERY YEAR" option, the additional switch times have the same validity period each year (Christmas, national holidays, birthdays, etc.) Select the "ONCE" option when additional switch times are needed within a validity period (e.g. during holidays), but the start/end dates of the holiday period change from year to year.

Special programs (priority program) AlphaRex³ DY22, AstroRex DY64

Weekly and yearly programs on the same channel are not executed during the validity period of a special program. However, other special programs can be executed during the validity period. Different special programs can overlap with each other based on an "OR" connective. With the "EVERY YEAR" option, the additional switch times have the same validity period each year (Christmas, national holidays, birthdays, etc.). Select the "ONCE" option when additional switch times are needed within a validity period (e.g. during holidays), but the start/end dates of the holiday period change from year to year. Additional options include "MON TO SUN"/"CUSTOM": the respective channel only switches according to the special program; "PROG ON"/"PROG OFF": the respective channel is switched on/off during this time period.

Basic functions for "astro"

Location (astro) [AlphaRex³ D21 astro, AlphaRex³ D22 astro, AlphaRex³ DY22, AstroRex DY64]


The sunrise/sunset times, which change daily, are calculated for the location programmed in the AlphaRex. The unit is delivered with the location set to "GERMANY – SOEST" by default. Enter the actual location for optimal operation. This can be done in two ways. Select "MENU", "SET" and "ASTRO" to access the two options "LOCATION" and "COORDINATES". "LOCATION": With this menu item, the user can select the country and city which is closest to the site of operation. "COORDINATES": Alternatively, the user can select this menu item to set the geographical coordinates of the location. The longitude and latitude values are entered in degrees or degrees and arcminutes²⁾ (precision can be set in expert mode). Information on coordinates and time zones can be found in the time zone map included with every time switch.

Offset

By selecting "MENU", "SET", "ASTRO" and "OFFSET", time differentials can be set for the calculated switch times. This can be done in two ways: time offset or angle offset.

In time offset, a time differential can be entered to shift the switch time by up to +/- 120 min relative to the sunrise/sunset times.

In angle offset²⁾, a value can be entered in degrees and arcminutes to shift the switch time by up to +/- 12° 00' relative to the sunrise/sunset times. The time differentials are set separately for sunrise and sunset using the menu items "SUNSET" (opens the screen for setting the sunset offset) and "SUNRISE" (opens the screen for setting the sunrise offset).

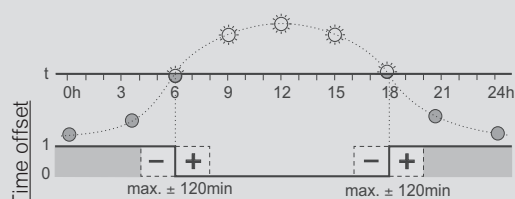

Example:

For a time differential of +30 min, the time switch switches 30 min. after sunrise and 30 min. after sunset.

For a time differential of -30 min, the time switch switches 30 min. before sunrise and 30 min. before sunset.

Offset correction function²⁾


Select "MENU", "SET", "ASTRO" and "CORRECTION" to set a time correction for the 6-month periods surrounding summer and winter. The time correction is set to 0 min. by default and can be set from 1 min. up to 30 min. The time correction for sunset is entered in the "SUNSET" menu item. The time correction for sunrise is set in the "SUNRISE" menu item. The correction function overlaps with the calculated astronomical switch times, including the offset settings.

Example:

Setting a time correction extends the daily switched-on time by up to 60 min. in the middle of the six winter months (switches off up to 30 min. later in the morning and switches on up to 30 min. earlier in the evening). In the middle of the six summer months, the time correction reduces the daily switched-on time by up to 60 min. (switches off up to 30 min. earlier in the morning and switches on up to 30 min. later in the evening). The time correction varies continuously between the two max. values during the rest of the year.

Basic settings using a PC and day key

All of the basic settings described above, with the exception of the current time and date, can be set up using the AlphaSoft software from Legrand and imported to the time switch using the data key. ²⁾ Excluding AstroRex DY64

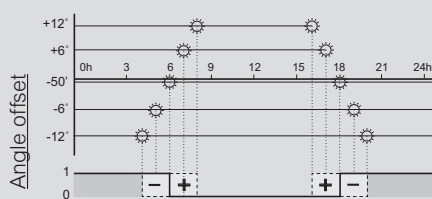

Note:

If the offset is set in degrees, the time switch always switches at points when the brightness is the same, despite the fact that the twilight duration changes over the course of the year. Sunrise and sunset correspond to -50' for the centre of the sun (the edge of the sun is visible on the horizon).

AlphaRex³ digital time switches

Additional functions

(Type-dependent – see selection table on page 7)

Relay function

The relay state can be changed by selecting “MENU” and “FUNCTIONS”. The relay is preset to the “AUTO” function; the time switch switches at the programmed times. The following can also be selected: “ALWAYS ON”, “ALWAYS OFF” and “EXTRA”. If “EXTRA” is selected, the switching status specified by the program is inverted. The time switch resumes switching according to the programmed switch times after the next switch command.

Holiday program

In holiday program, the holiday period is set with a start and an end date. It can be activated with the “ACTIVE” program item and deactivated with “PASSIVE”. If the holiday program is activated, the time switch does not carry out any programmed switch commands during this time period. Instead, it remains “ALWAYS OFF” or “ALWAYS ON” during the holiday period, as requested. When the holiday period has ended, the time switch resumes switching according to the programmed switch times.

1 h test

The “1 h TEST” function can be used for a switching simulation. If “1 h TEST” is activated, the switch outputs are switched for one hour. After the time has ended, the time switch resumes switching according to the programmed switch times.

PIN code

Input and programming can be locked using a four-digit “PIN CODE”. The time switch can be unlocked using the “PIN CODE”. The time switch can also be unlocked using the “RESET” function, which also deletes all settings and programs.

Operating hours counter

This function displays the time for which the relay has been switched on and the date of the last reset. Counting range: 65,535 h.

Contrast adjustment

This function allows the user to adjust the display contrast.

Expert mode*

Expert mode is activated by selecting “OPTIONS” and “EXPERT”. After expert mode is activated, the following additional functions can be used: control input “extra”¹⁾, control input “out”¹⁾, cycle function, channel-switching function (2-channel time switches), mains-synchronous operation, offset correction function²⁾, geographical coordinates in degrees and arcminutes²⁾.

¹⁾ AlphaRex³ D21s, AlphaRex³ D21 astro, AlphaRex³ DY21 ²⁾ AlphaRex³ astro, AlphaRex³ DY

Control input with switch-off delay

Adjustable switch-off delay via control input. The control input enables an additional switching of the relay, parallel to the switching program. The switch-off delay can be set from 0 s to 23 h 59 min 59 s. The switch-off delay begins as soon as the voltage is removed from the control input.

Control input “extra”*

Override of switching state via control input. If the “EXTRA” function is activated, the switching state specified by the program is inverted. The time switch resumes switching according to the programmed switch times after the next switch command. The “EXTRA” function is ended prematurely if the button is pressed again or if a pulse is received at the control input.

Control input “off”*

Switch off via control input. Activating the “OFF” function causes the time switch to be switched off via the control input. The “OFF” function is ended if the button is pressed again or if a pulse is received at the control input. The time switch resumes switching on/off according to the programmed switch times.


Pulse function

Programmable with precision to the second.

Cycle function

Function for cyclical switching. With this function, the time switch is switched on once within a defined time period and for a defined duration. The cycle time can be set between 2 s and 2 h. The switch-on time can be set between 1 s and 1 h 59 min 59 s.

	Min.	Max.
Cycle	2 s	2 h
Switch-on time	1 s	1 h 59 min 59 s

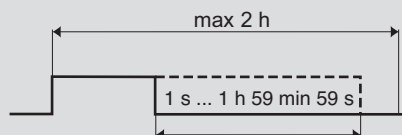

Random function

If the random function is activated, set switch times are randomly shifted within a range of +/- 15 minutes.

Channel-switching function*

With 2-channel time switches, this function can be activated so that the time switch regularly switches between the outputs assigned to the channels, in order to protect connected devices (for example lights/lamps) or so that two devices can be used simultaneously.

The channel-switching function is activated by selecting “MENU”, “OPTIONS” and “CHANNEL 1<>2”. The time switch switches between the outputs according to whether the menu item “DAILY” (once per day at 12:00 p.m.) or “WEEKLY” (once per week on Sunday at 12:00 p.m.) is selected.

Mains-synchronous operation

Mains-synchronised clock precision. By activating the “SYNC” function and then “ACTIVE”, the quartz-controlled time switch becomes a synchronous time switch.

*) Excluding AstroRex DY64



HPM Legrand Australia

Building 4, Nexus Industry Park
43-47 Lyn Parade, Prestons NSW 2170
Tel.: 1300 369 777
www.legrand.com.au

HPM Legrand New Zealand

106-124 Target Road
Glenfield, Auckland 0627
Tel.: 0800 476 009
www.legrand.co.nz