





This product is a connected accessory which **requires** you to buy and install the Arteor with Netatmo connected starter pack first.

Pack contents

Connected switch
for rolling shutters



Characteristics

 +45°C +5°C		
100-240 VAC 50/60 Hz	1 x 2.5 mm ² 2 x 1.5 mm ²	Rolling shutter motor
240 VAC max.		1 x 500 VA
100 VAC max.		1 x 270 VA

Safety instructions

This product should be installed in compliance with installation rules, preferably by a qualified electrician. Incorrect installation and/or incorrect use can lead to risk of electric shock or fire.


Before carrying out the installation, read the instructions and take account of the product's specific mounting location.

Do not open up, dismantle, alter or modify the device except where specifically required to do so by the instructions. All Legrand products must be opened and repaired exclusively by personnel trained and approved by Legrand. Any unauthorised opening or repair completely cancels all liabilities and the rights to replacement and guarantees. Use only Legrand brand accessories.


Before you start

If you plan to install switches for rolling shutters, read the following precautions:

To control a rolling shutter switch with one or more wireless controls, only use the products:



AND



Connected switch for rolling shutters

Wireless controls for rolling shutters
(not included in this pack)

Ensure you have wireless controls for rolling shutters for each additional control point.

To create a centralized control:

- Use one or more connected switches for rolling shutters.
- Use a wireless control for rolling shutters.

① Necessary safety precautions

1



Switch OFF the power at the main circuit breaker

OFF


2



Make sure that the power is OFF before continuing with the installation.


② Install the connected switch for rolling shutters

1




Remove the existing switch

3



② Wire the connected switch for rolling shutters

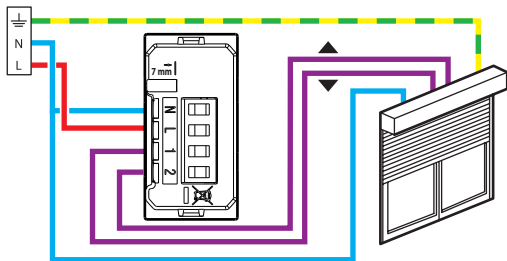

Frequency bands: 2.4 - 2.4835 GHz

Power level: < 100 mW

— N (neutral) = blue

— L (live) = any except blue and green/yellow

— \perp (earth) = green/yellow

The Arteor with Netatmo solution is compatible with rolling shutters with a mechanical or electronic stop, controlled by a standard wired switch for rolling shutters. They are not compatible with motors directly controlled by radio control. To check it, refer to the rolling shutter instructions.

③ **To add a connected product to your connected installation, you should follow the instructions:**

- in the **user guide in your connected starter pack**
- in the **Legrand Home + Control application (Settings/Add a new product section)**
- or consult the user manual on **legrand.fr**



www.legrand.fr/reference/574213

LEGRAND - Pro and Consumer Service - BP 30076
87002 LIMOGES CEDEX FRANCE • www.legrand.com

SIMPLIFIED EU DECLARATION OF CONFORMITY

The undersigned,

Legrand


declares that the radio-electric equipment referred to in these instructions
complies with directive 2014/53/EU.

The full text of the EU declaration of conformity
is available on the following website:

www.legrandoc.com




هذا المنتج هو جهاز متصل يتطلب منك أولاً شراء وتركيب علبة المنتجات الأساسية المتصلة ماركة
Arteor with Netatmo.

محتويات العلبة



المفتاح المتصل الخاص
بالسنانر اللفافة

مواصفات المنتج

 موتور الستارة اللفافة	 2.5 x 1 ملم ² 1.5 x 2 ملم ²	+45°م +5°م 
1 x 500 فولت أمبير	240-100 فولت تيار متردد 50/60 هرتز	
1 x 270 فولت أمبير	240 فولت تيار متردد بحد أقصى	
	100 فولت تيار متردد بحد أقصى	


إرشادات الأمان: ⚠️

يجب تركيب هذا المنتج طبقاً لقواعد التركيب ويفضل أن يقوم بالتركيب كهربائي مؤهل. فقد يؤدي التركيب الخاطئ و/أو الاستخدام الخاطئ إلى مخاطر التعرض لصدمة كهربائية أو نشوب حريق.
اقرأ النشرة قبل التركيب، وأفرد مكاناً لتركيب المنتج خاصاً به.
لا تفتح أو تفك أو تعطل أو تحوّر المنتج ما لم يُشر إلى ذلك بشكلٍ محدد في النشرة. فكل منتجات Legrand يجب فتحها وإصلاحها حصراً من قبل فنيين مدربين ومؤهلين لدى Legrand. وكلّ فتح أو إصلاح غير مسموح به يُبطل المسؤوليات وحقوق الاستبدال والضمانات. لا تستخدم سوى إكسسوارات من ماركة Legrand حصراً.

قبل بدء العمل

إذا كنت تنوي تركيب مفاتيح للستائر اللفافة، فاقرا الاحتياطات التالية:


للتحكم في مفاتيح الستائر اللفافة بواسطة وحدة تحكم لاسلكية واحدة أو أكثر، لا تستخدم سوى المنتجات التالية:



1
أو أكثر

وحدات التحكم اللاسلكية الخاصة بالستائر اللفافة
(ليست موجودة في هذه العلبة)

و



1

المفتاح المتصل الخاص بالستائر اللفافة

تأكد من وجود وحدات تحكم لاسلكية للستائر اللفافة لكل موضع تحكم إضافي.

لتوفير تحكم مركزي:

- استخدم واحدًا أو أكثر من المفاتيح المتصلة الخاصة بالستائر اللفافة.

- استخدم وحدة تحكم لاسلكية للستائر اللفافة.

① احتياطات السلامة الضرورية

2

تأكد من فصل التيار الكهربائي قبل متابعة خطوات عملية التركيب.



1


افصل التيار الكهربائي من القاطع الرئيسي للدائرة الكهربائية




مفصول

② تركيب المفتاح المتصل الخاص بالستائر اللفافة

3




1



قم بإزالة المفتاح الموجود

② قم بتوصيل أسلاك المفتاح المتصل الخاص بالستائر اللفافة

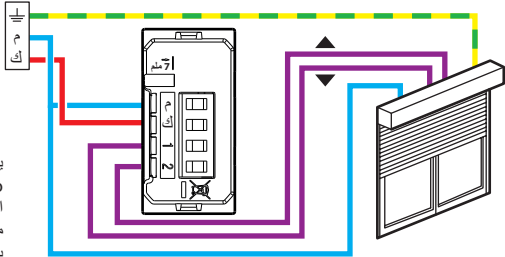

يتميز حل Arteor with Netatmo بالتوافق مع الستائر اللفافة ذات إيقاف ميكانيكي أو إلكتروني التي يتم التحكم فيها بواسطة مفتاح سلكي عادي للستائر

اللفافة. وهو غير متوافق مع المواتير التي يتم التحكم فيها مباشرة بواسطة جهاز تحكم لاسلكي. للتحقق من التوافق، راجع الإرشادات الخاصة بالستارة اللفافة.

نطاقات التردد: 2.4 - 2.4835 جيجاهرتز
مستوى القدرة: > 100 مللي واط

— م (محايد) = أزرق
— ك (خط كهربائي) = أي واحد فيما عدا الأزرق والأخضر/الأصفر
— ⚬ (أرضي) = أخضر/أصفر

③ لإضافة منتج متصل إلى المنتجات المتصلة المركبة لديك، يجب اتباع الإرشادات:

- الواردة في دليل المستخدم المرفق مع علبة المنتجات الأساسية المتصلة
- الموجودة في التطبيق **Home + Control** الخاص بشركة **Legrand** (القسم الإعدادات/إضافة منتج جديد)
- أو راجع دليل المستخدم المتوفر على **legrand.fr**



www.legrand.fr/reference/574213

LEGRAND - Pro and Consumer Service - BP 30076
87002 LIMOGES CEDEX FRANCE • www.legrand.com

SIMPLIFIED **EU** DECLARATION OF CONFORMITY

The undersigned,

Legrand

declares that the radio-electric equipment referred to in these instructions
complies with directive 2014/53/EU.

The full text of the EU declaration of conformity
is available on the following website:

www.legrandoc.com