


Datasheet

DLI LED Dimmable Downlight 5W to 7W, IP44

CAT. NO. DLI7001, DLI7002, DLI7003, DLI7003BL, DLI7004, DLI7004BL, DLI9001, DLI9002, DLI9003, DLI9003BL, DLI9004, DLI9004BL, DLI12501, DLI12502



A brand of **legrand**



DLI70 Series (Black DLI7003BL)

DLI70 Series

DLI90 Series

DLI125 Series


Cat. No.	Description	Ceiling cut-out	Wattage	Ceiling depth	Fascia size	Lumens	Colour temp	Beam angle	CRI	IP rating
DLI7001	Warm white / White finish	Ø 70mm	5W	66mm	Ø 94mm	505lm	3000K	90°	80+	IP44
DLI7002	Cool white / White finish					515lm	4000K	90°	80+	
DLI7003	Warm white / Brushed chrome finish					505lm	3000K	90°	80+	
DLI7003BL	Warm white / Black finish					505lm	3000K	90°	80+	
DLI7004	Cool white / Brushed chrome finish					515lm	4000K	90°	80+	
DLI7004BL	Cool white / Black finish					515lm	4000K	90°	80+	
DLI9001	Warm white / White finish	Ø 90mm	7W	70mm	Ø 110mm	700lm	3000K	85°	80+	
DLI9002	Cool white / White finish					820lm	4000K	85°	80+	
DLI9003	Warm white / Brushed chrome finish					700lm	3000K	85°	80+	
DLI9003BL	Warm white / Black finish					700lm	3000K	85°	80+	
DLI9004	Cool white / Brushed chrome finish					820lm	4000K	85°	80+	
DLI9004BL	Cool white / Black finish					820lm	4000K	85°	80+	
DLI12501	Warm white / White finish	Ø 125mm		76mm	Ø 150mm	750lm	3000K	90°	80+	
DLI12502	Cool white / White finish					880lm	4000K	90°	80+	
DLI12503	Warm white / Brushed chrome finish					750lm	3000K	90°	80+	
DLI12504	Cool white / Brushed chrome finish					880lm	4000K	90°	80+	

DLI LED Dimmable Downlight 5W to 7W, IP44

CAT. NO. DLI7001, DLI7002, DLI7003, DLI7003BL, DLI7004, DLI7004BL, DLI9001, DLI9002, DLI9003, DLI9003BL, DLI9004, DLI9004BL, DLI12501, DLI12502



A brand of **Legrand**

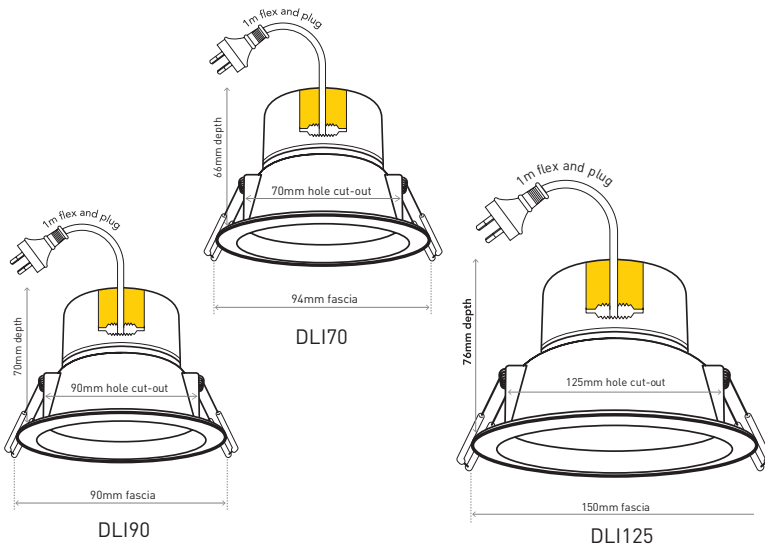

- Integrated dimmable driver compatible with trailing edge dimmers
- Smooth dimming range
- Suitable for 70mm, 90mm and 125mm hole cut-outs
- Only 5W to 7W power consumption
- Up to 880 lumens output
- Maximum efficacy up to 125lm/W
- Insulation Contact - Fire Resistant (IC-F) recessed luminaire: An IC-F rated downlight means that building insulation that can be continuously exposed to 90°C, can safely abut and cover the luminaire. Additionally, IC-F rated downlights have to pass a 1mm probe test i.e. a 1mm diameter probe cannot enter any part of the luminaire and in effect no insulation or any other material can enter the fitting.
- Low ceiling depth
- Suitable for slab canisters
- 35,000h lifespan
- 3 Year Warranty

Single product			
Cat. No.	Single Barcode	Dimensions	Weight
DLI7001	9321001455134	100 x 100 x 80mm	220g
DLI7002	9321001455141		
DLI7003	9321001455493		
DLI7003BL	9321001481270		
DLI7004	9321001455509	118 x 118 x 90mm	265g
DLI7004BL	9321001481294		
DLI9001	9321001451655		
DLI9002	9321001451662		
DLI9003	9321001455479	161 x 161 x 98mm	333g
DLI9003BL	9321001481317		
DLI9004	9321001455486		
DLI9004BL	9321001481331		
DLI12501	9321001451679	161 x 161 x 98mm	333g
DLI12502	9321001451686		
DLI12503	9321001487814		
DLI12504	9321001487838		

DLI70 Outer box (Qty 48)			
Cat. No.	Barcode	Dimensions	Weight
DLI7001	9321001455158	420 x 320 x 345mm	13.5Kg
DLI7002	9321001455165		
DLI7003	9321001455530		
DLI7003BL	9321001481287		
DLI7004	9321001455547		
DLI7004BL	9321001481300		

DLI90, DLI125 Outer box (Qty 24)			
Cat. No.	Barcode	Dimensions	Weight
DLI9001	9321001451693	495 x 250 x 300mm	8.5Kg
DLI9002	9321001451709		
DLI9003	9321001451693		
DLI9003BL	9321001481324		
DLI9004	9321001455516	670 x 340 x 325mm	11.5Kg
DLI9004BL	9321001481348		
DLI12501	9321001455523		
DLI12502	9321001451723		
DLI12503	9321001487821	670 x 340 x 325mm	11.5Kg
DLI12504	9321001487845		

Legrand - Australia
1300 369 777
www.hpm.com.au
ABN 31 000 102 661

Legrand - New Zealand
0800 476 009
www.hpm.co.nz

Refer to your group buying office, Legrand Sales Representative or Legrand Sales Office for pricing.

Please note: specifications are subject to change without prior notice.

