



The Twin LED Spotlight can be fixed to the wall either directly or using the lugs provided.



- 1. Fix the box to the wall either directly through the 4 channels in the box or using the lugs. Use 8 to 12 gauge screws (not supplied).
- 2. Open the box and drill a \emptyset 20mm hole in the desired cable entry location, taking care to avoid damaging internal components.
- 3. Install the supplied cable gland in the \emptyset 20mm hole. This is necessary to maintain the IP rating.
- Fit the power cable through the gland and terminate into the terminal block. Cable gland is compatible with circular cable 8-10 mm in diameter.
 e.g. 3-core heavy duty (H07VV-F) 1.0mm² or 1.50 mm² flexible cord.
- 5. Close the Twin spotlight cover and lock into position.


Note: For DALI models, connect the DALI cable to the DALI terminals. If the DALI cable is separate from the power cable, an additional cable gland will be required.

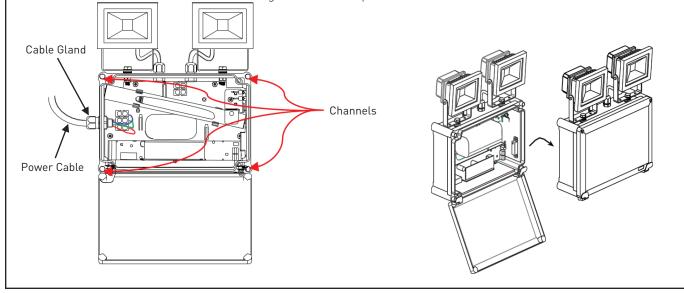

TWIN LED SPOTLIGHT INSTALLATION INSTRUCTIONS



Test Switch

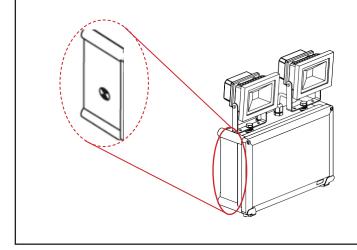

The test switch on this product is a magnetic type so that the weatherproof seal does not have to be opened. To perform a manual test, hold a magnet against the product surface near the "Magnetic Test Switch" label.

Warranty

Legrand guarantees this lighting unit for a period of 5 years from date of despatch, solely against failure arising from faulty materials or workmanship, and provided that the unit has been stored, shipped, installed, used and maintained in accordance with the manufacturers instructions and relevant standards. Consult Legrand Conditions of Sale for details on warranty liability. If this lighting unit is faulty, return the unit freight pre-paid to your point of purchase, or contact Legrand.

Customer Service

For all Customer Service and Technical Support enquires please call Monday to Friday during business hours.

Legrand Australia 1300 369 777 www.legrand.com.au

Legrand New Zealand 0800 476 009 www.legrand.co.nz

ABN: 31 000 102 661