



Arteor™
USB Type-A + USB Type-C charger
USB Type-C charger

Cat. No(s): 5 700 77/78 - 5 710 77/78 - 5 720 72/77 - 5 725 72/77



5 720 77 - 5 725 77
 5 700 77 - 5 710 77



5 720 72 - 5 725 72
 5 700 78 - 5 710 78


1. USE

For recharging portable devices such as phones, smartphones, tablets, MP3 or MP4 players, loudspeakers, watches, game consoles, powerbanks.

2. RANGE

USB chargers 5.0 V [~] / 3.0 A	White	Magnesium
1 USB Type-A + 1 USB Type-C (1 output Type-A - 1 output Type-C)	5 720 77	5 725 77
1 USB Type-C (2 outputs Type-C)	5 720 72	5 725 72
USB chargers 5.0 V [~] / 3.0 A	Soft Alu	Champagne
1 USB Type-A + 1 USB Type-C (1 output Type-A - 1 output Type-C)	5 700 77	5 710 77
1 USB Type-C (2 outputs Type-C)	5 700 78	5 710 78

3. OVERALL DIMENSIONS

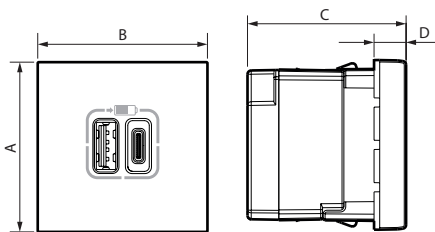

A	B	C	D
45	45	42	8.5

4. CONNECTION

Circuit breaker: 16 A max.



Type of terminals: with screws
 Terminal capacity: 2 x 2.5 mm²
 Stripping length: 6 mm
 Screwdriver: flat 3.5 mm

5. TECHNICAL CHARACTERISTICS

■ **5.1 Mechanical characteristics**

Impact tests: IK 04
 Penetration by solid bodies/liquid: IP 40

■ **5.2 Material characteristics**

Base: PC V-0 class
 Cover-plate: PC
 Self-extinguishing:
 850°C/30 s for insulating parts holding live parts in place.
 650°C/30 s for other insulating components.

■ **5.3 Climatic characteristics**

Storage temperature: - 20°C to + 70°C
 Operating temperature: 0°C to + 45°C

■ **5.4 Electrical characteristics**

All values listed below are measured at an ambient temperature of + 20° and after 30 minutes of operation.

Nominal input voltage	100-240 V~
Nominal input frequency	50/60 Hz
Nominal output voltage	5.0 V [~]
Nominal input current	0.3 A
Maximum output current Type-A + Type-C	3.0 A shared on A and C output
Maximum output current Type-C	3.0 A
Power consumption	15.0 W
Average efficiency in active mode	80.3 %
Stand-by power consumption	< 0.07 W
Consumption class without load and average level of efficiency: Level VI*	
Protection class	II - Low voltage

*Nota: European Regulation No. 278/2009 of 6 April 2009, Directive 2009/125 EC on eco-design requirements for AC/DC power supplies.

Note : To optimize the charging time of your device, ensure turn it off during the charging phase.

6. CLEANING

Surface cleaning with a cloth.
Do not use: acetone, tar remover, trichlorethylene.

Caution: Always test before using other special cleaning products

7. STANDARDS AND APPROVALS

Compliance with installation and manufacturing standards.
Refer to e-catalogue.