


Datasheet

ARTEOR™ with NETATMO

Smart Dimmer Horizontal-1 Gang

CAT. NO. AWNHDM1WE AWNHDM1MGN, AWNHDM1ALU, AWNHDM1CHP

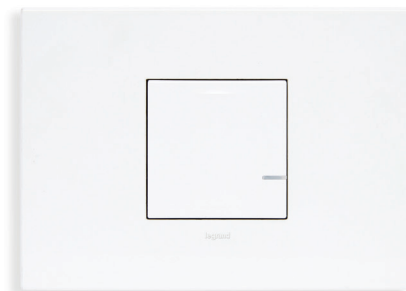

Cat No.	AWNHDM1WE	AWNHDM1MGN	AWNHDM1ALU	AWNHDM1CHP
Colour	White (WE)	Magnesium (MGN)	Aluminium (ALU)	Champagne (CHP)
Description	Smart Dimmer Horizontal 1 Gang, 2 Module, 2 Wire			
Nominal Input Voltage	230 - 240 V a.c. 50Hz			
Load stabilizing capacitor	Supplied in box			
Min. Load	Refer to table at the back			
Max. Load	Refer to table at the back			
No. of Gang	1 Gang			
No. of Module	2 Module			
Wired/Wireless	Wired			
IP Rating	IP2X			
Mounting Centre	84 mm			
Product Dimension (W X H X D)	127 X 92 X 42 mm			
Cutout Dimensions (WxH)	96 x 56 mm			
Wireless Connectivity	Zigbee 2.4Ghz to 2.4835Ghz			
Compliance	AS/NZS 60669.2.1, ETSI EN 300 328, AS/NZS 4268			

ARTEOR™ with NETATMO Smart Dimmer Vertical – 1 Gang



CAT. NO. AWNVDM1WE, AWNVDM1MGN, AWNVDM1ALU, AWNVDM1CHP

- Smart dimmer switch to expand an Arteor with Netatmo installation. (requires installation of Starter kit or Basic kit)
- 3 ways to control for better user convenience: standard press on the dimmer switch, via smart devices or voice control.
- Compatibility with all 3 voice assistants: Apple SIRI, Google Home and Amazon Alexa.
- Energy consumption display to keep track of energy consumption.
- Push notifications to stay informed of home status.
- Arteor range: elegant design and stylish 17 coverplates finishes available.
- Supplied complete with support frame, coverplate, paint cover, and load stabilising capacitor.
- Easy to install.
- User-friendly app.

Single product		
Cat No.	Barcode	Dimensions
AWNVDM1WE	9321001488781	160 X 130 X 90mm
AWNVDM1MGN	9321001488934	
AWNVDM1ALU	9321001489078	
AWNVDM1CHP	9321001489221	

Outer Box (QTY 10)		
Cat No.	Barcode	Dimensions
AWNVDM1WE	9321001489382	160 X 130 X 90mm
AWNVDM1MGN	9321001489535	
AWNVDM1ALU	9321001489672	
AWNVDM1CHP	9321001489825	

Load Characteristics

			Dimmable LED 			
100-240 VAC 50/60 Hz	1 x 2.5 mm ²					
240 VAC	Max.	300 W	(*)60 W	60 W	300 VA	300 VA
	Min.	7 W	5 W	9 W	10 VA	35 VA
100 VAC	Max.	150 W	(*)30 W	30 W	150 VA	150 VA
	Min.	7 W	5 W	9 W	10 VA	35 VA

[*] Or 10 lamps max. For comfortable lighting, we recommend using bulbs of the same type and brand.

[**] Use only with transformers designed to function with electronic switches. Take account of transformer losses when calculating power. Transformers must be loaded at more than 60% of their power.

With the dimmer option operating mode (which can be activated with the App), this switch only works with variable intensity bulbs (which can be identified by the logo on the packaging).

Legrand Australia
1300 369 777
www.legrand.com.au
ABN 31 000 102 661

Legrand New Zealand
0800 476 009
www.legrand.co.nz

Refer to your group buying office, Legrand Sales Representative or Legrand Sales Office for pricing.

Please note: specifications are subject to change without prior notice.