


Specification


All Models	
Supply voltage	230 - 240V a.c 50Hz
Ambient Temperature	- 40°C to 40°C for LED head 10°C to 40°C for Remote gear
IP Rating	IP55 for LED head IP20 for Remote gear
Net Weight	0.90 kg

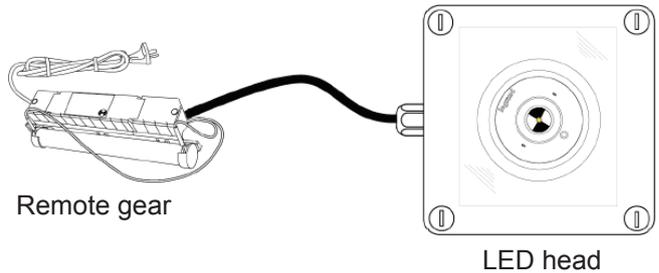


Installation

Direct ceiling Mount


1. Prior to mounting the unit, unlock the cover via 4 x quarter turn and open the cover. Take out the gear tray.




2. Drill a Ø 20mm hole on the side of the unit in desired location.
3. Fix the box onto the ceiling through 4 channels, use 8-12 guage screws. (not supplied).

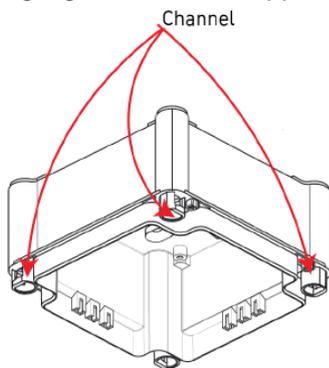

4. Install the gland in position. Make sure it is installed properly to retain IP rating.

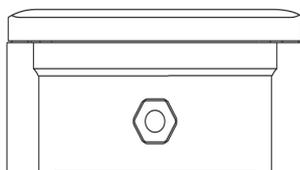

5. Fix the remote emergency power pack out side the freezer in a secured location. Fix the gear tray in position.

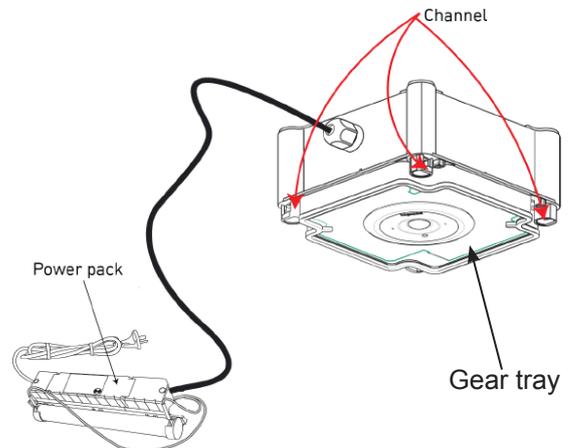

Note: For wireless models, make sure the antenna is in upright position.
For DALI models, connect the two DALI wires to the DALI terminals.

6. Close the cover and lock into position.

