





Datasheet

Freezer LED Satellite

CAT. NO. 659553D

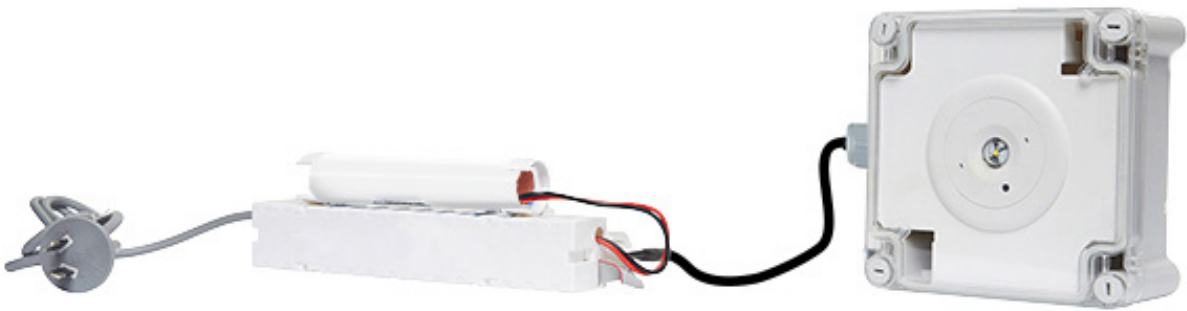


Colour	Grey
Type	DALI
Operating Mode	Non-maintained
Nominal Input Voltage	230 - 240 V a.c. 50 Hz
Battery	NiMH 6 V, 4.0 Ah
Power Consumption	3.3 W (Charge) / 1.1 W (Standby)
Inrush Current	10 A peak
Light Source Life (LSL)	100,000 hrs
Constructions (Lid/Box)	Transparent Polycarbonate / Polypropylene
Operating Temperature	-40°C to 40°C (for LED head) 10°C to 40°C (for Remote gear)
Lighting Classification	C ₀ /C ₉₀ D32
IP Rating	IP55 (for LED head) IP20 (for Remote gear)
IK Rating	IK07
Compliance	AS/NZS 2293, AS/NZS 60598
Product Marking	  

Freezer LED Satellite

CAT. NO. 659553D



DIMENSIONS

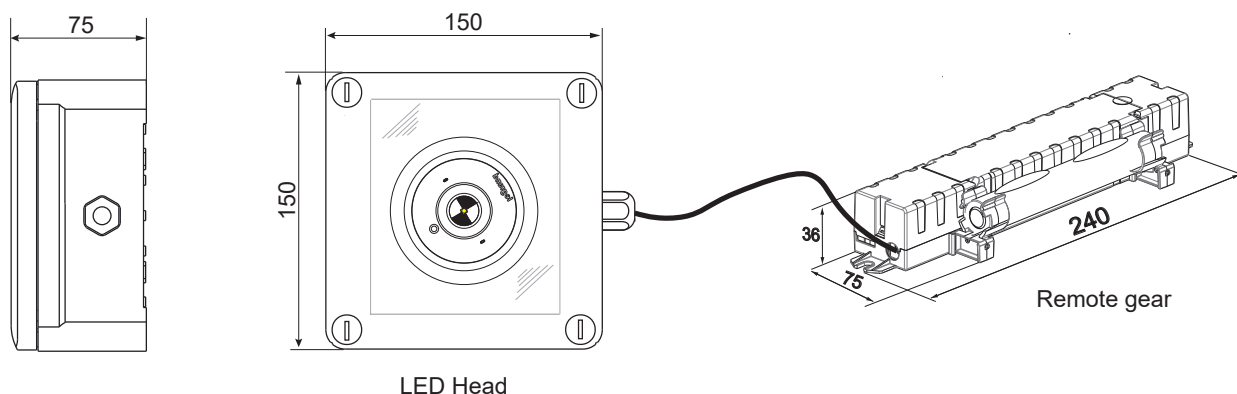

Note: All the dimensions are in mm.

FEATURES

- Suitable for both small to medium areas.
- Cool and Freezer room applications.
- D32 Emergency classification.
- Surface Mount with remote gear.
- Designed and Manufactured in Australia.

Cat.No.	Description
DALI	
659553D	Freezer LED Satellite, IP55, NiMH, Remote gear with 3m cable

SPACING TABLE

Maximum spacing between luminaries for 0.2lux (Australia) as per AS/NZS 2293:2018

Mounting Height	3m	3.3m	3.6m	4m	4.5m	5m
Distance	16.5m	18.1m	19.5m	20.1m	20.7m	21.2m

Maximum spacing between luminaries for 1lux (New Zealand) as per AS/NZS 2293:2018

Mounting Height	3m	3.3m	3.6m	4m	4.5m	5m
Distance	10.1m	10.2m	10.3m	10.3m	10.3m	10.1m

Legrand Australia
1300 369 777
www.legrand.com.au
ABN 31 000 102 661

Legrand New Zealand
0800 476 009
www.legrand.co.nz

Refer to your group buying office, Legrand Sales Representative or Legrand Sales Office for pricing.

Please note: specifications are subject to change without prior notice.

LE11878ABB

07_2019