


# Datasheet

## Economy Weatherproof LED Batten - DALI Mains



CAT. NO. 659608D, 659610D, 659612D



Cat .No.	659608D	659610D	659612D
Description	L6 LED BATTEN	L12 LED BATTEN	L15 LED BATTEN
Supply voltage	230 - 240 V a.c. 50Hz		
Light source	LED (4000 K)		
Chromaticity Tolerance	MacAdam Ellipse: 4 SDCM		
Luminous flux (lm)	2,100	4,600	5,700
Circuit power (W)	22	49	57
Luminaire efficacy (lm/W)	95	94	100
Power factor	0.88	0.96	0.97
Inrush current	TBA	TBA	TBA
Driver type	Dimmable - DALI		
IK rating	IK08		
IP rating	IP65		
Retaining clips	304 Stainless Steel		
Body construction	Polycarbonate		
Diffuser	Opal polycarbonate		
Length (mm)	664	1274	1574
Weight (kg)	1.4	2.4	2.9
Compliance	AS/NZS 60598		
Product Marking	 		

# Economy Weatherproof LED Batten - DALI Mains


CAT.NO. 659608D, 659610D, 659612D



## FEATURES

- Available in 2 foot, 4 foot or 5 foot lengths.
- Three lumen packages: 2100lm, 4600lm or 5700lm, 4000K colour temperature.
- DALI dimmable for further energy saving.
- LED Light source life of 50,000hrs L70 at ambient temperature of 25°C.
- CRI > 80
- Large terminal block.
- Quarter turn gear tray fasteners for ease of maintenance.
- 5 Year Warranty.

## DIMENSIONS

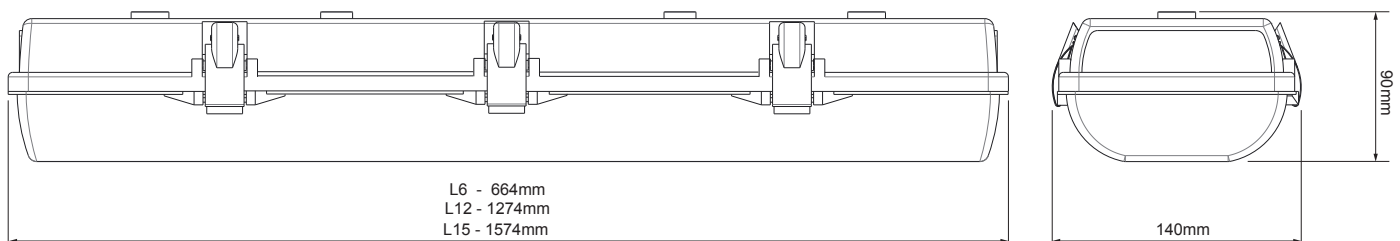

Legrand - Australia  
1300 369 777  
[www.legrand.com.au](http://www.legrand.com.au)  
ABN 31 000 102 661

Legrand - New Zealand  
0800 476 009  
[www.legrand.co.nz](http://www.legrand.co.nz)

Refer to your group buying office, Legrand Sales Representative or Legrand Sales Office for pricing.

Please Note: specifications are subjected to change without prior notice.