

Take Safety Seriously

Photoelectric Smoke Alarm 240V



643085*

Self calibration capacity

New mesh covering surrounding the chamber

Dust protection bag included

Photoelectric smoke alarm is ideal for smoldering fire detection

Technology recommended by fire authorities

Interconnectable – up to 20 units

Surface-mounting for easy fit-off

Clear power and alarm indicator

Accessible HUSH/TEST button

Low battery indicator (Audio and Visual)


 **legrand**[®]

Photoelectric Smoke Alarm, 240V




SPECIFICATIONS

Cat No.	643085	Depth:	49mm
Colour:	White	Mounting centre:	84mm
Type:	Photoelectric	Siren sound level:	85db at 3m
Diameter:	147mm	Supply Voltage:	230-240V a.c.

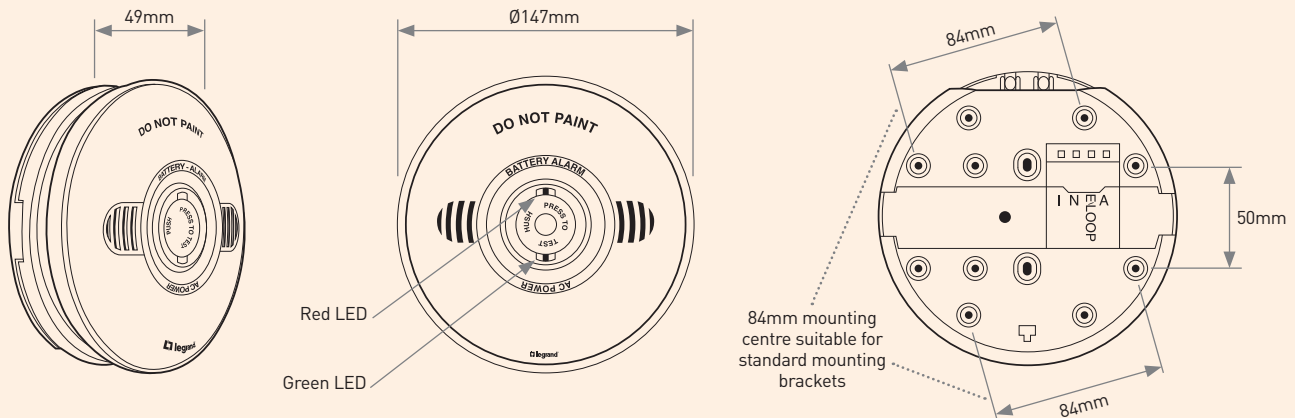


Self Calibration Capacity

Every 24 hours the device automatically adjusts the detection sensitivity. This feature reduced the incidence of false alarms due to dust built up inside the detection chamber, while fully maintaining its smoke detection sensitivity.

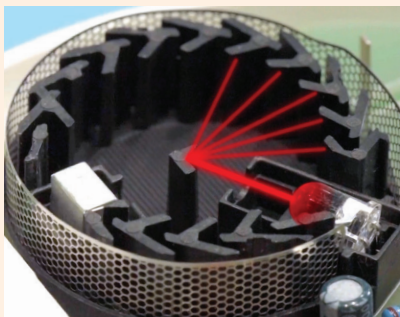

New Mesh Covering Surrounding the chamber

The fine material of the mesh covering will reduce the penetration of smaller dust particles.

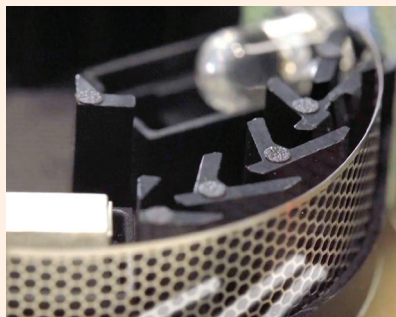

Dust Protection Bag

To minimise dust or dry-wall particles entering the unit during installation, the smoke alarm is fitted with a dust protection bag.



Legrand Australia
1300 369 777
www.legrand.com.au

Legrand New Zealand
0800 476 009
www.legrand.co.nz

 **legrand**®