



# Arteor™ Blanking plates


Cat. no(s): 5 700 60/61 - 5 710 60/61 - 5 723 41/42/43 - 5 728 19/20/41/42/43  
 5 730 86/96 - 5 731 86/88/89/96



5 700 60 - 5 710 60  
 5 723 41 - 5 728 41



5 730 96 - 5 731 96 - 5 731 89



5 723 43 - 5 728 19/20/43


## 1. USE

Blanking plates.

## 2. RANGE

	Designation	Finishes.				No. of modules	Fixing method
		White	Magnesium	Soft alu	Champagne		
	Blanking plate square	5723 41	5728 41	5 710 60	5 700 60	1	with clips
	Blanking plate square	5723 42	5728 42	5 710 61	5 700 61	2	with clips
	Blanking plate round	5730 86	5731 86	5 730 88	-	2	with clips
	Blanking plate square)	5723 43	5728 43	5 728 19	5 728 20	3	with clips
	Blanking plate round	5730 96	5731 96	5 731 89	-	3	with clips

## 3. OVERALL DIMENSIONS

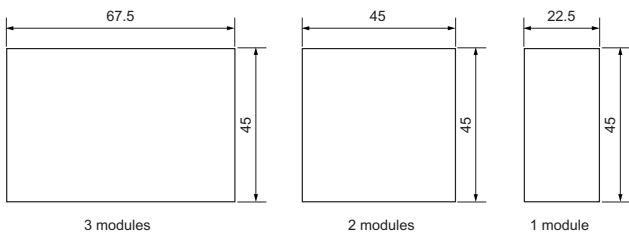

## 4. TECHNICAL CHARACTERISTICS

- **4.1 Mechanical characteristics**  
Impact tests : IK 04
- **4.2 Material characteristics**  
Plates : Polycarbonate
- **4.3 Climatic characteristics**  
Storage temperatures : - 10°C to + 70°C  
Operating temperatures : - 5°C to + 50°C

## 5. CLEANING

Surface cleaning with a cloth.  
Do not use : acetone, tar remover, trichloroethylene.

### ■ 5.1 Resistance to cleaning agents

Resistance to the following agents : Hexane (EN 60669-1), Methylated spirits, Soapy water, Diluted ammonia, Diluted pure bleach 10%, Glass cleaning substance, Pre-impregnated wipes.

**Caution:** Always test before using other special cleaning products.

## 6. STANDARDS AND APPROVALS

Compliance with installation and manufacturing standards.  
Refer to e-catalogue.