


## IP Touch Screen adapter


3496

### Description

This accessory, to be used in conjunction with L4684, H4684, HW4684 or AM5864 TOUCH SCREENS can be used to play remote audio files found on the server (e.g. on the PC connected to the local network), or audio IP Contents (e.g. radio streaming), through 2 wire stereo sound systems. By using the RJ45 connection of the TOUCH SCREEN, and connecting this to the local network linked to the PC, server etc., the TOUCH SCREEN adapter sends the audio files of the various devices towards the Sound System.

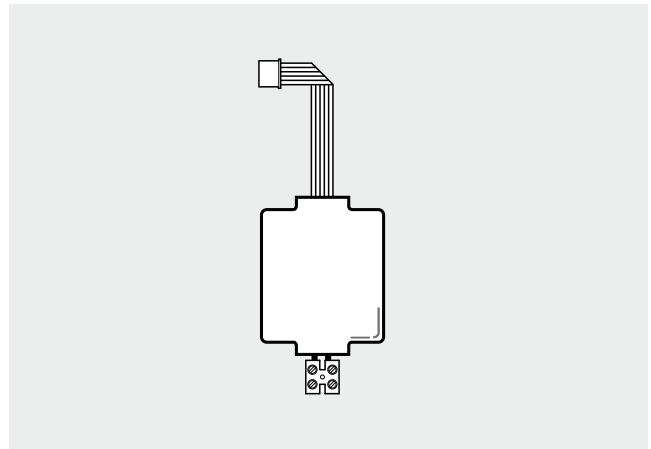

### Installation mode

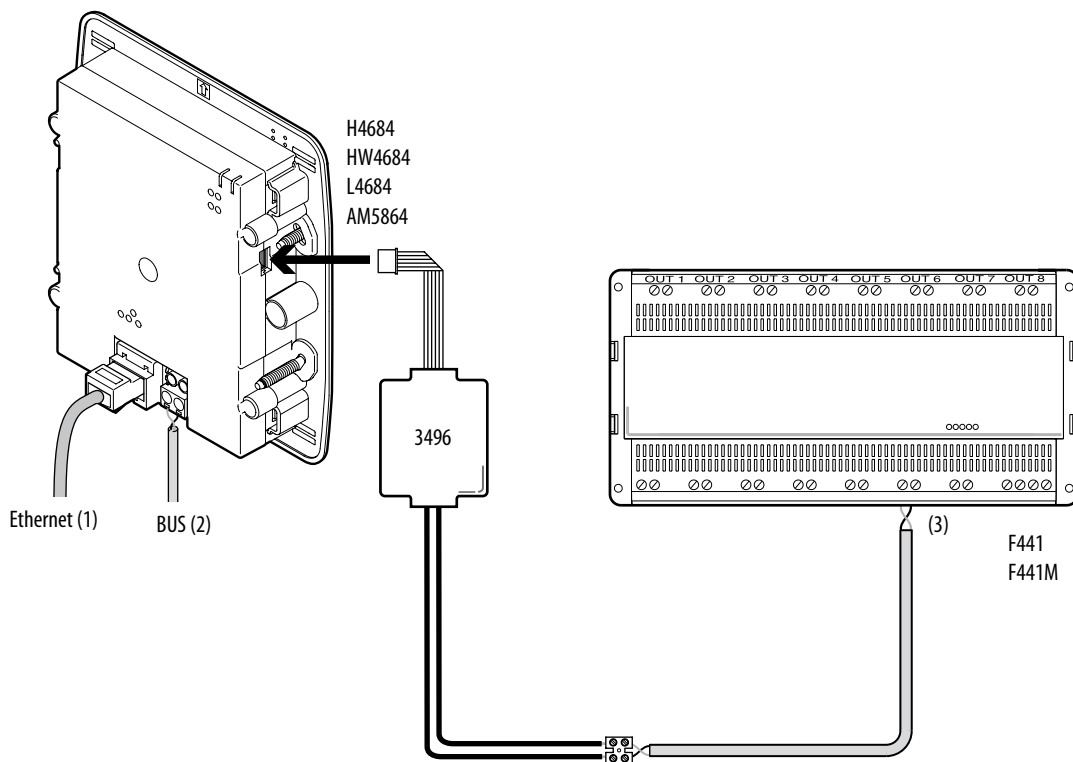

**NOTE:** (1) cable connection to the local LAN network.

(2) the BUS line output must be connected to the mixers item F441 or item F441M, or to the power supply line of the BUS themselves. In case of integration with the Automation system, it may be connected to the automation BUS.

(3) when connected to the F441M matrix, the device cannot be wired to the "S1" clamp of the sound sources.