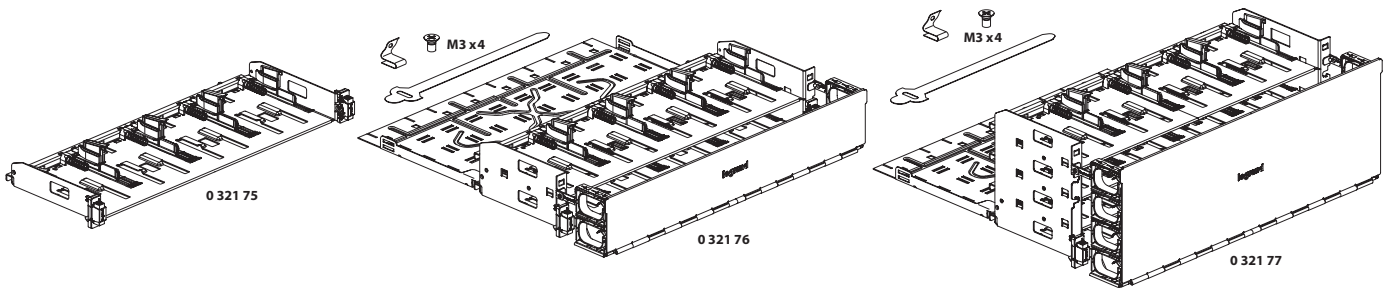


## 19" modular panels to be equipped with cassettes

Cat. No(s): 0 321 05/22/26/28/46/75/76/77/78  
 0 337 57



### 1. PRESENTATION

19" modular panels to be equipped with automatically removable cassettes.

0 321 75 - 1U HD panel: 4 standard cassettes or 8 slim cassettes

0 321 76 - 2U HD panel: 8 standard cassettes or 16 slim cassettes

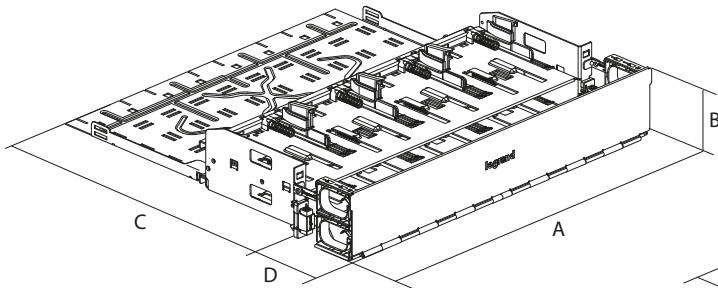
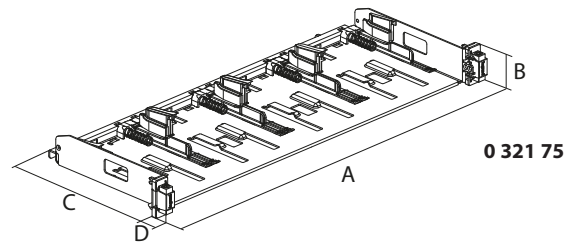
0 321 77 - 4U HD panel: 16 standard cassettes or 32 slim cassettes

Equipped with the new-generation Soluclip system for automatic (screwless) fixing on rack or cabinet uprights (Soluclips having been designed to adapt to uprights from 1.5 to 2 mm maximum thickness).

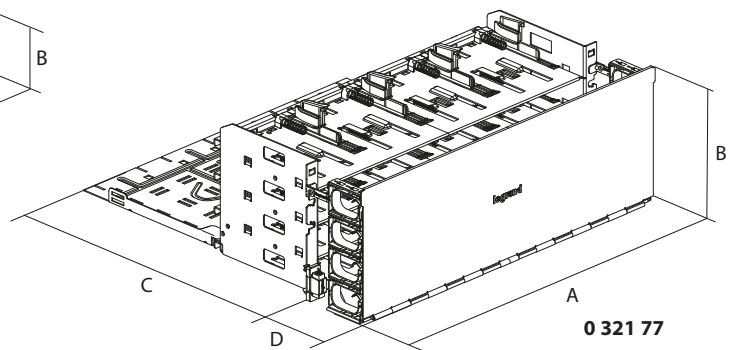
Universal mounting on all racks or cabinets with automatic earthing on unpainted uprights. Painted uprights can be connected to earth with a cord and a screw connection.

#### • Panel dimensions (mm)

Cat. Nos.	A	B	C	D
0 321 75	483	44	182	19
0 321 76	483	89	393	99
0 321 77	483	178	393	99



0 321 76







0 321 77


#### • Approximate panel weight (kg)



Cat. Nos.	Weight (kg)
0 321 75	1.2
0 321 76	4.1
0 321 77	6.5






2. CASSETTE AND BLOCK RANGES

	<b>0 321 38</b>	HD holder for slim cassette
	Slim cassettes	
	<b>0 321 68</b>	Slim preterminated cassette (50/125 µm) 12 multimode OM3 FO 12 LC connectors to MTP connector with 12 fibres, universal polarity, Ultra performance
	<b>0 321 69</b>	Preterminated slim cassette (50/125 µm) 12 multimode OM4 FO 12 LC connectors to MTP connector with 12 fibres, universal polarity, Ultra performance
	<b>0 321 70</b>	Preterminated slim cassette (50/125 µm) 12 multimode OS2 FO 12 LC connectors to MTP connector with 12 fibres, universal polarity, Ultra performance
	"Made-to-order"	Other adapter, fibre or polarity type available "made-to-order"
	<b>*0 321 39</b>	Blanking plate for slim cassette holder *only for Cat. No. 0 321 38

	MTP cassettes	
	<b>0 321 42</b>	Preterminated cassette (50/125 µm) 24 multimode OM4 FO 24 LC connectors to 2 MTP connectors with 12 F, polarity A/C, Ultra performance
	<b>0 321 44</b>	Preterminated cassette (9/125 µm) 24 singlemode OS2 FO 24 LC connectors to 2 MTP connectors with 12 F, polarity A/C, Ultra performance
	<b>0 321 43</b>	Preterminated cassette (50/125 µm) 12 multimode OM4 FO 12 SC connectors to MTP connector with 12 fibres, polarity A/C, Ultra performance
	<b>0 321 45</b>	Preterminated cassette (9/125 µm) 12 singlemode OS2 FO 12 SC connectors to MTP connector with 12 fibres, polarity A/C, Ultra performance
	<b>0 321 48</b>	Preterminated cassette (50/125 µm) 12 multimode OM4 FO 12 LC connectors to 1 MTP connector with 12 F, polarity A/C, Ultra performance
	<b>0 321 49</b>	Preterminated cassette (9/125 µm) 12 singlemode OS2 FO 12 LC connectors to 1 MTP connector with 12 F, polarity A/C, Ultra performance
	<b>0 321 59</b>	Preterminated cassette (50/125 µm) 12 multimode OM4 FO 12 SC connectors to MTP connector with 12 F, universal polarity, Ultra performance
	<b>0 321 60</b>	Preterminated cassette (9/125 µm) 12 singlemode OS2 FO 12 SC connectors to MTP connector with 12 fibres, universal polarity, Ultra performance
	"Made-to-order"	Other adapter, fibre or polarity type available "made-to-order"

	Spliceable cassettes - supplied with pigtails and blocks	
	<b>0 321 80</b>	Spliceable FO cassette 0 321 41 + SC block for 6 multimode fibres 0 321 20 + 6 OM3 SC pigtails 1m 0 322 20
	<b>0 321 82</b>	Spliceable FO cassette 0 321 41 + SC block for 12 multimode fibres 0 321 21 + 12 OM3 SC pigtails 1m 0 322 20
	<b>0 321 84</b>	Spliceable FO cassette 0 321 41 + SC block for 6 singlemode fibres 0 321 10 + 6 OS2 SC pigtails 1m 0 322 41
	<b>0 321 86</b>	Spliceable FO cassette 0 321 41 + SC block for 12 singlemode fibres 0 321 11 + 12 OS2 SC pigtails 1m 0 322 41
	<b>0 321 81</b>	Spliceable FO cassette 0 321 41 + LC block for 6 multimode fibres 0 321 23 + 6 OM3 LC pigtails 1m 0 322 21
	<b>0 321 83</b>	Spliceable FO cassette 0 321 41 + LC block for 12 multimode fibres 0 321 24 + 12 OM3 LC pigtails 1m 0 322 21
	<b>0 321 85</b>	Spliceable FO cassette 0 321 41 + LC block for 6 singlemode fibres 0 321 13 + 6 OS2 LC pigtails 1m 0 322 43
	<b>0 321 87</b>	Spliceable FO cassette 0 321 41 + LC block for 12 singlemode fibres 0 321 14 + 12 OS2 LC pigtails 1m 0 322 43

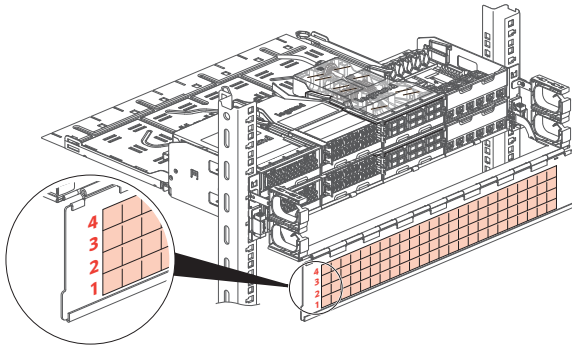
	<b>0 321 41</b>	Spliceable fibre optic cassette: takes any modular fibre optic block; supplied with 2 PG 11 cable glands
PG 11 x 2		
	Blocks for spliceable cassettes	
	<b>0 321 11</b>	HD SC duplex for 12 singlemode fibres
	<b>0 321 21</b>	HD SC duplex for 12 multimode fibres
	<b>0 321 10</b>	SC duplex for 6 singlemode fibres
	<b>0 321 12</b>	SC APC duplex for 6 singlemode fibres
	<b>0 321 20</b>	SC duplex for 6 multimode fibres
	<b>0 321 13</b>	LC duplex for 6 singlemode fibres
	<b>0 321 23</b>	LC duplex for 6 multimode fibres
	<b>0 321 36</b>	LC duplex for 6 multimode fibres (aqua)
	<b>0 321 14</b>	LC duplex for 12 singlemode fibres
	<b>0 321 16</b>	LC APC duplex for 12 singlemode fibres
	<b>0 321 24</b>	LC duplex for 12 multimode fibres
	<b>0 321 37</b>	LC duplex for 12 multimode fibres (aqua)
	<b>0 321 15</b>	HD LC duplex for 24 singlemode fibres
	<b>0 321 25</b>	HD LC duplex for 24 multimode fibres
	<b>0 321 17</b>	ST for 6 singlemode fibres
	<b>0 321 27</b>	ST for 6 multimode fibres
	<b>0 321 33</b>	4 adapter, feedthrough, singlemode MTPs
	<b>0 321 34</b>	4 adapter, feedthrough, multimode MTPs
	<b>0 321 18</b>	8 adapter, feedthrough, multimode MTPs
<b>0 321 19</b>	8 adapter, feedthrough, singlemode MTPs	
"Made-to-order"	OM5 or other colours	

	<b>0 337 55</b>	Copper cassette to be equipped with up to 6 RJ45 Cat. 5e, Cat. 6 and Cat. 6A connectors
	<b>0 337 95</b>	High Density copper cassette to be equipped with up to 12 RJ45 Cat. 5e, Cat. 6 and Cat. 6A connectors
	<b>0 337 53</b>	Cat. 5e
	<b>0 337 63</b>	Cat. 6
	<b>0 337 73</b>	Cat. 6A
	<b>0 337 54</b>	Cat. 5e
	<b>0 337 64</b>	Cat. 6
	<b>0 337 65</b>	Cat. 6
	<b>0 337 75</b>	Cat. 6A
	<b>*0 337 85</b>	Cat. 8 *only for Cat. No. 0 337 55

### 3. PANEL TECHNICAL CHARACTERISTICS

#### High density panel characteristics:

Can take spliceable, preterminated or copper cassettes.  
2U/4U front door with integral marking.



#### 1U panel (Cat. No. 0 321 75)

##### Maximum capacity:

- 48 SC connectors
- 24 ST connectors
- 96 LC connectors

#### 2U panel (Cat. No. 0 321 76)

##### Maximum capacity:

- 96 SC connectors
- 48 ST connectors
- 192 LC connectors

#### 4U panel (Cat. No. 0 321 77)

##### Maximum capacity:








- 192 SC connectors
- 96 ST connectors
- 384 LC connectors

#### Material characteristics

Material: steel  
Surface treatment: zinc plating  
Rear door and cable management: black paint  
Halogen-free  
IK 05

Storage and operating temperature: -30°C to +60°C

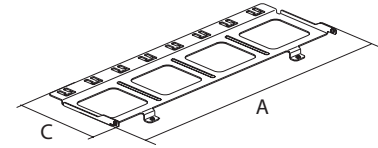
### 4. PANEL ACCESSORIES

 x 4 <b>0 321 26</b>	 <b>0 321 05</b>	 <b>0 321 22</b>	 <b>0 321 28</b>
Compatible with all fibre optic cassettes and holders	Only for Cat. Nos. 0 321 76/77		
 M3 x 4 <b>0 321 46</b>	 M3 x 4 <b>0 321 78</b>	 <b>0 337 57</b>	
Only for Cat. No. 0 321 75		Only for Cat. Nos. 0 321 75/76/77	

#### • 4.1 Rear cable management accessory

##### Cat. No. 0 321 46

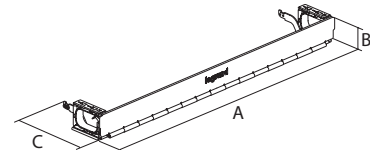
Mounted on panel Cat. No. 0 321 75 for rear cable management and attachment.



#### • 4.2 Front cable management

##### Cat. No. 0 321 78


Mounted on 1U panel Cat. No. 0 321 75, 2 side and front door cord guides with integral marking for tidy cord storage on the front panel and sides.



#### • 4.3 Cord holder accessory

##### Cat. No. 0 321 26

Supplied in packs of 4, these are mounted on fibre optic cassettes and the slim cassette holder (Cat. No. 0 321 38) for tidy cord storage on the front panel.



#### • 4.4 Dimensions (mm)

Cat. Nos.	A	B	C
0 321 46	443	23.5	147
0 321 78	489.5	44	98
0 321 26	106	11	88

#### • 4.5 Blanking cassette

##### Cat. No. 0 337 57

Mounted on panel Cat. Nos. 0 321 75/76/77

#### • 4.6 Cable gland accessory

##### Cat. No. 0 321 05

Mounted at the rear of panel Cat. Nos. 0 321 76/77, compatible with PG9 and PG13.5

#### • 4.7 Copper cable guide accessory

##### Cat. No. 0 321 22

Mounted at the rear of panel Cat. Nos. 0 321 76/77, takes up to 12 copper cables

#### • 4.8 Fan-out accessory

##### Cat. No. 0 321 28

Clips onto the rear of the panel Cat. Nos. 0 321 76/77  
For fixing Legrand preterminated links equipped with a fan-out

#### • 4.9 Approximate weight of accessories (g)

Cat. Nos.	Weight (g)
0 321 05	20
0 321 22	20
0 321 26	15
0 321 28	20
0 321 46	410
0 321 78	515
0 337 57	40