


# Data Sheet

## CALLA LED Step Lights 2.4W, IP65 ZINNIA LED Starlights 2.4W, IP65

CAT NO. LST013KWE, LST013KPS, LST023KWE, LST023KPS

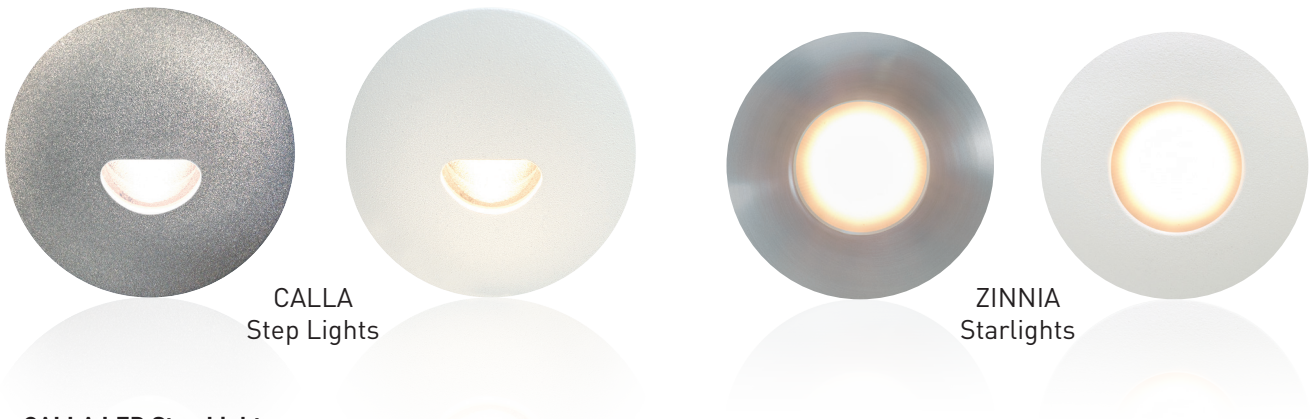

CALLA  
Step Lights

ZINNIA  
Starlights

### CALLA LED Step Lights

| Cat no.   | Description                           | Wattage | Ceiling Cut-out | Recessed Depth | Fascia Diameter | Lumens | Colour Temp | IP Rating |
|-----------|---------------------------------------|---------|-----------------|----------------|-----------------|--------|-------------|-----------|
| LST013KWE | White Step Light 2.4W Warm White LED  | 2.4W    | 45mm            | 42mm           | 54mm            | 24lm   | 3000K       | IP65      |
| LST013KPS | Silver Step Light 2.4W Warm White LED | 2.4W    | 45mm            | 42mm           | 54mm            | 24lm   | 3000K       | IP65      |

### ZINNIA LED Starlights


| Cat no.   | Description                          | Wattage | Ceiling Cut-out | Recessed Depth | Fascia Diameter | Lumens | Colour Temp | IP Rating |
|-----------|--------------------------------------|---------|-----------------|----------------|-----------------|--------|-------------|-----------|
| LST023KWE | White Starlight 2.4W Warm White LED  | 2.4W    | 32mm            | 35mm           | 37mm            | 95lm   | 3000K       | IP65      |
| LST023KPS | Silver Starlight 2.4W Warm White LED | 2.4W    | 32mm            | 35mm           | 37mm            | 95lm   | 3000K       | IP65      |

### LED Driver Kit for CALLA and ZINNIA

| Cat no.      | Description                   | Wattage | Dimensions       | IP Rating | Lights   |
|--------------|-------------------------------|---------|------------------|-----------|--|
| LDR02D700/18 | Driver Kit 18W CALLA & ZINNIA | 18W     | 130W x 30H x 43D | No        | Connect 2 to 6 CALLA or ZINNIA lights per driver |

# CALLA LED Step Lights 2.4W, IP65 ZINNIA LED Starlights 2.4W, IP65

CAT NO. LST013KWE, LST013KPS, LST023KWE, LST023KPS

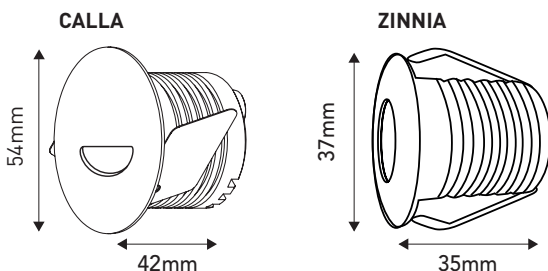

- Step Lights: Ideal for stairs and hallways
- Starlights: Ideal for illuminating features and create ambience
- Warm light (3000K)
- Step Light 24 lumens
- Starlight 95 lumens
- IP65 weatherproof
- Fully dimmable\*
- Low energy consumption – 2.4 Watts
- IC insulation rating: A type IC recessed luminaire can be installed with building material that can be exposed continuously to temperatures up to 90°C as such insulation can cover and abut the side of the luminaire.
- 6-year warranty
- Low profile/discreet design
- Up to 20 years life span
- Connect up to 6 units on one driver kit (Cat. No. LDR02D700/18) – driver kit not supplied with light fixtures, to be purchased separately.

## CALLA Step Lights

| Single product |                |                |        |
|----------------|----------------|----------------|--------|
| Cat No         | Single Barcode | Dimensions     | Weight |
| LST013KWE      | 9321001433002  | 66 x 67 x 55mm | 140g   |
| LST013KPS      | 9321001433019  | 66 x 67 x 55mm | 140g   |

| Outer box (Qty 100) |               |                   |        |
|---------------------|---------------|-------------------|--------|
| Cat No              | Barcode       | Dimensions        | Weight |
| LST013KWE           | 9321001433194 | 390 x 390 x 180mm | 10.1kg |
| LST013KPS           | 9321001433200 | 390 x 390 x 180mm | 10.1kg |

## ZINNIA Starlights

| Single product |                |                |        |
|----------------|----------------|----------------|--------|
| Cat No         | Single Barcode | Dimensions     | Weight |
| LST023KWE      | 9321001433026  | 61 x 52 x 52mm | 70g    |
| LST023KPS      | 9321001433033  | 61 x 52 x 52mm | 70g    |

| Outer box (Qty 100) |               |                   |        |
|---------------------|---------------|-------------------|--------|
| Cat No              | Barcode       | Dimensions        | Weight |
| LST023KWE           | 9321001433217 | 290 x 290 x 280mm | 9.6kg  |
| LST023KPS           | 9321001433224 | 290 x 290 x 280mm | 9.6kg  |

## Driver Kit (ordered separately)

|   |                      |  |
|---|----------------------|--|
| Cat no.<br><br>LDR02D700/18             | Plug, lead, driver   |  |
|   | Plug coupler (x 2)   |  |
|   | Socket coupler (x 2) |  |
|   | Jumper (x 1)         |  |
|   | Hub (x 3)            |  |
| Customer supplied cabling (if required) |                      |  |

**IMPORTANT:** A minimum of 2 Step Lights or Starlights must be connected with each driver. Step Lights and Starlights must be connected in series.

\* Minimum load applies on some HPM and Legrand dimmers.

HPM Legrand - AUS  
1300 369 777  
www.hpm.com.au  
ABN 31 000 102 661

HPM Legrand - NZ  
0800 476 009  
www.hpm.co.nz

Refer to your group buying office, HPM Legrand Sales Representative or HPM Legrand Sales Office for pricing.