
T5 SLIM SAVER

The first tool-less ballast and lamp batten that can help to reduce labour maintenance cost. Ideal for commercial, residential and industrial applications.





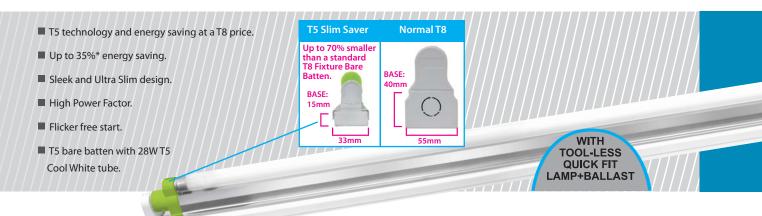


T5 linear 28W


MATERIALS/FINISH

Mildsteel housing Powder Coated Finish White colour


INSTALLATION/MOUNTING

Surface mount ceiling or wall





| TECHNICAL | |
|------------------------------------|--------------------|
| Wattage | 28W |
| Equivalent Wattage [#] | 36W |
| Designed to comply with | AS/NZS 60598 |
| Class rating | Class 1 electrical |
| IP | 23 |
| Operating range | 0°C to 40°C |
| PF | >0.9 |
| Input Voltage | 220V-240V~50Hz |



AVERAGE BEAM ANGLE (50%) : 262.1 DEG LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

| DIMENSIONS | | | |
|------------|--------|-------|--------|
| Product | Length | Width | Depth |
| M5F128US | 1230mm | 30mm | 54.5mm |

| SPECIFICATION GUIDE | | | |
|--|--|--------------|--|
| Product | Product Description | Lamp Wattage | |
| M5F128US | T5 bare batten with 28W T5 cool white tube | 1 x 28W | |
| Replacement unit is MT52T51X28 ballast | | | |

Replacement lamps are M5T28CC

*Up to 35% energy saving when compared with a standard 36W T8 Electromagnetic ballast type fluorescent fixture # Equivalent wattage is a guide only

> NOTE: All specifications correct at time of printing. Specifications are subject to change without notice.



Customer Service: 1300 369 777

A Group brand