



OPTIX RANGE DOWN LIGHT

European function and form.


- Soft lighting effect.
- Available in both fixed or gimble down light fixtures.
- Available in white powder coated finish and brush metal finish.
- Frosted glass diffuser.
- For extra Low Voltage use.

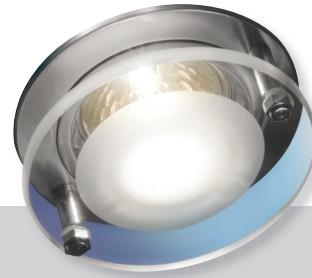

MALC317BCFG

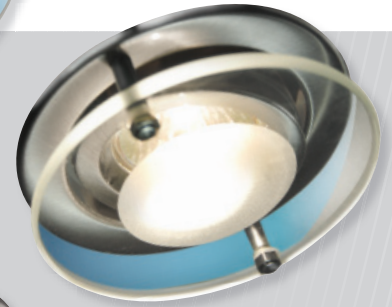

MALC515BCFG

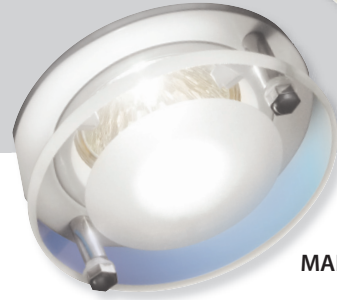

MALC317WHFG



MALC515WHFG



12V Dichroic 50W

MATERIALS/FINISH

Housing Painted Cast Alloy.

INSTALLATION/MOUNTING


Mounting Recessed standard ceiling types.

TECHNICAL

Designed to comply with	AS/NZS 60598
Class rating	⚡ Class 3 electrical - ELV

DIMENSIONS

Product	A	B	C	Cutout ø
MALC317	80	53	28.2	67
MALC515	99.5	59	28.2	89

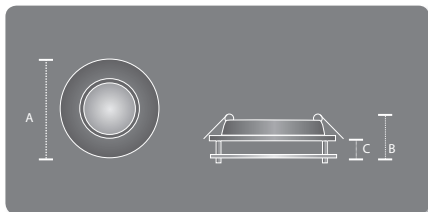

A= DIAMETER, B= OVERALL HEIGHT, C= HEIGHT BELOW CEILING
All measurements are in millimetres.

SPECIFICATION GUIDE

Product	Product Description	Lamp Wattage
MALC317BCFG	Brush metal finish, with frosted glass diffuser (FIXED).	50W
MALC317WHFG	White powder coated finish, with frosted glass diffuser (FIXED).	50W
MALC515BCFG	Brush metal finish, with frosted glass diffuser (GIMBLE).	50W
MALC515WHFG	White powder coated finish, with frosted glass diffuser (GIMBLE).	50W

*Lamp not included.

NOTE: All specifications correct at time of printing.
Specifications are subject to change without notice.