



RECESSED COVERED DOWNLIGHT
MODELS: MALC317WHMCK, MALC515WHMCK
MGU317WHMCK, MGU515WHMCK

Please read these instructions carefully before installation and retain for future reference.

Note:
 These products have been tested successfully to AS/NZS60598.2.2:2001 and complies with Wiring Rules AS/NZS3000:2007, Recessed luminaires, clause 4.5.2.3 method (b).

These products are to be installed by a qualified licensed electrician.
 Locate the covered downlight and any transformers in a well ventilated area.
 All wiring must be installed to AS/NZS 3000:2007.

CAUTION:
DO NOT use dichroic lamps. Use only reflector type lamps.

Adhere to the clearance distances indicated in these instructions.

The cover will get hot. Please allow to cool before touching or adjusting.

Care must be taken that any insulation that is installed is flameproof. Always check the insulation manufacturer's specifications.

NOTE: any low voltage transformer required for installation must be located 30mm away from cover edge, 100mm from cover top AND not enclosed by any insulation material.

Location of downlight cover.

This product is to be mounted in a well ventilated area free from loose material.

DO NOT cover this downlight cover with insulating matting or similar material under any circumstances




The covered downlight must be kept at least at a safe distance from any flammable material such as timber rafters, battens and joists. (see instruction for distances).

Matted/blanketed insulation (eg: Pink Batts) may be installed as shown while loose pumped material (eg:


Cellulose Fibre) must be restrained from by a suitable barrier.

Distance from cover to surrounding timber A = 30mm


Distance from top of cover to timber beams B = 100mm

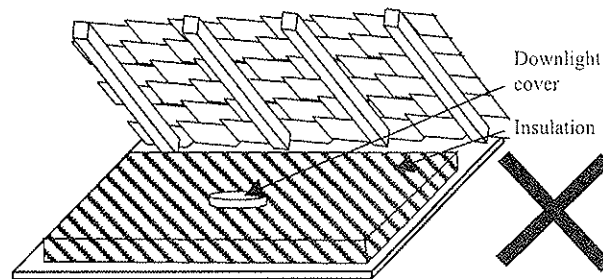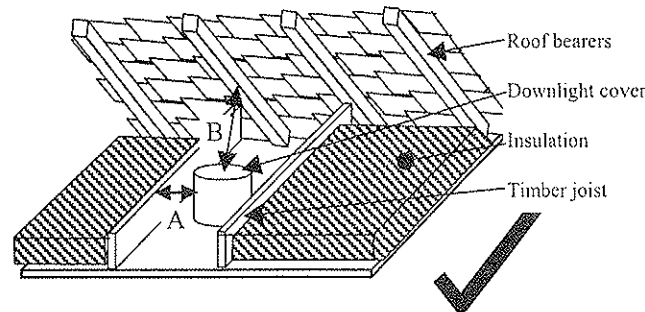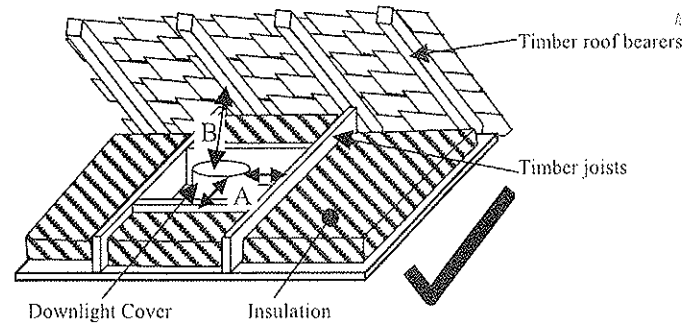

DO NOT INSTALL INSULATION AGAINST COVER

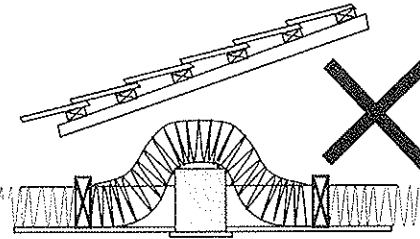

DO NOT
ENCLOSE
DOWNLIGHT
COVER WITH
ANY MATERIAL

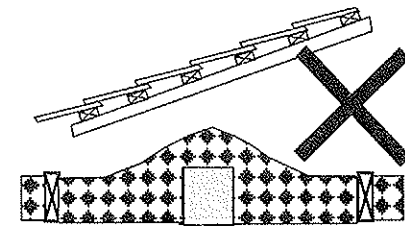

DO NOT ALLOW
LOOSE
INSULATION
MATERIAL TO
COME IN
CONTACT WITH
COVER SURFACE

WARRANTY

HPM Legrand guarantees this product against defects of material and workmanship for a period of 12 months from the date of purchase provided that the product is used in accordance with NELSON'S instructions. Please retain your purchase receipt for all warranty claims.

Legrand Australia Pty Ltd
 ACN 000 102 661