

T5 LOW PROFILE SLIM-LINE SURFACE MOUNT FIXTURE

A striking Slim-line Fixture featuring exceptional efficiency and low maintenance requirements.

- Slim modern interior ceiling oyster.
- Highly Efficient Energy Saver.
- Three sizes to suit application and decor.
- Flicker Free - Instant starter.
- Latest Technology Electronic Ballast.



Photo courtesy of Beca Carter



T5 circular 22W, 32W, 40W

MATERIALS/FINISH

Body Pressed sheet steel painted white.
Diffuser Opal soft-form acrylic.


INSTALLATION/MOUNTING

Usage Wall or ceiling.
Installation 2-point keyhole attachment.

TECHNICAL	
Designed to comply with	AS/NZS 60598
Class rating	⊕ Class 1 electrical
IP	20
Operation range	-10°C to +50°C
PF	>0.60
Input Voltage	220V-240V~50Hz

LAMP OUTPUT ESTIMATOR	
T5 22W	100W Incandescent
T5 32W	150W Incandescent
T5 40W	200W Incandescent

DIMENSIONS			
Product	A	B (DIFFUSER)	C
MRT5YA22	265	295	100
MRT5YA32	280	340	100
MRT5YA40	340	395	100

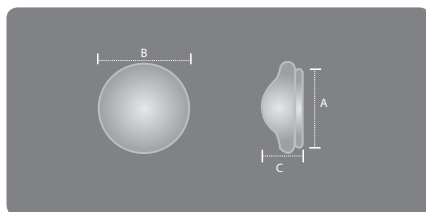

A= BASE WIDTH, B= WIDTH, C= HEIGHT
All measurements are in millimetres.

SPECIFICATION GUIDE		
Product	Product Description	Lamp Wattage
MRT5YA22	*T5 22w Circular Slim-line Oyster.	22W
MRT5YA32	*T5 32w Circular Slim-line Oyster.	32W
MRT5YA40	*T5 40w Circular Slim-line Oyster.	40W

*Supplied complete with T5 Fluorescent lamp.

NOTE: All specifications correct at time of printing.
Specifications are subject to change without notice.