




Data Sheet

LED Satellite surface mount DALI Emergency

CAT NO. 684853/D, 684854/D



Specifications		
Cat No	684853/D	684854/D
Description	Satellite LED 1x02W Flex and Plug DALI	Satellite LED 1x02W Flex and Plug Black DALI
Lamp	1x2W LED	
Battery pack	NiMH 1 x 5 C cells linear – 6.0Vdc 4Ah	
Operating Voltage	240V a.c. +/- 6% 50Hz	
Power Consumption	3.3W hrc/ 1.1W lrc	
Body Constructions	Polycarbonate (satellite head), steel (enclosure)	
Operating Temperature	10° to 40°	
Lighting Classification	C ₀ /C ₉₀ D50/D50	
IP Rating	IP20	
Compliance	IEC 62385 AS/NZS 2293 AS/NZS 60598   	

*hrc- high rate charge, lrc- low rate charge



LED Satellite surface mount DALI Emergency

CAT NO. 684853/D, 684854/D



- Suitable for all emergency lighting applications
- Easy to install
- Suitable for surface mounting
- One high Brightness LED
- D50 Classification
- DALI monitored
- Also available in black
- Manufactured in Australia

Dimensions

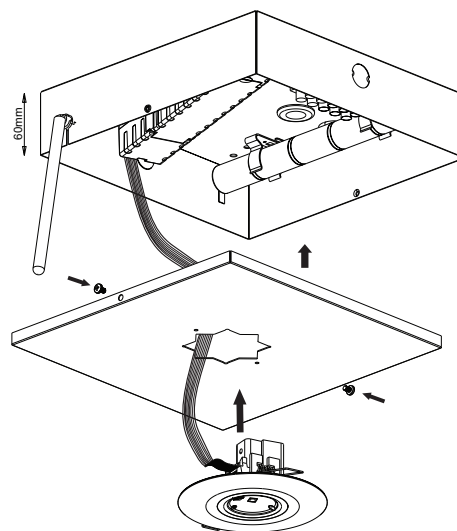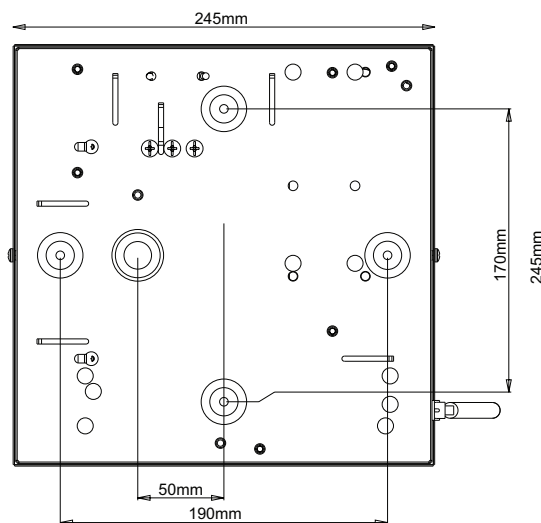

Legrand - Australia
1300 369 777
www.legrand.com.au
ABN 31 000 102 661

Legrand - New Zealand
0800 476 009
www.legrand.co.nz

Refer to your group buying office, Legrand Sales Representative or
Legrand Sales Office for pricing.

Please note: specifications are subject to change without prior notice.