

Datasheet

WP2 LED Weatherproof Batten IP65 - DALI Emergency



CAT. NO. 685050/D, 685080/D



685050/D



685080/D

Cat. No.		685050/D	685080/D
Description		WP2L6 LED BATTEN 4K MTD	WP2L12 LED BATTEN 4K MTD
Operation Mode		Switched Maintained	
Classification C0/C90		C0: D100, C90: C80	C0: D125, C90: C100
Battery		NiMH 6V 4Ah	
Length (mm)		671	1273
Weight (kg)		2.7	4.8
Light source		LED (4000K)	
Luminous flux (lm)	Mains mode	2300	3000
	Emergency mode	580	660
Power (W)	Mains only	24	29
	Emergency pack (High rate charge)	4.8	4.8
	Emergency pack (Low rate charge)	2.5	2.5
Luminaire efficiency in low rate charge (lm/W)		83	95
Power factor		0.89	0.85
Inrush current		27A	47A
Supply voltage		230 - 240V a.c 50Hz	
Ballast type		DALI Dimmable	
IP rating		IP65	
IK rating		IK09	
Retaining clips		316 Stainless Steel	
Body construction		Moulded glass reinforced polyester (GRP)	
Diffuser		Clear reeded polycarbonate	
Gasket		Silicone	
Geartray		High reflective white powder coated mild steel	
Compliance		IEC 62385, AS/NZS 60598	
Product Marking			

WP2 LED Weatherproof Batten IP65 - DALI Emergency


CAT. NO. 685050/D, 685080/D



FEATURES

- A premium range of LED weatherproof battens.
- Available in 2 foot or 4 foot lengths.
- Maintained emergency.
- Two lumen packages: 2200lm or 3900lm, 4000K colour temperature.
- Ideal replacement for T5 equivalents.
- Dedicated LED engine for maximum spacings.
- LED Light source life:
 - 50,000hrs, L80 B50 at ambient temperature of 25°C.
 - 50,000hrs, L70 B50 at ambient temperature of 40°C.
- CRI > 80
- 1 Year warranty.
- Designed and Manufactured in Australia.

DIMENSIONS

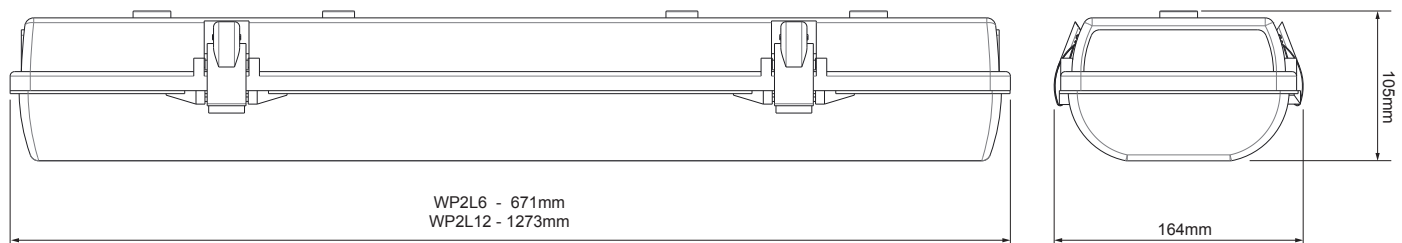

Legrand Australia
1300 369 777
www.legrand.com.au
ABN 31 000 102 661

Legrand New Zealand
0800 476 009
www.legrand.co.nz

Refer to your group buying office, Legrand Sales Representative or Legrand Sales Office for pricing.

Please note: specifications are subject to change without prior notice.