



Arteor^M Mirror and Brushed metal plates for British Standard


Cat. No(s): 5 713 41/42/43/44/45/46/47/48/49/50/51/52/53/54/55/56/57/58/59/60
5 716 26/27/28/29/30/31/32/33 - 5 750 73/74/76/83/84/86/93/94/96
5 751 04/03/06/23/24/26/63/64/66 - 5 752 03/04/06/13/14/16 - 5 753 73/74/76
5 755 43/44/46/53/54/56/63/64/66 - 5 756 13/14/16
5 761 00/10/20/40/50/60/70/80/90 - 5 762 00/10 - 5 763 70 - 5 767 03/04/06/10/43/44



5 75214



5 756 14



5 750 74

1. USE

Finishing plates.

The plates clip into notches on screw and/or claw fixings.

Protection film must be removed only once site work is fully completed.

2. RANGE

Plates (square version)	Mirror		Brushed metal			
	Mirror White	Mirror Black	Stainless Steel	Gold Brass	Pink Champagne	Black
1 module	5 752 04	5 752 03	5 752 06	5 761 00	5 713 51	5 713 41
2 modules	5 752 14	5 752 13	5 752 16	5 761 20	5 713 52	5 713 42
3 modules - 1 gang	5 751 64	5 751 63	5 751 66	5 761 80	5 713 53	5 713 43
3 modules and shaver sockets	5 750 74	5 750 73	5 750 76	5 761 60	5 713 55	5 713 45
4 modules	5 750 84	5 750 83	5 750 86	5 761 40	5 713 54	5 713 44
6 modules - supplied with support frame	5 753 74	5 753 73	5 753 76	5 763 70	5 713 56	5 713 46
8 modules - supplied with support frame	5 767 04	5 767 03	5 767 06	5 767 10	5 713 58	5 713 48
For 5 A/13 A switched socket outlet - 1 gang	5 750 94	5 750 93	5 750 96	5 762 10	5 713 57	5 713 47
For 13 A twin switched socket outlet - 2 gang	5 751 04	5 751 03	5 751 06	5 762 00	5 713 59	5 713 49
For 13 A fused connection unit switched	5 751 24	5 751 23	5 751 26	5 761 90	5 713 60	5 713 50
Plates (round version)	Mirror White	Mirror Black	Stainless Steel	Gold Brass	Pink Champagne	Black
2 modules	5 756 14	5 756 13	5 756 16	5 761 10	5 716 30	5 716 26
3 modules	5 755 44	5 755 43	5 755 46	5 761 50	5 716 32	5 716 28
3 modules - 1 gang	5 755 64	5 755 63	5 755 66	5 761 70	5 716 33	5 716 29
4 modules	5 755 54	5 755 53	5 755 56	-	5 716 31	5 716 27
6 modules	5 767 44	5 767 43	-	-	-	-


Arteor^M

Mirror and Brushed metal plates

for British Standard

Cat. No(s): 5 713 41/42/43/44/45/46/47/48/49/50/51/52/53/54/55/56/57/58/59/60
 5 716 26/27/28/29/30/31/32/33 - 5 750 73/74/76/83/84/86/93/94/96
 5 751 04/03/06/23/24/26/63/64/66 - 5 752 03/04/06/13/14/16 - 5 753 73/74/76
 5 755 43/44/46/53/54/56/63/64/66 - 5 756 13/14/16
 5 761 00/10/20/40/50/60/70/80/90 - 5 762 00/10 - 5 763 70 - 5 767 03/04/06/10/43/44

3. DIMENSIONS (mm) (continued)

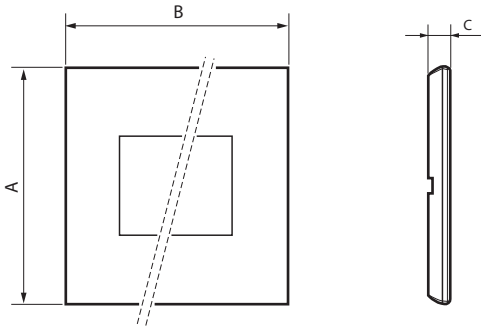

Plates (square version)	A	B	C
1 module	92	92	8
2 modules	92	92	8
3 modules - 1 gang	92	92	8
3 modules et shaver socket	92	157	8
4 modules	92	157	8
6 modules	92	237.5	8
8 modules	92	252.5	8
For 5 A/13 A switched socket outlet - 1 gang	92	92	8
For 13 A twin switched socket outlet - 2 gang	92	157	8
For 13 A fused connection unit switched	92	92	8
Plates (round version)	A	B	C
2 modules	92	92	8
3 modules	92	157	8
3 modules - 1 gang	92	92	8
4 modules	92	157	8
6 modules	92	237.5	8

60.3 mm fixing centres

4. TECHNICAL CHARACTERISTICS

4.1 Mechanical characteristics

Impact tests: IK 04

4.2 Material characteristics

Plates: PC for Mirror White and Mirror Black

Plates: Metal for Stainless Steel, Gold Brass, Pink Champagne and Black

Subplate: PC

Surround: Chromed Zamac

Halogen-free

UV-resistant

Self-extinguishing: 650°C/30 s

4.3 Climate characteristics

Storage temperature: -10°C to +70°C

Usage temperature: -5°C to +50°C

5. CLEANING

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene.

Resistance to cleaning products:

Hexane (EN60669-1), alcool à brûler, methylated spirits, soapy water, diluted ammoniac, pure bleach diluted to 10%, window cleaning-products, pre-impregnated wipes.

Resistance to hospital-grade cleaning products:

Anios, surfanlos, bactylisine, diluted hydrogen peroxyde (35%).

Caution: Always test before using other special cleaning products.

Do not paint the plates.

6. STANDARDS AND APPROVALS

Compliant with installation and manufacturing standards.

See e. catalogue.