



# Arteor<sup>M</sup>

## German and French Standards plates


Cat. No(s): 5 714 13/14/15/33/34/35/43/44/45  
 5 715 61/62/63/64/65/75/81/82/83/84/85/91/92/93/94/95 - 5 716 58/59/60/61/62/63  
 5 750 10/12/17/20/22/27/30/32/37/40/42/47/50/52/57/60/62  
 5 755 10/12/20/22 - 5 756 00/02 - 5 765 40/47/52/60/62/67



5 715 81



5 715 82



5 714 34

### 1. USE

Finishing plates.


The plates clip into notches on screw and/or claw fixings.

Protection film must be removed only once site work is fully completed.

### 2. RANGE

Plates (square version)	White	Soft Alu	Graphite	Magnesium	Champagne	Dark Bronze
1 module	5 765 40	5 715 61	5 765 52	5 765 47	5 715 81	5 715 91
2 modules	5 765 60	5 715 62	5 765 62	5 765 67	5 715 82	5 715 92
3 modules	5 750 10	5 714 13	5 750 12	5 750 17	5 714 33	5 714 43
2 x 2 modules	5 750 20	5 715 63	5 750 22	5 750 27	5 715 83	5 715 93
6 modules	5 750 40	5 714 15	5 750 42	5 750 47	5 714 35	5 714 45
2 x 6 modules	5 750 60	5 715 65	5 750 62	5 715 75	5 715 85	5 715 95
4 modules	5 750 30	5 714 14	5 750 32	5 750 37	5 714 34	5 714 44
3 x 2 modules	5 750 50	5 715 64	5 750 52	5 750 57	5 715 84	5 715 94
Plates (round version)	White	Soft Alu	Graphite	Magnesium	Champagne	Dark Bronze
2 x 1 module	5 756 00	5 716 58	5 756 02	5 716 61	-	-
2 x 2 modules	5 755 10	5 716 59	5 755 12	5 716 62	-	-
3 x 2 modules	5 755 20	5 716 60	5 755 22	5 716 63	-	-

### 3. DIMENSIONS (mm)

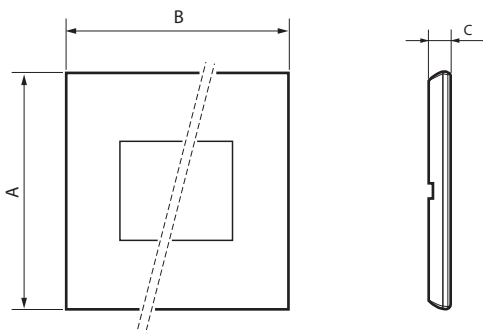

Plates (square version)	A	B	C
1 module	92	92	8
2 modules	92	92	8
3 modules	92	127	8
2 x 2 modules	92	157	8
6 modules	92	237.5	8
2 x 6 modules	178	237.5	8
4 modules	92	157	8
3 x 2 modules	92	237.5	8
Plates (round version)	A	B	C
2 x 1 module	92	157	8
2 x 2 modules	92	157	8
3 x 2 modules	92	237.5	8

#### 4. TECHNICAL CHARACTERISTICS

##### ■ 4.1 Mechanical characteristics

Impact tests: IK 04

##### ■ 4.2 Material characteristics

Plate: PC

Subplate: PC

Halogen-free

UV-resistant

Self-extinguishing: 650°C/30 s

##### ■ 4.3 Climate characteristics

Storage temperature: -10°C to +70°C

Usage temperature: -5°C to +50°C

#### 5. CLEANING

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene.

##### **Resistance to cleaning products:**

Hexane (EN60669-1), alcool à brûler, methylated spirits, soapy water, diluted ammoniq, pure bleach diluted to 10%, window cleaning-products, pre-impregnated wipes.

##### **Resistance to hospital-grade cleaning products:**

Anios, surfanlos, bactylisine, diluted hydrogen peroxyde (35%).

**Caution:** Always test before using other special cleaning products.

Do not paint the plates.

#### 6. STANDARDS AND APPROVALS

Compliant with installation and manufacturing standards.

See e. catalogue.