



Arteor^M Reflective, Wood and Signature plates for British Standard


Cat. No(s): 5 713 61/62/63/64/65/66/67/68/69/70/71/72/73/74/75/76/77/78/79
 5 713 80/81/82/83/84/85/86/87/88/89/90/91/92/93/94/95/96/97/98/99
 5 714 01/02/03/04/05/06/07/08/09



5 713 62



5 713 61



5 713 65

1. USE

Finishing plates.


The plates clip into notches on screw and/or claw fixings.

Protection film must be removed only once site work is fully completed.

2. RANGE

| Plates (square version) | Reflective | | | Wood | Signature |
|---|-----------------|----------|----------|----------|-----------|
| | Stainless Steel | Black | Gold | Grey Oak | Cube |
| 1 module | 5 713 61 | 5 713 81 | 5 713 71 | 5 713 91 | 5 714 01 |
| 2 modules | 5 713 62 | 5 713 82 | 5 713 72 | 5 713 92 | 5 714 02 |
| 3 modules - 1 gang | 5 713 63 | 5 713 83 | 5 713 73 | 5 713 93 | 5 714 03 |
| 3 modules and shaver sockets | 5 713 65 | 5 713 85 | 5 713 75 | 5 713 95 | 5 714 05 |
| 4 modules | 5 713 64 | 5 713 84 | 5 713 74 | 5 713 94 | 5 714 04 |
| 6 modules - supplied with support frame | 5 713 66 | 5 713 86 | 5 713 76 | 5 713 96 | 5 714 06 |
| 8 modules - supplied with support frame | 5 713 68 | 5 713 88 | 5 713 78 | 5 713 98 | 5 714 08 |
| For 5 A/13 A switched socket outlet - 1 gang | 5 713 67 | 5 713 87 | 5 713 77 | 5 713 97 | 5 714 07 |
| For 13 A twin switched socket outlet - 2 gang | 5 713 69 | 5 713 89 | 5 713 79 | 5 713 99 | 5 714 09 |
| For 13 A fused connection unit switched | 5 713 70 | 5 713 90 | 5 713 80 | - | - |

3. DIMENSIONS (mm) (continued)

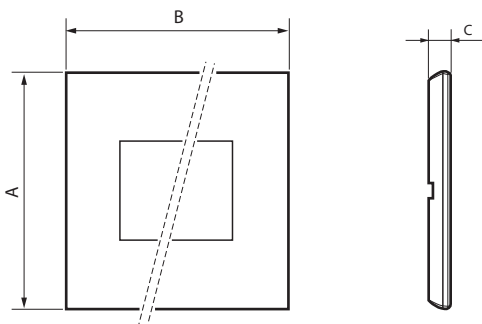

60.3 mm fixing centres

| Plates (square version) | A | B | C |
|---|----|-------|---|
| 1 module | 92 | 92 | 8 |
| 2 modules | 92 | 92 | 8 |
| 3 modules - 1 gang | 92 | 92 | 8 |
| 3 modules and shaver sockets | 92 | 157 | 8 |
| 4 modules | 92 | 157 | 8 |
| 6 modules | 92 | 237.5 | 8 |
| 8 modules | 92 | 252.5 | 8 |
| For 5 A/13 A switched socket outlet - 1 gang | 92 | 92 | 8 |
| For 13 A twin switched socket outlet - 2 gang | 92 | 157 | 8 |
| For 13 A fused connection unit switched | 92 | 92 | 8 |

4. TECHNICAL CHARACTERISTICS

■ 4.1 Mechanical characteristics

Impact tests: IK 04

■ 4.2 Material characteristics

Cube plates: PC

Stainless Style, Black and Gold plates: Metal

Grey Oak plates: Wood

Sub-plate: PC

Surround: Chromed Zamac

Halogen-free

UV-resistant

Self-extinguishing: 650°C/30 s

■ 4.3 Climate characteristics

Storage temperature: -10°C to +70°C

Usage temperature: -5°C to +50°C

5. CLEANING

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene.

Resistance to cleaning products:

Hexane (EN60669-1), alcool à brûler, methylated spirits, soapy water, diluted ammoniq, pure bleach diluted to 10%, window cleaning-products, pre-impregnated wipes.

Resistance to hospital-grade cleaning products:

Anios, surfanlos, bactylisine, diluted hydrogen peroxyde (35%).

Caution: Always test before using other special cleaning products.

Do not paint the plates.

6. STANDARDS AND APPROVALS

Compliant with installation and manufacturing standards.

See e. catalogue.