



# Datasheet

## Twin LED Spotlight

CAT. NO. 659065LI



|                           |   |
|---------------------------|---|
| Operating Mode            | Non-maintained  |
| Nominal Input Voltage     | 230 - 240 V a.c 50 Hz   |
| Battery                   | Li-ion 12.8 V 3.2 Ah  |
| Power Consumption         | 5 W   |
| Lumen Output              | 2 x 580 lm  |
| Inrush Current            | 5 A peak  |
| Light Source Life (LSL)   | 100,000 hrs   |
| Body Construction         | Polycarbonate body with twin LED heads made of Aluminum die-cast  |
| Operating Temperature     | 10° C to 40° C  |
| Ingress Protection Rating | IP65  |
| Impact Protection Rating  | IK07  |
| Product Weight            | 2.5 kgs   |
| Compliance                | AS/NZS 2293, AS/NZS 60598, AS CISPR 15  |
| Product Marking           |   R-NZ |



# Twin LED Spotlight




CAT. NO. 659065LI



## FEATURES

- Embedded Bluetooth for smart device connectivity.
- Low Power Wide Area Network type of communications utilising the LoRa platform.
- LoRa communication to maximise reliability, coverage and infiltration.
- LED Spotlight for non maintained emergency lighting applications.
- Ideal for commercial applications such as car parks and sports venues.
- Energy efficient LED lamp technology.
- iSmart™ temperature sensing technology for the Li-ion battery.
- Electronics designed to lengthen the life of the battery minimizing maintenance costs.
- Environment friendly battery.
- Easy to install.
- 5 year Warranty.
- Designed and Manufactured in Australia.

## DIMENSIONS

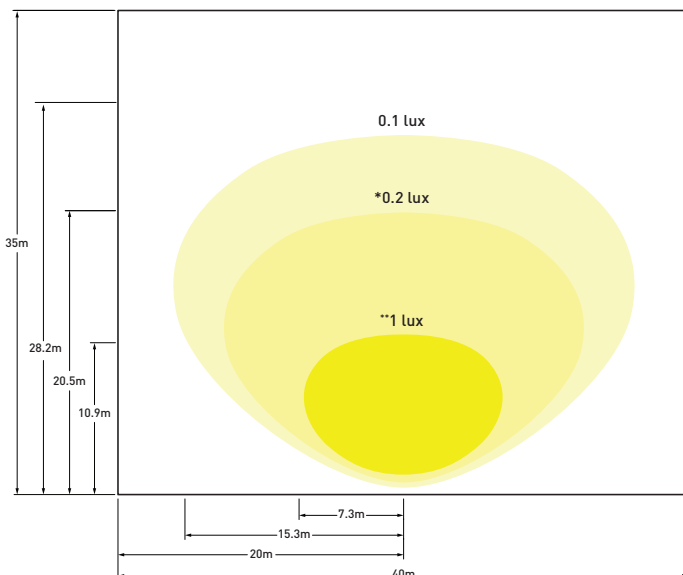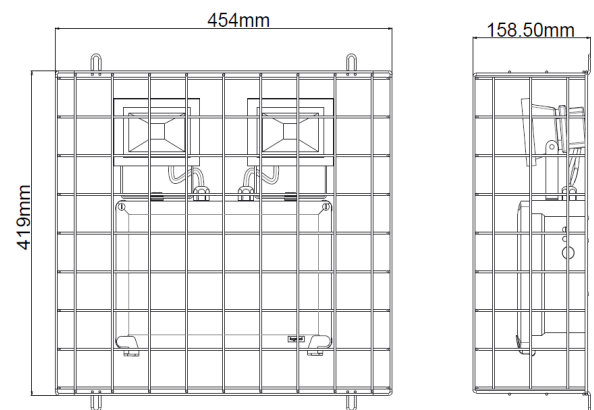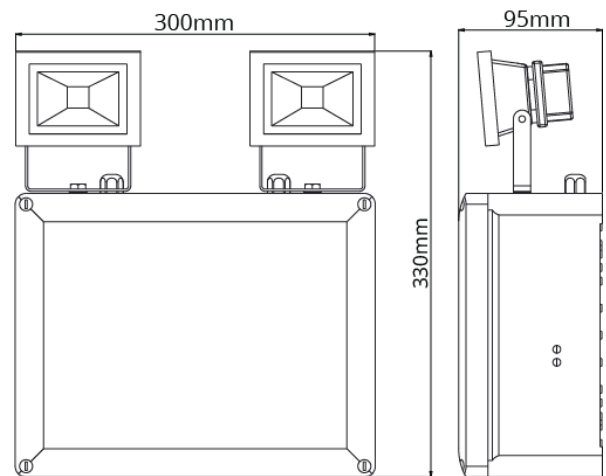

- Luminaire is mounted 5m above floor on one wall.
- Spotlights have a 90 degree tilt angle (straight out from fitting)
- A maintenance factor of 1.0 is applied to all luminaires.
- Illuminance measurements are at ground level.
- This design is to be used as a guide only and should not be used for compliance. A dedicated lighting design will need to be done for every application.

\*0.2 lux corresponding to Australian lighting standards.

\*\*1 lux corresponding to New Zealand lighting standards.

| Cat. No.  | Description                       |
|-----------|-----------------------------------|
| 659065LI  | Twin LED Spotlight, IP65 - Li-ion |
| Accessory |                                   |
| 682369    | Wire Guard - White                |

Legrand Australia  
1300 369 777  
www.legrand.com.au  
ABN 31 000 102 661

Legrand New Zealand  
0800 476 009  
www.legrand.co.nz

Refer to your group buying office, Legrand Sales Representative or Legrand Sales Office for pricing.

LEG21530

Please note: specifications are subject to change without prior notice.