


Datasheet

ARTEOR™ with NETATMO




Smart Dimmer Horizontal - 3 Gang

CAT. NO. **AWNHDM3WE**, **AWNHDM3MGN**, **AWNHDM3ALU**, **AWNHDM3CHP**

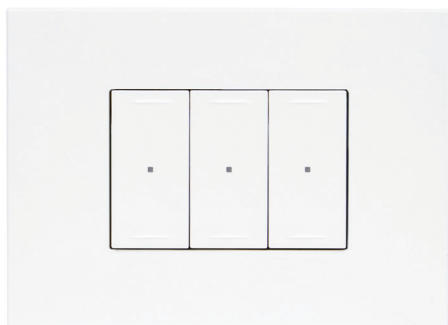


AWNHDM3WE

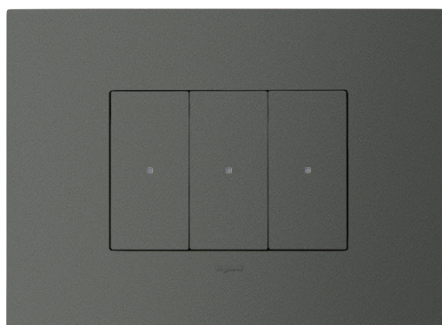

AWNHDM3MGN



AWNHDM3ALU

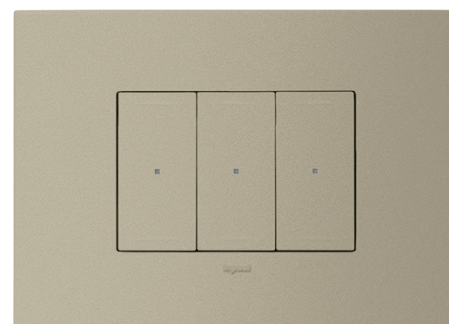

AWNHDM3CHP

Cat. No.	AWNHDM3WE	AWNHDM3MGN	AWNHDM3ALU	AWNHDM3CHP
Colour	White (WE)	Magnesium (MGN)	Aluminium (ALU)	Champagne (CHP)
Description	Smart Dimmer Horizontal 3 Gang, 3 Module, 3 Wire			
Nominal Input Voltage	230 - 240 V a.c. 50 Hz			
Max. Load	150 W			
No. of Gang	3 Gang			
Wired/Wireless	Wired			
IP Rating	IP2X			
Mounting Centre	84 mm			
Product Dimension (W X H X D)	127 X 92 X 42 mm			
Cut-out Dimensions (W X H)	96 x 56 mm			
Wireless Connectivity	Zigbee 2.4Ghz to 2.4835Ghz			
Compliance	AS/NZS 60669.2.1, ETSI EN 300 328, AS/NZS 4268			

Smart Dimmer Horizontal - 3 Gang











CAT. NO. AWNHDM3WE, AWNHDM3MGN, AWNHDM3ALU, AWNHDM3CHP

- Smart dimmer switch to expand an Arteur with Netatmo installation (requires installation of Starter kit or Basic kit).
- 3 ways to control for better user convenience: standard press on the dimmer switch, via smart devices or voice control.
- Compatibility with all 3 voice assistants: Apple SIRI, Google Home and Amazon Alexa.
- Energy consumption display to keep track of energy consumption.
- Push notifications to stay informed of home status.
- Arteur range: elegant design and stylish 17 coverplates finishes available.
- Supplied complete with support frame, coverplate, paint cover
- Easy to install.
- User-friendly app.

Single product		
Cat No.	Barcode	Dimensions
AWNHDM3WE	9321001490005	160 X 130 X 90mm
AWNHDM3MGN	9321001490043	
AWNHDM3ALU	9321001490081	
AWNHDM3CHP	9321001490128	

Outer Box (QTY 10)		
Cat No.	Barcode	Dimensions
AWNHDM3WE	9321001490166	368 X 185 X 391mm
AWNHDM3MGN	9321001490203	
AWNHDM3ALU	9321001490241	
AWNHDM3CHP	9321001490289	

Load Characteristics

 + 45° C + 5° C			LED 		
100 - 240 V AC 50/60 Hz	2 x 2.5 mm ²				
240 VAC	Max.	150 W	^(*) 150 W	150 W	150 W
100 VAC	Max.	75 W	^(*) 75 W	75 W	75 W

(*) For good light comfort, it is recommended to use bulbs of the same type and the same manufacturer.

With the dimmer option operating mode (which can be activated via the App), this switch functions only with dimmable bulbs (which can be identified by the logo on the packaging).

- Bench test prior to installation.