

Datasheet

ARTEOR™ with NETATMO




Smart Dimmer Horizontal - 2 Gang


CAT. NO. **AWNHDM2WE**, **AWNHDM2MGN**, **AWNHDM2ALU**, **AWNHDM2CHP**




AWNHDM2WE

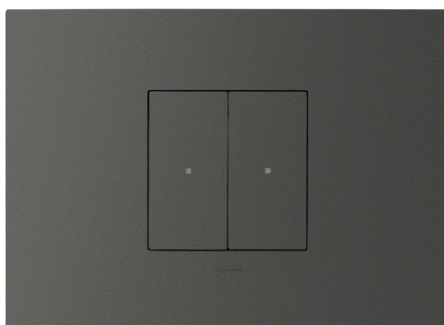

AWNHDM2MGN

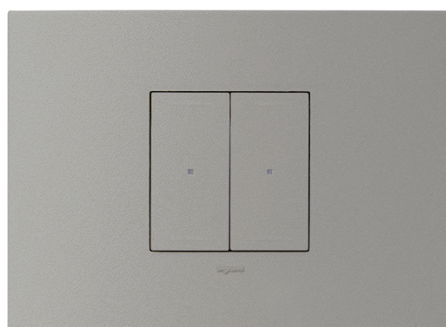

AWNHDM2ALU

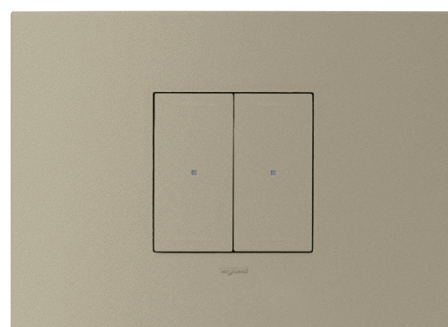

AWNHDM2CHP

| Cat. No. | AWNHDM2WE | AWNHDM2MGN | AWNHDM2ALU | AWNHDM2CHP |
|-------------------------------|--|-----------------|-----------------|-----------------|
| Colour | White (WE) | Magnesium (MGN) | Aluminium (ALU) | Champagne (CHP) |
| Description | Smart Dimmer Horizontal 2 Gang, 2 Module, 3 Wire | | | |
| Nominal Input Voltage | 230 - 240 V a.c. 50 Hz | | | |
| Max. Load | 150 W | | | |
| No. of Gang | 2 Gang | | | |
| Wired/Wireless | Wired | | | |
| IP Rating | IP2X | | | |
| Mounting Centre | 84 mm | | | |
| Product Dimension (W X H X D) | 127 X 92 X 42 mm | | | |
| Cut-out Dimensions (W X H) | 96 x 56 mm | | | |
| Wireless Connectivity | Zigbee 2.4Ghz to 2.4835Ghz | | | |
| Compliance | AS/NZS 60669.2.1, ETSI EN 300 328, AS/NZS 4268 | | | |

Smart Dimmer Horizontal - 2 Gang











CAT. NO. AWNHDM2WE, AWNHDM2MGN, AWNHDM2ALU, AWNHDM2CHP

- Smart dimmer switch to expand an Arteor with Netatmo installation (requires installation of Starter kit or Basic kit).
- 3 ways to control for better user convenience: standard press on the dimmer switch, via smart devices or voice control.
- Compatibility with all 3 voice assistants: Apple SIRI, Google Home and Amazon Alexa.
- Energy consumption display to keep track of energy consumption.
- Push notifications to stay informed of home status.
- Arteor range: elegant design and stylish 17 coverplates finishes available.
- Supplied complete with support frame, coverplate, paint cover
- Easy to install.
- User-friendly app.

| Single product | | |
|----------------|---------------|------------------|
| Cat No. | Barcode | Dimensions |
| AWNHDM2WE | 9321001489986 | 160 X 130 X 90mm |
| AWNHDM2MGN | 9321001490029 | |
| AWNHDM2ALU | 9321001490067 | |
| AWNHDM2CHP | 9321001490104 | |

| Outer Box (QTY 10) | | |
|--------------------|---------------|-------------------|
| Cat No. | Barcode | Dimensions |
| AWNHDM2WE | 9321001490142 | 368 X 185 X 391mm |
| AWNHDM2MGN | 9321001490180 | |
| AWNHDM2ALU | 9321001490227 | |
| AWNHDM2CHP | 9321001490265 | |

Load Characteristics

| | | | | | |
|---|---|---|--|---|---|
|  + 45° C + 5° C |  |  | LED  |  |  |
| 100 - 240 V AC 50/60 Hz | 2 x 2.5 mm ² |  |  |  |  |
| 240 VAC | Max. | 150 W | ^(*) 150 W | 150 W | 150 W |
| 100 VAC | Max. | 75 W | ^(*) 75 W | 75 W | 75 W |

(*) For good light comfort, it is recommended to use bulbs of the same type and the same manufacturer.

With the dimmer option operating mode (which can be activated via the App), this switch functions only with dimmable bulbs (which can be identified by the logo on the packaging).

- Bench test prior to installation.