

# Datasheet

ARTEOR™ with NETATMO




## Smart Dimmer Vertical – 2 Gang


CAT. NO. **AWNVDM2WE**, **AWNVDM2MGN**, **AWNVDM2ALU**, **AWNVDM2CHP**




AWNVDM2WE

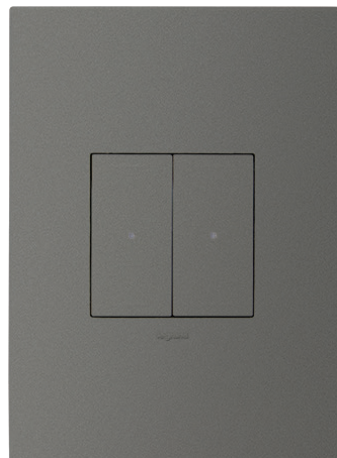

AWNVDM2MGN

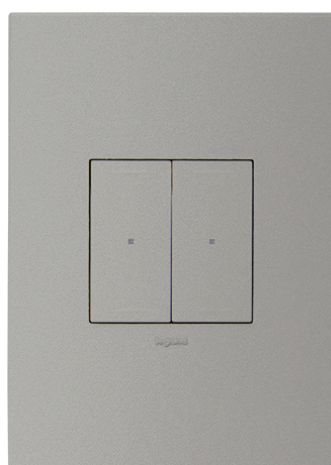

AWNVDM2ALU

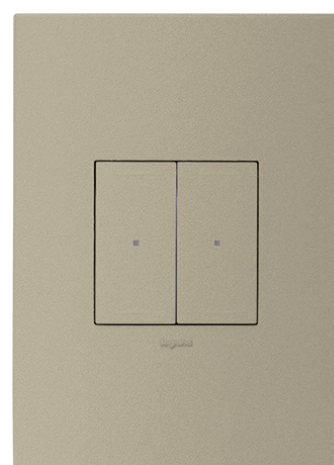

AWNVDM2CHP

Cat. No.	AWNVDM2WE	AWNVDM2MGN	AWNVDM2ALU	AWNVDM2CHP
Colour	White (WE)	Magnesium (MGN)	Aluminium (ALU)	Champagne (CHP)
Description	Smart Dimmer Vertical 2 Gang, 2 Module, 3 Wire			
Nominal Input Voltage	230 - 240 V a.c. 50 Hz			
Max. Load	150 W			
No. of Gang	2 Gang			
Wired/Wireless	Wired			
IP Rating	IP2X			
Mounting Centre	84 mm			
Product Dimension (W X H X D)	127 X 92 X 42 mm			
Cutout Dimensions (W X H)	56 x 96 mm			
Wireless Connectivity	Zigbee 2.4Ghz to 2.4835Ghz			
Compliance	AS/NZS 60669.2.1, ETSI EN 300 328, AS/NZS 4268			

## Smart Dimmer Vertical – 2 Gang

CAT. NO. AWNVDM2WE, AWNVDM2MGN, AWNVDM2ALU, AWNVDM2CHP

- Smart dimmer switch to expand an Arteur with Netatmo installation. (requires installation of Starter kit or Basic kit)
- 3 ways to control for better user convenience: standard press on the dimmer switch, via smart devices or voice control.
- Compatibility with all 3 voice assistants: Apple SIRI, Google Home and Amazon Alexa.
- Energy consumption display to keep track of energy consumption.
- Push notifications to stay informed of home status.
- Arteur range: elegant design and stylish 17 coverplates finishes available.
- Supplied complete with support frame, coverplate, paint cover, and load stabilising capacitor.
- Easy to install.
- User-friendly app.

Single product		
Cat No.	Barcode	Dimensions
AWNVDM2WE	9321001489993	160 X 130 X 90mm
AWNVDM2MGN	9321001490036	
AWNVDM2ALU	9321001490074	
AWNVDM2CHP	9321001490111	

Outer Box (QTY 10)		
Cat No.	Barcode	Dimensions
AWNVDM2WE	9321001490159	368 X 185 X 391mm
AWNVDM2MGN	9321001490197	
AWNVDM2ALU	9321001490234	
AWNVDM2CHP	9321001490272	

## Load Characteristics

Temperature + 45° C + 5° C	Wiring 2 x 2.5 mm <sup>2</sup>	Incandescent 150 W	LED 150 W	LED 75 W	LED 150 W
100 - 240 V AC 50/60 Hz	2 x 2.5 mm <sup>2</sup>	150 W	150 W	75 W	150 W
240 VAC	Max.	150 W	150 W	75 W	150 W
100 VAC	Max.	75 W	75 W	75 W	75 W

**(\*)** For good light comfort, it is recommended to use bulbs of the same type and the same manufacturer.

With the dimmer option operating mode (which can be activated via the App), this switch functions only with dimmable bulbs (which can be identified by the logo on the packaging).

- Bench test prior to installation.