


Datasheet

Freezer Weatherproof Exit - Galaxy

Cat No: 659084LI, 659085LI, 659086LI

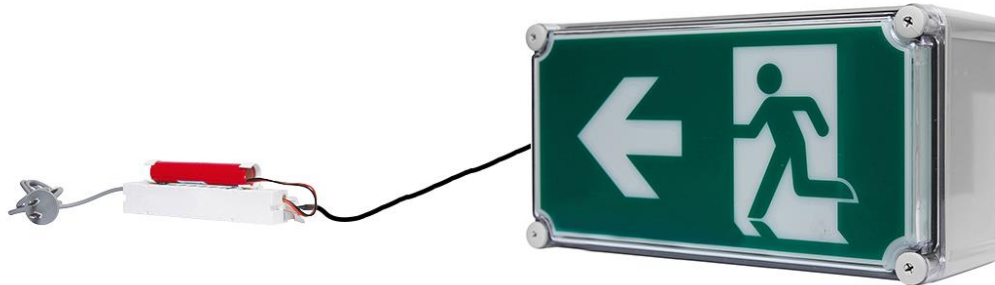

659085LI

Operation mode	Maintained
Voltage	230 – 240V a.c. 50Hz
Operating Temperature	10°C to 40°C (remote gear) -30°C to 40°C (exit sign)
Power Consumption	5.4W
Battery	Li-ion 6.4V 1.5Ah
Body construction	Polycarbonate
Diffuser	Polycarbonate
IP rating	IP65
Impact rating	IK08
Compliance	AS/NZS 60598, AS/NZS 2293



Datasheet



Freezer Weatherproof Exit - Galaxy

Cat No: 659084LI, 659085LI, 659086LI

- Freezer exit sign with remote gear for 24m viewing distance
- Embedded Bluetooth for smart device connectivity
- LoRa communication to maximise reliability, coverage and infiltration
- iSmart™ temperature sensing technology for the LIION battery
- Electronics designed to lengthen the life of the battery, minimising maintenance costs
- Environmentally friendly battery
- 5 year warranty
- Manufactured in Australia

Cat No	Description	Photometric Classification	
		C0	C90
24m Viewing			
659084LI	Freezer WP exit RM with 3m remote gear	E2.5	E2.0
659085LI	Freezer WP exit RML with 3m remote gear		
659086LI	Freezer WP exit RMR with 3m remote gear		
Accessories			
684690	Wall bracket for 24m exit		
684691	Side bracket for 24m exit		
684692	Ceiling bracket for 24m exit		

RM = Running man straight RML = Running man left RMR = Running man right

Spacing Table

Maximum spacing between luminaires 0.2 lux (Australia) as per AS/NZS 2293.1:2018

Mounting Height (m)	2.4	2.7	3.0	3.3
E2.0	5.2m	5.2m	5.2m	0.0m
E2.5	5.6m	5.8m	5.8m	5.8m

0.0m – can be used as a dual-purpose exit sign without a spacing as per clause 4.5 of AS/NZS2293.1:2018
For New Zealand, this exit sign is only classified as an internally illuminated exit sign


Datasheet




Freezer Weatherproof Exit - Galaxy

Cat No: 659084LI, 659085LI, 659086LI


Dimensions:

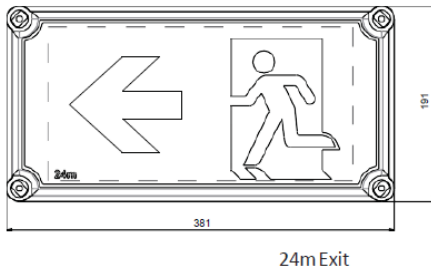

24m Exit




131

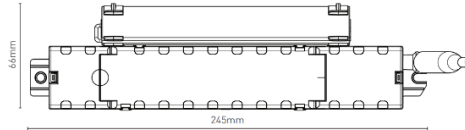

66mm

245mm





174mm

36mm

66mm

Remote gear with 3m cable


Rear mounting bracket

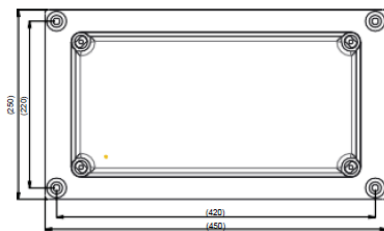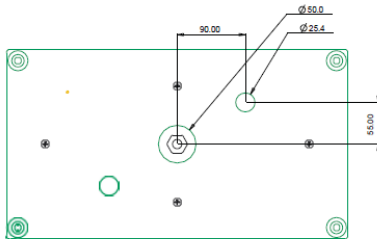


230

250

Side mounting bracket

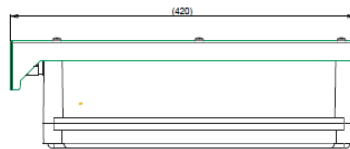

420



25.4

50.0


230

190

170

23


Ceiling mounting bracket

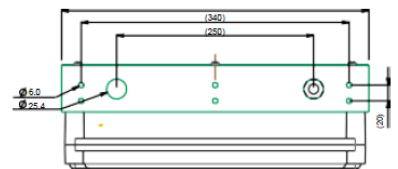




50.0

25.4

23



230

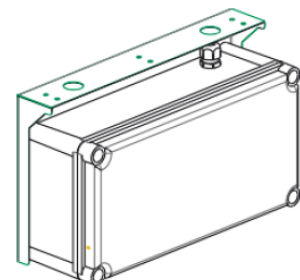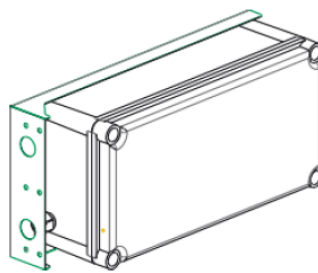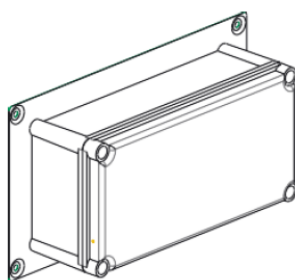

Legrand Australia
1300 369 777
www.legrand.com.au
ABN 31 000 102 661

Legrand New Zealand
0800 476 009
www.legrand.co.nz

Refer to your group buying office, Legrand Sales Representative or Legrand Sales Office for pricing.

Please note: specifications are subject to change without prior notice.