


Datasheet

Economy Weatherproof LED Batten- SPU version

CAT. NO. 659526LI, 659528LI, 659530LI



Cat. No.		659526LI	659528LI	659530LI
Description		L6 LED BATTEN	L12 LED BATTEN	L15 LED BATTEN
Supply voltage		230 - 240 V a.c. 50Hz		
Operation Mode		Switched Maintained		
Classification C ₀ /C ₉₀		C ₀ : D63, C ₉₀ : C125	C ₀ : D125, C ₉₀ : D80	C ₀ : D125, C ₉₀ : D80
Battery		Li-ion 12.8 V, 1.5 Ah	Li-ion 12.8 V, 1.5 Ah	
Light source		LED (4000 K)		
Chromaticity Tolerance		MacAdam Ellipse: 4 SDCM		
Luminous flux (lm)	Mains mode	2,100	4,600	5,700
	Emergency mode	470	900	
Power (W)	Mains only	23	49	56
	Emergency pack	3	3	3
	Total	26	52	59
Luminaire efficacy (lm/W)		81	88	97
Power factor		0.90	0.96	0.97
Inrush current		20 A	58 A	58 A
Driver type		Fixed output / Non-Dimmable		
IK rating		IK08		
IP rating		IP65		
Retaining clips		304 Stainless Steel		
Body construction		Polycarbonate		
Diffuser		Opal polycarbonate		
Length (mm)		664	1274	1574
Weight (kg)		1.8	2.9	3.4
Compliance		AS/NZS 2293, AS/NZS 60598		
Product Marking				

Economy Weatherproof LED Batten- SPU version


CAT. NO. 659526LI, 659528LI, 659530LI



FEATURES

- Available in 2 foot, 4 foot or 5 foot lengths.
- Three lumen packages: 2100lm, 4600lm or 5700lm, 4000K colour temperature.
- Switched maintained emergency.
- LED Light source life of 50,000hrs L70 at ambient temperature of 25°C.
- CRI > 80
- Large terminal block.
- Quarter turn gear tray fasteners for ease of maintenance.
- iSmart™ temperature sensing technology for the LIION battery.
- Electronics designed to lengthen the life of the battery.
- 5 Year Warranty.
- Manufactured in Australia.

DIMENSIONS

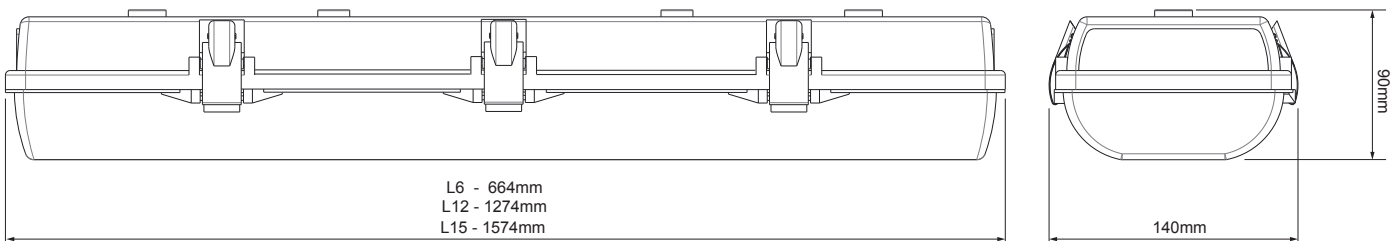

Legrand - Australia
1300 369 777
www.legrand.com.au
ABN 31 000 102 661

Legrand - New Zealand
0800 476 009
www.legrand.co.nz

Refer to your group buying office, Legrand Sales Representative or Legrand Sales Office for pricing.

Please Note: specifications are subjected to change without prior notice.

LE12196AC



05/2024