



Operating Mode	Non-Maintained
Nominal Input Voltage	230 - 240 V a.c. 50 Hz
Power Consumption	3 W
Inrush Current	4 A peak
Battery	Li-Ion 3.2 V - 6.6 Ah
Lumen Output	2 x 180 lm
Light Source Life (LSL)	50,000 hrs
Operating Temperature	10° C to 40° C
Body construction	Polycarbonate
Diffuser Construction	Polycarbonate
IP Rating	IP65
IK Rating	IK07
Product Weight	1.3 kg
Compliance	AS/NZS 2293, AS/NZS 60598
Product Marking	 

Economy LED Twinspot

CAT. NO. 659623LI





FEATURES

- Ideal for commercial applications such as car parks and sports venues.
- Energy efficient LED lamp technology.
- iSmart™ temperature sensing technology for the Li-ion battery.
- Electronics designed to lengthen the life of the battery, minimising maintenance costs.
- Environment friendly battery.
- Easy to install.
- 3 Year Warranty.
- Designed in Australia.

Cat .No	Description
659623LI	Eco LED Twinspot
Accessories	
682369	Wire Guard - White

DIMENSIONS

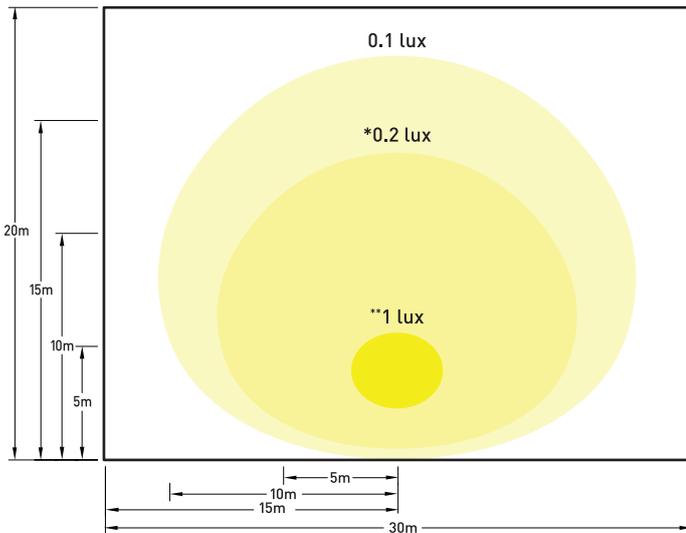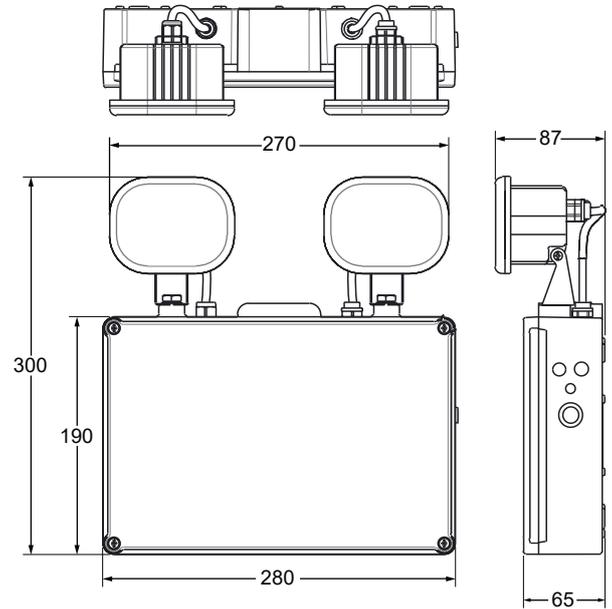

- Luminaire is mounted 5m above floor on one wall.
- Spotlights have a 90 degree tilt angle (straight out from fitting)
- A maintenance factor of 1.0 is applied to all luminaires.
- Illuminance measurements are at ground level.
- This design is to be used as a guide only and should not be used for compliance. A dedicated lighting design will need to be done for every application.

*0.2 lux corresponding to Australian lighting standards.

**1.0 lux corresponding to New Zealand lighting standards.

Note: All Dimensions are in mm.

Legrand Australia
1300 369 777
www.legrand.com.au
ABN 31 000 102 661

Legrand New Zealand
0800 476 009
www.legrand.co.nz

Refer to your group buying office, Legrand Sales Representative or Legrand Sales Office for pricing.

Please note: specifications are subject to change without prior notice.

