Datasheet

L¹ legrand[®]

WP3 LED Weatherproof Batten IP65 - Mains CAT. NO. 659300MA, 659301MA, 659303MA, 659304MA, 659306MA, 659307MA




Cat. No.		659300MA	659301MA	659303MA	659304MA	659306MA	659307MA	
Description		WP3 L6 LED BATTEN MAINS		WP3 L12 LED BATTEN MAINS		WP3 L15 LED BATTEN MAINS		
Supply Voltage		230-240 V a.c. 50 Hz						
Movement sensor for on/off operation		N/A	Microwave	N/A	Microwave	N/A	Microwave	
Light Source		Selectable LED (3000K/4000K/6500K)						
Chromaticity Tolerance		MacAdam Ellipse: 4 SDCM						
Luminous flux (lm) (Mains mode)	Warm	1900/2330/2750/3140		3480/4220/4430/5140		4450/5410/5690/6610		
	Cool	1940/2400/2850/3310		3560/4370/4580/5360		4540/5590/5910/6890		
	Natural	1960/2410/2850/3260		3600/4390/4600/5350		4580/5610/5920/6870		
Power consumption (W)		15/19/23/26		28/34/36/42		35/43/46/54		
Max. luminaire efficacy at 4000K		129		29			130	
Power factor		>0.8		>0.9				
Inrush Current		1	5A	20A				
IP Rating		IP65						
IK Rating		IK08						
Retaining clips		304 Stainless Steel						
Body construction		Polycarbonate						
Diffuser		Opal polycarbonate						
Length (mm)		664		1274		1574		
Weight (kg)		1.3		2.2		2.8		
Compliance		AS/NZS 60598, AS CISPR 15						
Product marking								


FEATURES

- A premium range of LED weatherproof battens.
- Available in 2 foot, 4 foot and 5 foot lengths.
- Tri-colour LED selection.
- Lumen select 4 brightness settings.
- Ideal replacement for T5 equivalents.
- DALI Lumen control & Motion dimming variant available as well.
- LED Light source life: 150,000hrs, L80 B50 at ambient temperature of 25°C.
 - 250,000hrs, L70 B50 at ambient temperature of 25°C.
- CRI > 90
- 5 Year warranty.

DIMENSIONS

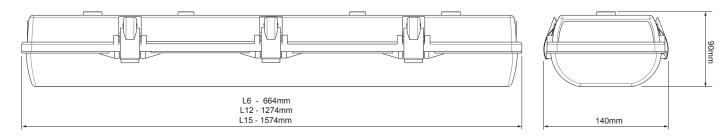

ON /OFF SENSOR OPERATION

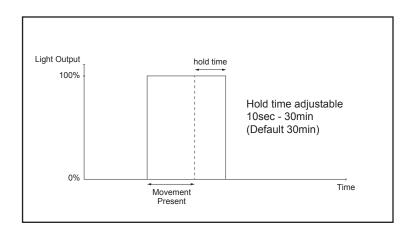

Legrand - Australia 1300 369 777 www.legrand.com.au ABN 31 000 102 661

Legrand - New Zealand 0800 476 009 www.legrand.co.nz Refer to your group buying office, Legrand Sales Representative or Legrand Sales Office for pricing.

Please note: specifications are subject to change without prior notice.

