


Datasheet

WP3 LED Weatherproof Batten IP65 – DALI Mains

CAT. NO. 659300DM, 659303DM, 659306DM



| Cat. No. | | 659300DM | 659303DM | 659306DM |
|------------------------------------|---------|--|----------------------------------|----------------------------------|
| Description | | WP3 L6 LED BATTEN DALI MAINS | WP3 L12 LED BATTEN DALI MAINS | WP3 L15 LED BATTEN DALI MAINS |
| Supply Voltage | | 230-240 V a.c. 50 Hz | | |
| Light Source | | Selectable LED (3000K/4000K/6500K) | | |
| Chromaticity Tolerance | | MacAdam Ellipse: 4 SDCM | | |
| Luminous flux (lm) (Mains mode) | Warm | 3140 | 5140 | 6610 |
| | Cool | 3310 | 5360 | 6890 |
| | Natural | 3260 | 5350 | 6870 |
| Power consumption (W) | | 26 | 42 | 54 |
| Luminaire efficacy at 4000K (lm/W) | | 127 | 128 | |
| Power factor | | >0.8 | >0.9 | |
| Inrush Current | | 13.6A | 35A | |
| IP Rating | | IP65 | | |
| IK Rating | | IK08 | | |
| Retaining clips | | 304 Stainless Steel | | |
| Body construction | | Polycarbonate | | |
| Diffuser | | Opal polycarbonate | | |
| Length (mm) | | 664 | 1274 | 1574 |
| Weight (kg) | | 1.3 | 2.2 | 2.8 |
| Compliance | | AS/NZS 60598, AS CISPR 15 | | |
| Product Marking | |  | | |

WP3 LED Weatherproof Batten IP65 – DALI Mains


CAT. NO. 659300DM, 659303DM, 659306DM



FEATURES

- A premium range of LED weatherproof battens.
- Available in 2 foot, 4 foot or 5 foot lengths.
- Tri-colour LED selection.
- Ideal replacement for T5 equivalents.
- LED Light source life: ■ 150,000hrs, L80 B50 at ambient temperature of 25°C.
■ 250,000hrs, L70 B50 at ambient temperature of 25°C.
- CRI > 90
- 5 Year Warranty.

DIMENSIONS

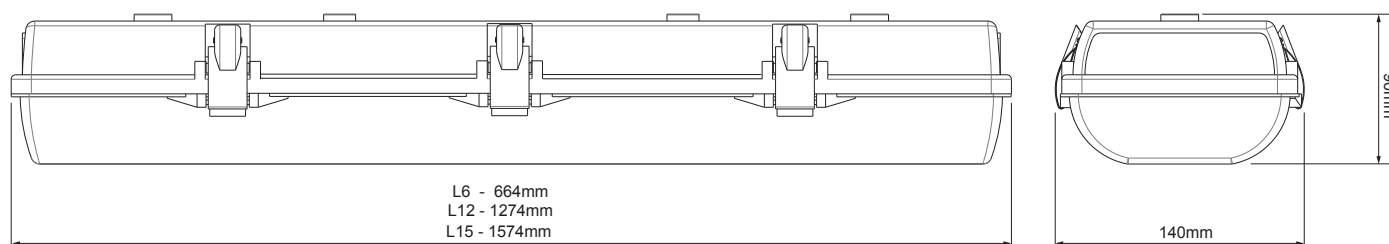

Legrand - Australia
1300 369 777
www.legrand.com.au
ABN 31 000 102 661

Legrand - New Zealand
0800 476 009
www.legrand.co.nz

Refer to your group buying office, Legrand Sales Representative or Legrand Sales Office for pricing.

Please note: specifications are subject to change without prior notice.



LE14655AB

10/2024