




Datasheet

Economy LED Batten- Mains DALI

CAT. NO. 659320DM, 659322DM, 659324DM



Cat. No.	659320DM	659322DM	659324DM	
Description	L6 LED Batten	L12 LED Batten	L15 LED Batten	
Nominal Input Voltage	230 - 240 V a.c. 50 Hz			
Power Consumption (W)	20	36	50	
Light Source	Selectable LED (3000K / 4000K / 6000K)			
Inrush Current (A)	35		34	
Driver Type	Fixed output / Non-Dimmable			
CRI	>80			
Light Source Life (LSL)	50,000 hours @ L70			
Chromaticity Tolerance	MacAdam Ellipse: 4 SDCM			
Luminaire Output (lm)	3000 K	1800	3700	4800
	4000 K	2100	4300	5500
	6000 K	2000	4000	5200
Luminaire Efficacy at 4000K (lm/W)	105	119	110	
Power Factor	> 0.9			
IK Rating	IK06			
IP Rating	IP20			
Body Construction	Zinc steel (powder coated)			
Diffuser Construction	Opal Polycarbonate			
Product Weight (Kgs)	L6=1.6, L12= 2.9, L15= 3.6			
Compliance	AS/NZS 60598			
Product Marking	  			

Economy LED Batten- Mains DALI


CAT. NO. 659320DM, 659322DM, 659324DM



FEATURES

- Available in 2 foot, 4 foot or 5 foot lengths.
- Tri-colour LEDs (3000K/4000K/6000K) selection.
- Available with integrated ON/OFF microwave sensor option.
- Large terminal block.
- Designed in Australia.
- 5 Year Warranty

DIMENSIONS

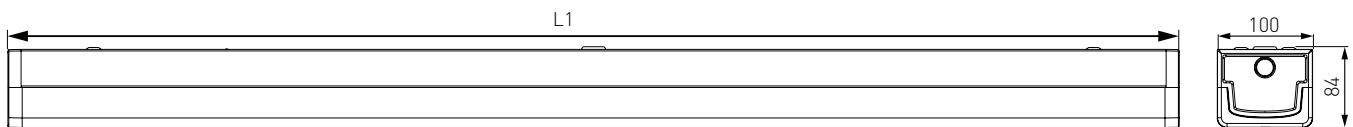

Length	Mains (L1)
L6	630
L12	1230
L15	1530

Note: All dimensions are in mm.

ACCESSORIES

Cat. No.	Description
659402	Eco LED Batten L6 Wire Guard - White
659403	Eco LED Batten L12 Wire Guard - White
659404	Eco LED Batten L15 Wire Guard - White

Legrand - Australia
1300 369 777
www.legrand.com.au
ABN 31 000 102 661

Legrand - New Zealand
0800 476 009
www.legrand.co.nz

Refer to your group buying office, Legrand Sales Representative or Legrand Sales office for pricing.

Please note: specifications are subject to change without prior notice.

