



A brand of **legrand**

serene

CEILING FANS



LIFE IS SIMPLE WHEN IT'S SERENE

Be transported to a place of serenity, where a refreshing breeze and ultimate cooling comfort is top of your mind. Experience life with powerful airflow, whether it's indoors or outdoors in undercover areas, with our sleek, modern fans designed specially for the Australian climate.



LIFE IS
SIMPLE WHEN
IT'S SERENE.



RUST FREE
ABS
PLASTIC

Manufactured from high-strength, durable ABS plastic which is a rust-free, coastal rated material suitable for indoor and undercover outdoor usage.

QUICK-FIT
BLADES

Serene utilises a quick-fit blade feature to reduce ceiling fan assembly and installation time. The lower canopy features a twist and remove function, to allow full access to all blade fixing points at once.

REVERSIBLE
SUMMER/WINTER
MODE

Serene circulates air in reversible summer and winter modes to keep your spaces comfortable year-round.



Summer mode:

Fan operates by rotating anti-clockwise to push cool air down and pull warm air up, creating a wind chill effect of the air moving around you.




Winter mode:

Fan operates in reverse by rotating clockwise to pull cool air up and push warm air down, allowing for warm air to be redistributed in the room.

QUICK-FIT BLADES SYSTEM

Designed to reduce ceiling fan assembly and installation time.

- Lower canopy features a twist and remove function which allows full access to all blade fixing points at once.
- Each fan blade requires only 2 screws.
- Easy access to recover a screw if it's accidentally dropped into the housing.

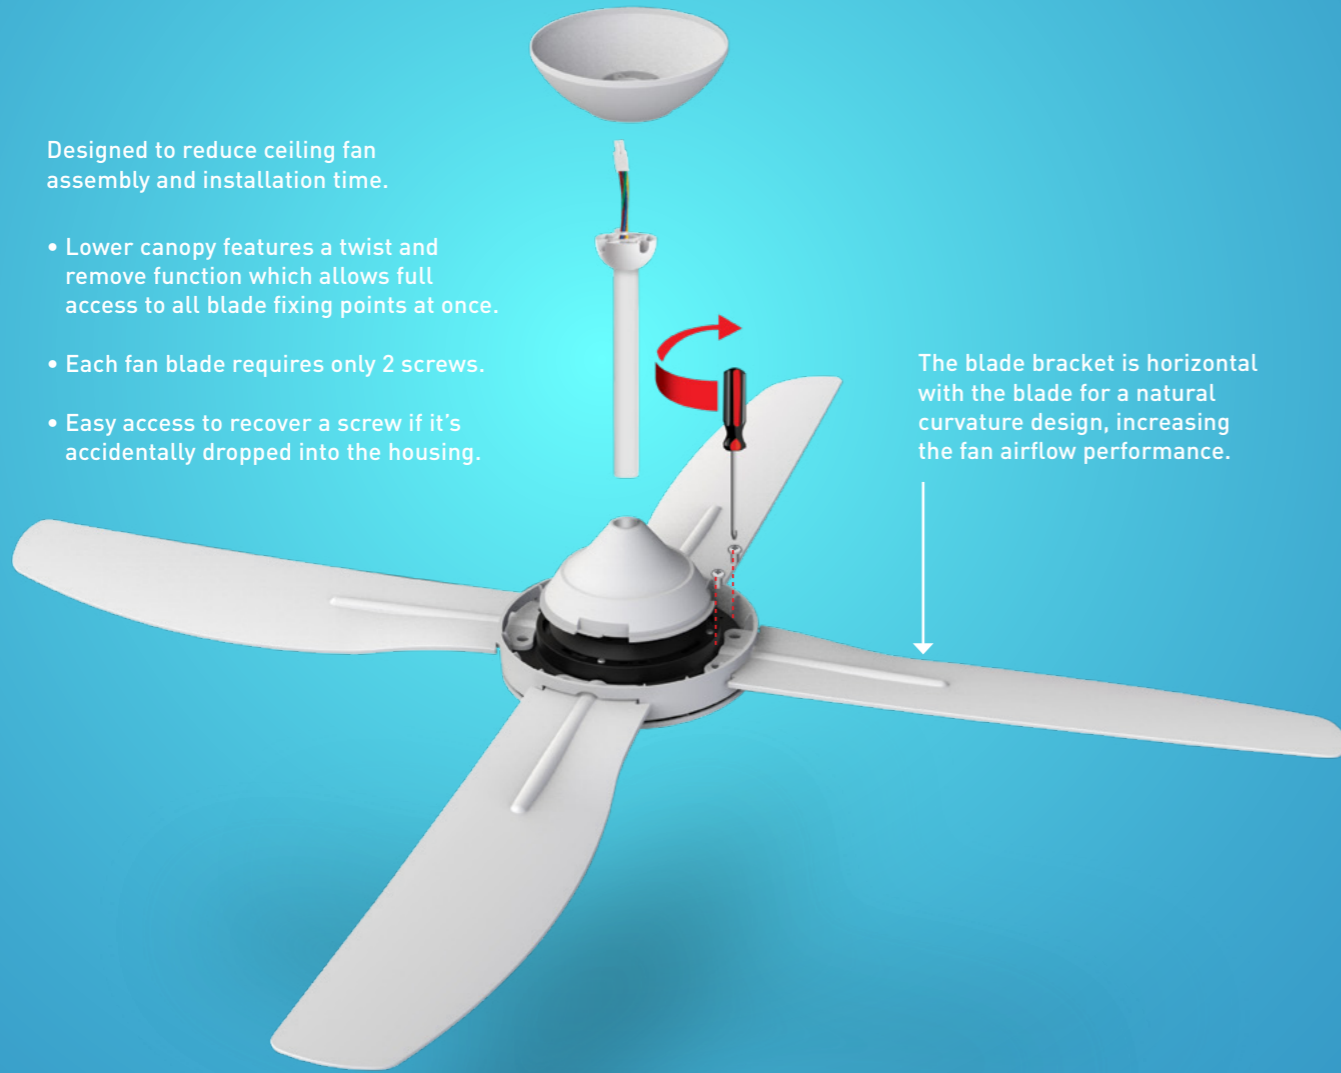


The blade bracket is horizontal with the blade for a natural curvature design, increasing the fan airflow performance.

HOW TO CHOOSE THE RIGHT CEILING FAN SIZE

Room size: **13 m² to 20 m²**
 Recommended fan size in mm: **1320 mm to 1420 mm**
 Recommended fan size in inches: **52" or 56"**

Room size: **Up to 7 m²**
 Recommended fan size in mm: **920 mm to 1220 mm**
 Recommended fan size in inches: **36" or 48"**

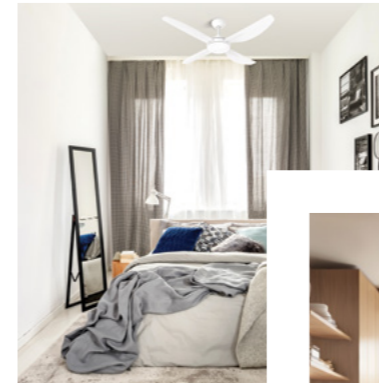

Room size: **7 m² to 13 m²**
 Recommended fan size in mm: **1220 mm to 1320 mm**
 Recommended fan size in inches: **48" or 52"**

SERENE CEILING FANS RANGE

AC	1220 MM, 48" CF12AC4BWE		1320 MM, 52" CF13AC4BWE	
AC WITH LIGHT	1220 MM, 48" CF12AC4BLEWWE		1320 MM, 52" CF13AC4BLEWWE	
DC	1220 MM, 48" CF12DC4BWE		1320 MM, 52" CF13DC4BWE	

REGULATION REQUIREMENT

The Australian and New Zealand standard implies that the lowest point of the fan blades must be installed at least 2.1 m from the floor and the blades at least 300 mm from the nearest wall.





SERENE AC CEILING FANS

Bring style and comfort to front of mind, with Serene AC ceiling fans. A stylish addition to any room, made from rust-free ABS plastic to increase fan durability and leave you feeling comfortable all year round.



1220 MM, 48"
CF12AC4BWE



1320 MM, 52"
CF13AC4BWE

PRODUCT SPECIFICATIONS

Cat. No.	CF12AC4BWE	CF13AC4BWE
Body and Canopy Construction	ABS plastic (rust free [^])	
Blade Material	ABS plastic (rust free [^])	
Colour/Finish	White	
Number of Blades	4	
Blade Size	1220 mm, 48"	1320mm, 52"
Blade Pitch	11.5°	10.5°
Maximum Airflow	9480 m ³ /h	10500 m ³ /h
Maximum Airflow Per Wattage	135 m ³ /h/W	140 m ³ /h/W
Maximum RPM	230 RPM	
Maximum Power	70 W	75 W
Motor Type	AC (Alternate Current)	
Supply Voltage	230-240 V ~ 50 Hz	
Ceiling Install	Hang sure canopy mounting (slope up to 18°)	
Recommended Height	There should be at least 2.1 m between the lowest point of the ceiling fan blades and the floor.	
Wall Control	Legrand Excel Life rotary 3-speed fan controller (ED3FCSEWE)	
Remote Control	HPM 3-speed fan controller (CFSEACREMOTE - sold separately)	
Includes	Motor assembly, 4 x ABS plastic blades, screw pack, fan wall control, mounting bracket, instruction manual	

Cat. No.	CF12AC4BWE			CF13AC4BWE		
Fan Speed	Low	Medium	High	Low	Medium	High
RPM*	110	165	230	105	150	230
Power (Watts)	20	35	70	19	36	75
Airflow (m ³ /h)	4500	7200	9480	5100	7800	10500

*RPM: Rotations Per Minute
[^]Rust free only applies to body, canopy and blades and does not apply to the metal downrod

ACCESSORIES



Wall Control (Included)
ED3FCSEWE





Remote Control (Optional)
Serene AC Ceiling Fan Remote Control Kit White
CFSEACREMOTE



Extension Downrods (Optional)
Serene Ceiling Fan Extension Downrod 750 mm x 21.5 mm White
CFSEDR750WE
Serene Ceiling Fan Extension Downrod 1500 mm x 21.5 mm White
CFSEDR1500WE

SHIPPING

Cat. No.	CF12AC4BWE	CF13AC4BWE
Product Dimensions	1220 mm x 337 mm	1320 mm x 335 mm
Product Weight	5.2 kg	6.2 kg
Packaging Dimensions (L x W x H)	595 mm x 330 mm x 317 mm	595 mm x 330 mm x 317 mm
Packaging Gross Weight	7.2 kg	8.2kg

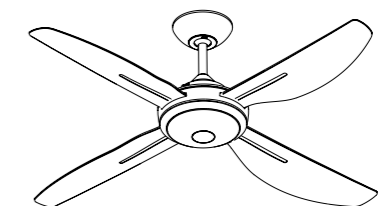

SERENE AC CEILING FANS WITH LED LIGHT



Illuminate your space with the Serene AC ceiling fan with tri-colour dimmable LED light. Featuring an integrated LED light, with a long-lasting lifespan, to provide even light distribution for years to come. The colour temperature selector allows for a switch between; warm white, cool white and natural white lighting.



1220 MM, 48"
CF12AC4BLEDWE



1320 MM, 52"
CF13AC4BLEDWE


PRODUCT SPECIFICATIONS

Cat. No.	CF12AC4BLEDWE	CF13AC4BLEDWE
Body and Canopy Construction	ABS plastic (rust free [^])	
Blade Material	ABS plastic (rust free [^])	
Colour/Finish	White	
Number of Blades	4	
Blade Size	1220 mm, 48"	1320mm, 52"
Blade Pitch	11.5°	10.5°
Maximum Airflow	9480 m ³ /h	10500 m ³ /h
Maximum Airflow Per Wattage	135 m ³ /h/w	140 m ³ /h/W
Maximum RPM	230 RPM	
Maximum Power	70 W	75 W
Motor Type	AC (Alternate Current)	
Supply Voltage	230-240 V ~ 50 Hz	
Ceiling Install	Hang sure canopy mounting (slope up to 18°)	
Recommended Height	There should be at least 2.1 m between the lowest point of the ceiling fan blades and the floor.	
Wall Control	Legrand Excel Life rotary 3-speed fan controller with light switch on 2 gang plate (ED3FCSERLWE)	
Remote Control	HPM 3-speed fan controller (CFSERACREMOTE - sold separately)	
Includes	Motor assembly, 4 x ABS plastic blades, screw pack, fan wall control, light switch, mounting bracket, instruction manual	
LIGHT		
Light Type	Integrated Tri-Colour CCT (Correlated Colour Temperature)	
LED Light Tri-colour Range	1250 lumens 3,000K (Warm White) 1400 lumens 4,000K (Cool White) 1290 lumens 5,700K (Natural White)	
Light Dimming	Dimmable with compatible wall dimmer, not dimmable by remote control	
Light Wattage	16 W	


Cat. No.	CF12AC4BLEDWE			CF13AC4BLEDWE		
Fan Speed	Low	Medium	High	Low	Medium	High
RPM*	110	165	230	105	150	230
Power (Watts)	20	35	70	19	36	75
Airflow (m ³ /h)	4500	7200	9480	5100	7800	10500

*RPM: Rotations Per Minute
[^]Rust free only applies to body, canopy and blades and does not apply to the metal downrod

ACCESSORIES



Wall Control with Light Switch (Included)
ED3FCSERLWE





Remote Control (Optional)
Serene AC Ceiling Fan Remote Control Kit White
CFSEACREMOTE



Extension Downrods (Optional)
Serene Ceiling Fan Extension Downrod 750 mm x 21.5 mm White
CFSEDR750WE
Serene Ceiling Fan Extension Downrod 1500 mm x 21.5 mm White
CFSEDR1500WE

SHIPPING

Cat. No.	CF12AC4BLEDWE	CF13AC4BLEDWE
Product Dimensions	1220 mm x 370 mm	1320 mm x 372 mm
Product Weight	5.6 kg	6.5 kg
Packaging Dimensions (L x W x H)	595 mm x 330 mm x 317 mm	595 mm x 330 mm x 317 mm
Packaging Gross Weight	7.6 kg	8.5 kg

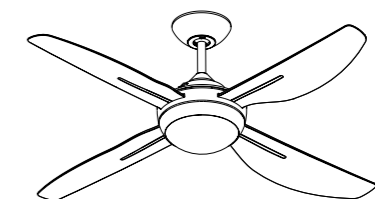



SERENE DC CEILING FANS

Introducing Serene DC ceiling fans, the highest airflow performance and most energy efficient in the range. With its whisper quiet operation and low-power consumption, it's the perfect choice for cool and stylish comfort.

Serene DC includes a remote control which features 6-speed settings and a conveniently located summer/winter mode button, allowing for greater control of your airflow.



1220 MM, 48"
CF12DC4BWE



1320 MM, 52"
CF13DC4BWE

PRODUCT SPECIFICATIONS

Cat. No.	CF12DC4BWE	CF13DC4BWE
Body and Canopy Construction	ABS plastic (rust free [^])	
Blade Material	ABS plastic (rust free [^])	
Colour/Finish	White	
Number of Blades	4	
Blade Size	1220 mm, 48"	1320mm, 52"
Blade Pitch	11.5°	10.5°
Maximum Airflow	11400 m ³ /h	12600 m ³ /h
Maximum Airflow Per Wattage	285 m ³ /h/w	315 m ³ /h/W
Maximum RPM	260 RPM	230 RPM
Maximum Power	40 W	
Motor Type	DC (Direct Current)	
Supply Voltage	230-240 V ~ 50 Hz	
Ceiling Install	Hang sure canopy mounting (slope up to 13°)	
Recommended Height	There should be at least 2.1 m between the lowest point of the ceiling fan blades and the floor.	
Remote Control	6-speed fan controller (included) with 3 timers, forward/reverse mode, natural wind mode and fan ON/OFF + wall mounted holder	
Includes	Motor assembly, 4 x ABS plastic blades, screw pack, fan remote control, 2 x AAA batteries, mounting bracket, instruction manual	

Cat. No.	Fan Speed	RPM*	Power (Watts)	Airflow (m ³ /h)
CF12DC4BWE 1220mm, 48"	1	110	5	4500
	2	137	8	5700
	3	169	12	6900
	4	198	18	8400
	5	230	26	9900
	6	260	40	11400
CF13DC4BWE 1320mm, 52"	1	94	5	5100
	2	117	8	6300
	3	145	12	7800
	4	168	18	9900
	5	196	26	11400
	6	230	40	12600

*RPM: Rotations Per Minute
[^]Rust free only applies to body, canopy and blades and does not apply to the metal downrod

ACCESSORIES





Remote Control (Included)
Serene DC Ceiling Fan Remote Control Kit White



Extension Downrods (Optional)
Serene Ceiling Fan Extension Downrod 750 mm x 21.5 mm White
CFSERDR750WE
Serene Ceiling Fan Extension Downrod 1500 mm x 21.5 mm White
CFSERDR1500WE


SHIPPING

Cat. No.	CF12DC4BWE	CF13DC4BWE
Product Dimensions	1220 mm x 337 mm	1320 mm x 335 mm
Product Weight	6.0 kg	6.4 kg
Packaging Dimensions (L x W x H)	595 mm x 330 mm x 317 mm	595 mm x 330 mm x 317 mm
Packaging Gross Weight	7.2 kg	8.2 kg

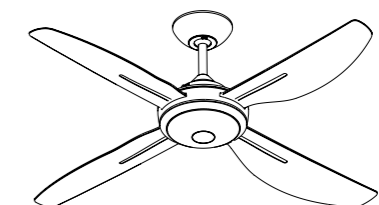



A brand of **legrand**

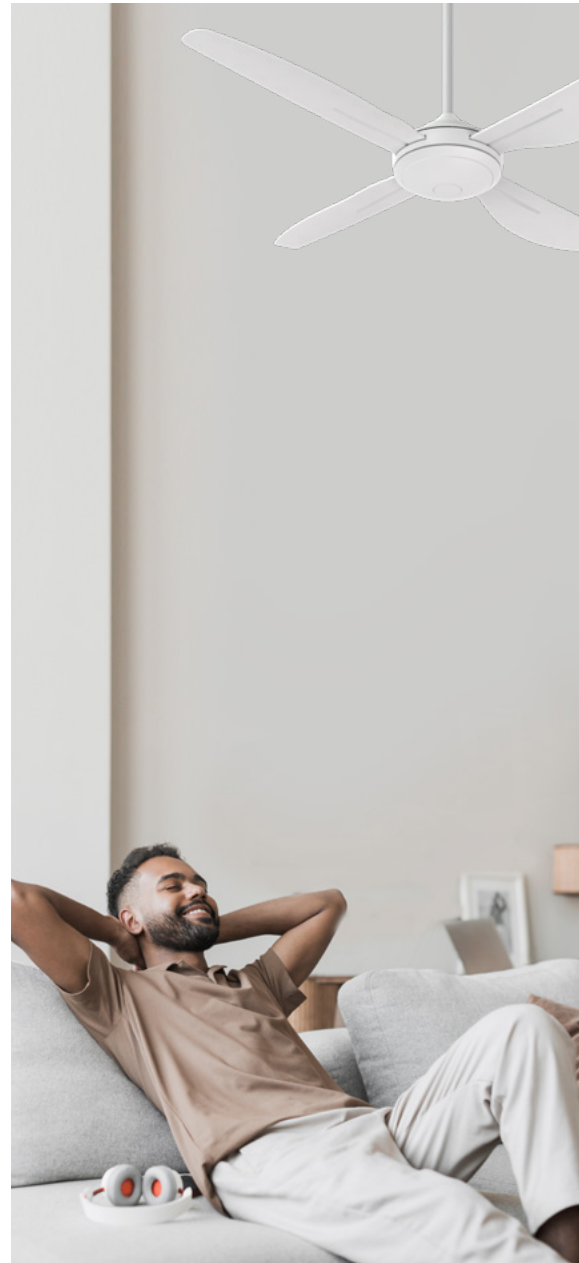

SCAN TO
WATCH VIDEO

Disclaimer: The information provided in this document is intended for informational purposes only. It has been prepared and reviewed with all reasonable care and is believed to be correct at the time of printing. Legrand Australia and New Zealand may also make improvements and/or changes to the products, pricing and/or programs described in this brochure at any time without notice.

Legrand Australia

Building 4 Nexus Industry Park
43-47 Lyn Pde Prestons NSW 2170
1300 369 777

www.hpm.com.au

Legrand New Zealand

106-124 Target Road Glenfield
Auckland 0627 New Zealand
0800 476 009

www.hpm.co.nz

LEG3731

07/2023