

Datasheet

WP3 LED Weatherproof Batten IP65 – Mains with dimmable sensor

CAT. NO. **659302MA**, **659305MA**, **659308MA**



Cat. No.		659302MA	659305MA	659308MA
Description		WP3 L6 LED BATTEN MW DIM MAINS	WP3 L12 LED BATTEN MW DIM MAINS	WP3 L15 LED BATTEN MW DIM MAINS
Supply Voltage		230-240 V a.c. 50 Hz		
Movement sensor type		Microwave		
Light Source		Selectable LED (3000K/4000K/6500K)		
Chromaticity Tolerance		MacAdam Ellipse: 4 SDCM		
Luminous flux (lm) (Mains mode)	Warm	1900	4220	5410
	Cool	1940	4370	5590
	Natural	1960	4390	5610
Power consumption (W)		15	34	43
Luminaire efficacy at 4000K (lm/W)		129	129	130
Power factor		>0.8	>0.9	
Inrush Current		13.6A	35A	
IP Rating		IP65		
IK Rating		IK08		
Retaining clips		304 Stainless Steel		
Body construction		Polycarbonate		
Diffuser		Opal polycarbonate		
Length (mm)		664	1274	1574
Weight (kg)		1.3	2.2	2.8
Compliance		AS/NZS 60598, AS CISPR 15		
Product marking				

WP3 LED Weatherproof Batten IP65 – Mains with dimmable sensor


CAT. NO. **659302MA**, **659305MA**, **659308MA**




FEATURES

- A premium range of LED weatherproof battens.
- Available in 2 foot, 4 foot or 5 foot lengths.
- Tri-colour LED selection.
- Ideal replacement for T5 equivalents.
- LED Light source life:
 - 150,000hrs, L80 B50 at ambient temperature of 25°C.
 - 250,000hrs, L70 B50 at ambient temperature of 25°C.
- CRI > 90
- 5 Year warranty.

DIMENSIONS

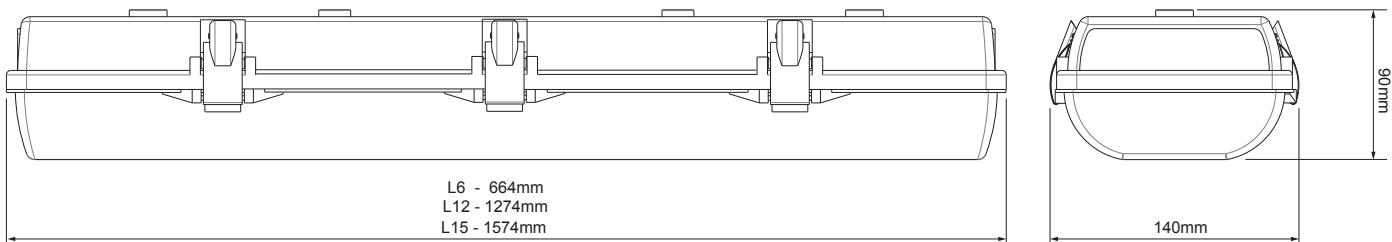

DIMMABLE SENSOR OPERATION

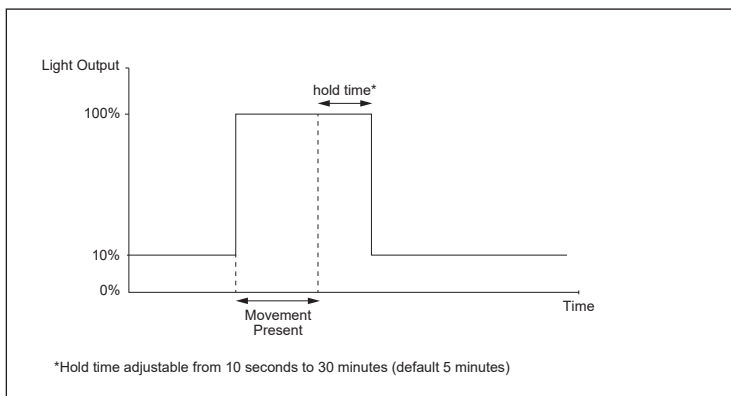

Legrand - Australia
1300 369 777
www.legrand.com.au
ABN 31 000 102 661

Legrand - New Zealand
0800 476 009
www.legrand.co.nz

Refer to your group buying office, Legrand Sales Representative or Legrand Sales Office for pricing.

Please note: specifications are subject to change without prior notice.



LE14859AB

10/2024