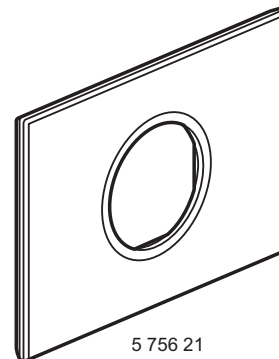
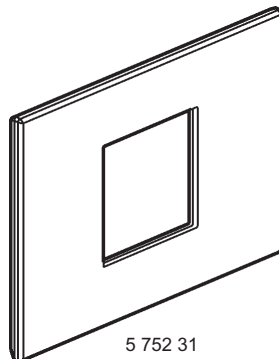
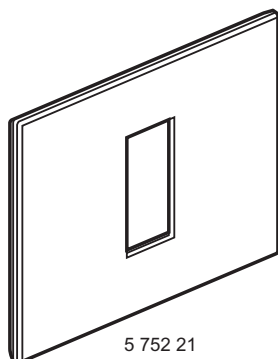


Arteor™
Pearl alu plates for italian standard






Cat. No(s).: 5 750 11 - 5 752 21/31 - 5 755 01 - 5 756 21



1. USE

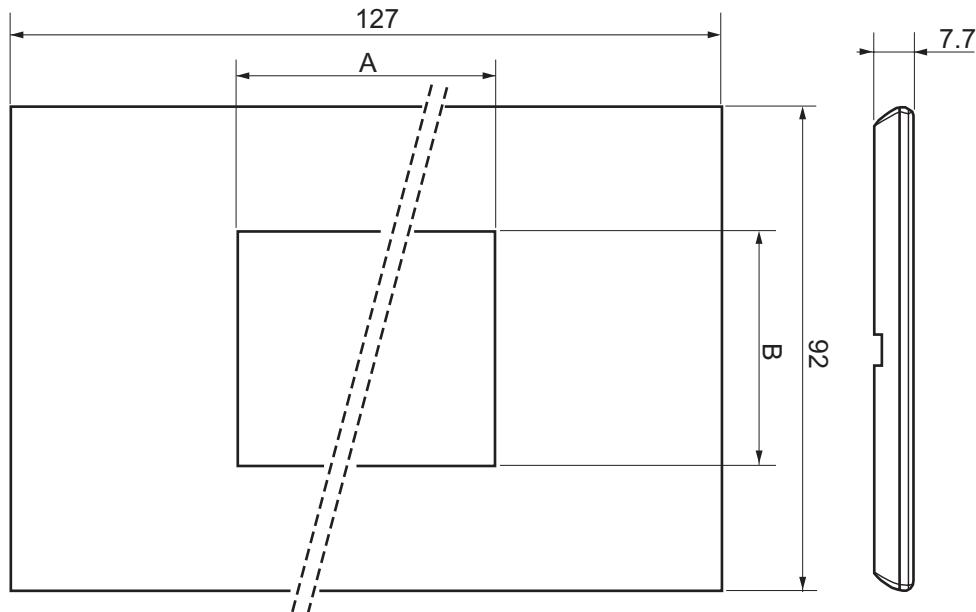
Plates for covering mechanisms.

2. RANGE

	Designation	Cat. No.	Number of modules	Fixing method	Weight (g)
	1 module plate square	5 752 21	1	with clips	42.5
	2 modules plate square	5 752 31	2	with clips	41.5
	2 modules plate round	5 756 21	2	with clips	42.2
	3 modules plate square	5 750 11	3	with clips	38.1
	3 modules plate round	5 755 01	3	with clips	38.2

Pearl alu plates for italian standard

3. OVERALL DIMENSIONS



Cat. No.	A	B
5 752 21	22.5	45.4
5 752 31	45.4	
5 756 21	Ø 45.4	
5 750 11	68	45.4
5 755 01		

4. MOUNTING

The plates clip on in notches onto screw-type or claw-type mounting supports (notches are used for thickness compensation. E.g: wall paper). Easy to remove with a screwdriver.
No flatness defect of more than 1.5 mm in a periphery of 10 cm around the installed flush box.
Protection film must be removed only once site work is fully completed.

5. TECHNICAL CHARACTERISTICS

5.1 Mechanical characteristics

Impact tests: IK 04

5.2 Material characteristics

Front plate: polycarbonate
Under plate: polycarbonate

5.3 Climatic characteristics

Storage temperatures: - 10° C to + 70° C
Operating temperatures: - 5° C to + 50° C

6. CLEANING

Surface cleaning with a cloth.
Do not use: acetone, tar remover, trichloroethylene.

6.1 Resistance to cleaning agents

Hexane (EN 60669-1), methylated spirits, soapy water, glass cleaning substance.

6.2 Resistance to hospital-type cleaning agents

Resistance to the following agents: Anios, Surfanios, Bactylsine, Hydrogen peroxyde (30%).

7. SPECIAL USE

Arteor plates must not be painted.