
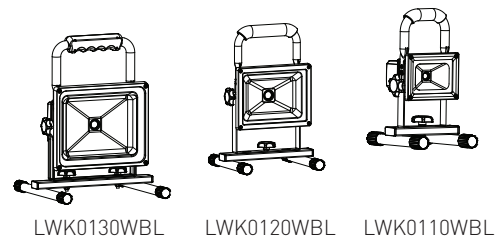


LED Worklights

Instruction Manual

Cat. No: **LWK0110WBL, LWK0120WBL, LWK0130WBL, LWK0220WBL, LWK0240WBL**

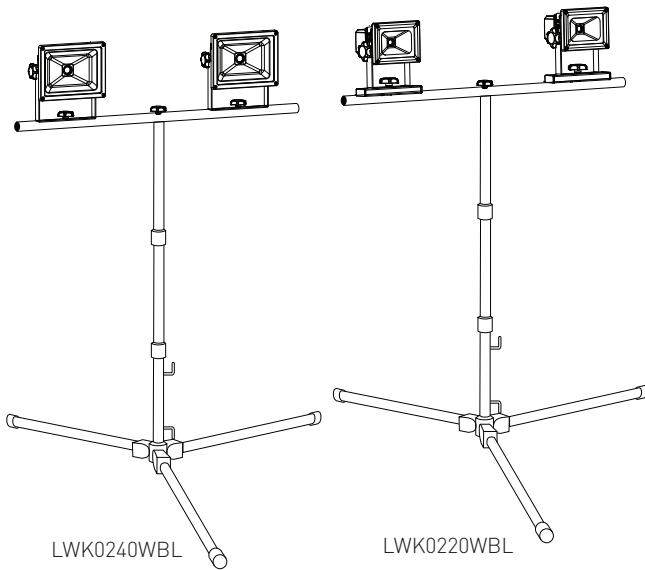

1 Specification


Cat. No.	LWK0110WBL	LWK0120WBL	LWK0130WBL	LWK0220WBL	LWK0240WBL
Nominal Input Voltage	230-240 V a.c 50 Hz				
Input Power	11 W	23 W	32 W	22 W	47 W
Lumens Output	730 lm	2040 lm	2250 lm	2 x 730 lm	2 x 2040 lm
Colour Temperature	Cool White 4000K Nominal				
Protection Class	Class 1				
Lens/Glass	4 mm thick tempered glass				
IP Rating	IP44				
Length of Power cord	1.8 m			3 m	
Weight (excl. packaging)	1.1 kg	1.7 kg	2.5 kg	4.1 kg	5.5 kg
Height Adjustment	N/A			Tripod: Min 0.65 m, Max. 1.25 m	

2 Assembly

For **LWK0110WBL, LWK0120WBL** and **LWK0130WBL** mount the head lamp on the stand and fix in place with mounting bolt. Tighten to secure.

For **LWK0220WBL** and **LWK0240WBL**

1. Release the 3 leg adjustment bolts, set the 3 legs and allow to lock in position as shown in diagram.
2. Mount the cross bar on to the tripod stand and fix in place with mounting bolt. Tighten to secure.
3. Mount the head lamps on the cross bar and fix in place with mounting bolt. Tighten to secure.
4. Set the height of the worklight to desired position and tighten the height adjustment knobs.
5. Tilt and swivel the head lamps to desired position. Tighten moulded knob. When adjusting the head lamps ensure no strain is placed on the supply cord.

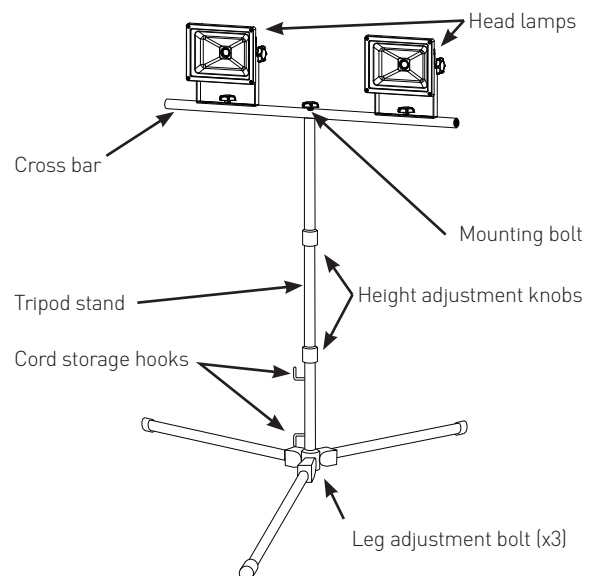


3 Maintenance and Storage

1. The worklight requires very little care and maintenance. Simply clean the lens/glass regularly with a non-abrasive cleaner.
2. Wrap power cord around storage hooks when not in use.

4 Product Notes

1. This product must be installed and used as per these instructions.
2. When the worklight is used outdoors it should not be exposed directly to the elements.
3. Do not operate in close proximity to combustible materials or substances affected by heating or drying. Keep a minimum distance of 0.5m from adjacent objects.



4. This product contains no serviceable parts and no attempt should be made to repair this product. If the product is faulty it should be discarded.
5. This product has been designed to operate in ambient temperatures -10°C to +40°C.
6. Recommended for use only on circuits with Earth Leakage Protection (with RCD).
7. This product is not suitable for use in hazardous environments and/or corrosive areas.
8. An IP rating of IP44 is generally considered suitable for external walls with supplementary protection such as overhanging eaves.
9. The material in this product may vary in colour from batch to batch. Colour matching from one batch to another cannot be guaranteed.
10. Extended exposure to UV rays (such as exposure to direct sunlight) may cause discolouration of this product.
11. This product is not suitable for marine environments such as areas subject to salt spray and/or mist.
12. This product utilises intellectual property in the form of registered designs, trademarks, and/or patents. Such intellectual property remains the property of Legrand in all cases.
13. Legrand reserves the right to modify the specification of this product at any time.

Warranty

Legrand warrants this product for a period of 3 years from the date of purchase. These goods come with guarantees that cannot be excluded under the Australian and New Zealand Consumer Laws. You are entitled to a replacement or a refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

See the Warranty card enclosed with this product for further details.

Customer Service

For all Customer Service and Technical Support please call Monday to Friday during business hours.

Legrand Australia
1300 369 777
www.hpm.com.au

Legrand New Zealand
0800 476 009
www.hpm.co.nz

ABN: 31 000 102 661

