





LED Pendant Lights

Cat. No. LPD013KWE, LPD013KPS, LPD013KBL, LPD023KWE, LPD033KPS


Instruction Manual

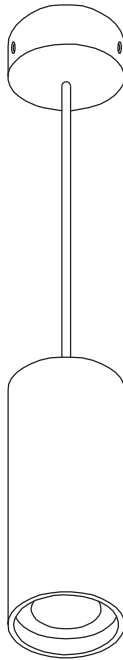

LPD013KWE

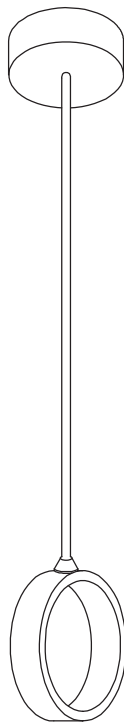

LPD023KWE

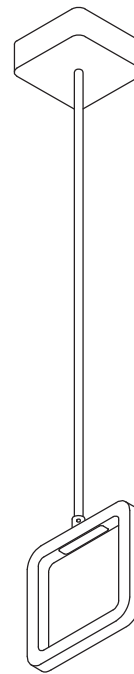

LPD033KPS


This product must be installed by a licensed electrician.

1 Specifications

Cat No.	LPD013KWE	LPD013KPS	LPD013KBL	LPD023KWE	LPD033KPS
Supply voltage	230-240V a.c. 50Hz				
Input power	7W			8W	
Lumens output	560lm			570lm	320lm
Colour temperature (nominal)	3000K				
Colour rendering index (CRI)	80+				
Average beam angle	20°			130°	90°
Dimmable	No				
Average Lifespan (in open air at 25°C)	25,000 hrs			30,000 hrs	
Body colour / finish	White	Silver	Black	White	Silver
Cord / cable length	1.5m				
Weight	732g			920g	

2 Installation

- Remove the mounting bracket from the canopy (Fig. 1) and mount it on to the ceiling (Fig. 2). Ensure the mounting position is close enough to the mains wiring such that it can be covered by the canopy.
- Connect the mains wiring to the Terminal Block as marked. Ensure that the wires are secure and no bare wires are exposed.
- Mount the canopy on to the bracket (Fig. 3).
- For cord length adjustment, loosen the cord grip and push cord into the canopy (Fig. 4).
- DO NOT MEGGER TEST.

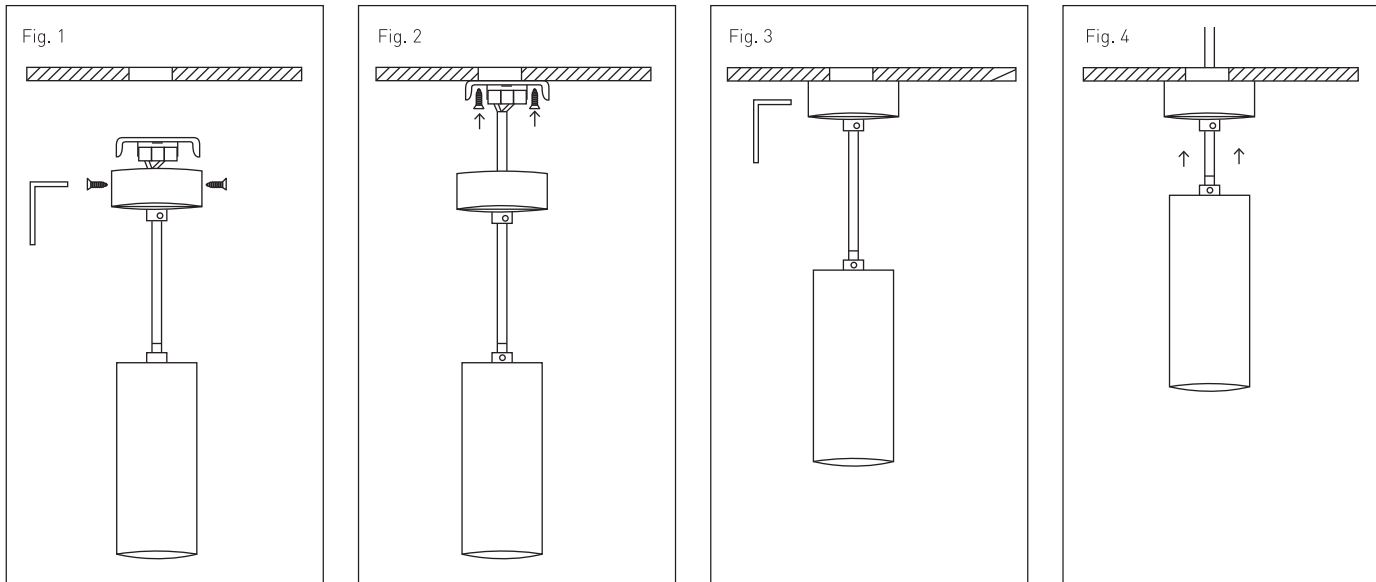

3 Maintenance / Cleaning

This product should only be cleaned with a damp cloth. Cleaning agents and solvents should not be used.

4 Disclaimers

- This product must be installed and used as per these instructions.
- The mounting screws on this product should be tightened to a maximum torque of 0.8Nm. Over tightening may damage the product.
- This product contains no serviceable parts and no attempt should be made to repair it. If the product is faulty it should be discarded.
- This product is not suitable for installation in hazardous and/or corrosive areas.
- Electrical installations periodically receive transient over-voltages. This product has been designed to minimise the effect of such voltages on connected equipment. It may not give full protection for extreme over-voltage transients such as those resulting from a close lighting strike.
- This product utilises intellectual property in the form of registered designs, trademarks, and/or patents. Such intellectual property remains the property of HPM Legrand in all cases.
- HPM Legrand reserves the right to modify the specification of this product at any time.
- This product has been designed to operate in ambient temperatures -10°C to 40°C.
- Stated lifespan is an average. Actual lifespan will vary according to individual circumstances.
- Extended exposure to UV rays (such as exposure to direct sunlight) may cause discolouration of this product.
- The material in this product may vary in colour from batch to batch. Colour matching from one batch to another cannot be guaranteed.

Warranty

HPM Legrand warrants this product for a period of 3 years from the date of purchase.

These goods come with guarantees that cannot be excluded under the Australian and New Zealand Consumer Laws. You are entitled to a replacement or a refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired if the goods fail to be acceptable quality and the failure does not amount to a major failure.

See the Warranty card enclosed with this product for further details.

Customer Service

For all Customer Service and Technical Support please call Monday to Friday during business hours.

HPM Legrand Australia
1300 369 777
www.hpm.com.au

HPM Legrand New Zealand
0800 476 009
www.hpm.co.nz

ABN: 31 000 102 661

A Group brand |  legrand