

# Datasheet

VIVO™

## Double Powerpoint, 10A with Integrated Dual USB Charger



A brand of **legrand**

CAT. NO. **EV777USB2IWE, EV777USB2IGR, EV777USB2IACWE, EV777USB2IACGR**



EV777USB2IWE



EV777USB2IACGR

Cat. No	EV777USB2IWE	EV777USB2IGR	EV777USB2IACWE	EV777USB2IACGR
Colour	White (WE)	Grey (GR)	White (WE)	Grey (GR)
Description	Vivo™ Double Powerpoint with Integrated Dual USB Charger			
Nominal Input Voltage	230-240 V a.c. 50 Hz			
USB Charger	Dual Type A		Type A+C	
Nominal Input Current (charger)	250 mA			
Current Rating (GPO)	10 A			
Stand-by Power Consumption	< 0.07 W			
Nominal Output Voltage	5.2 V d.c.			
Nominal Output Current	2.4 A max. (total)			
Energy Efficiency	> 80% measured at USB socket output side			
Protection Class	Class II			
Overload Protection (USB charger)	2.6 ± 0.2 A			
Surge Protection (USB charger)	180 joules			
Operating Temperature	5°C to 40°C			
Product Dimensions (W x H x D)	119 x 85 x 40 mm			
Safety Standard	EN60950-1, AS/NZS 4665, AS/NZS 3100			

VIVO™

# Double Powerpoint, 10A with Integrated Dual USB Charger



A brand of **legrand**

CAT. NO. EV777USB2IWE, EV777USB2IGR, EV777USB2IACWE, EV777USB2IACGR



Single Product (Qty 1)	
Cat. No.	Barcode
EV777USB2IWE	9321001465294
EV777USB2IGR	9321001465386
EV777USB2IACWE	9321001505068
EV777USB2IACGR	9321001505075


Single Product (Qty 6)	
Cat. No.	Barcode
EV777USB2IWE	9321001466550
EV777USB2IGR	9321001466635
EV777USB2IACWE	9321001505129
EV777USB2IACGR	9321001505136

Outer Box (Qty 72)	
Cat. No.	Barcode
EV777USB2IWE	9321001467809
EV777USB2IGR	9321001467885
EV777USB2IACWE	9321001505181
EV777USB2IACGR	9321001505198


## FEATURES

- 2.4A charging capacity.
- Capable of charging 1 tablet or 2 smartphones simultaneously at their maximum capacity.
- Suitable for telephones, smartphones, MP3/MP4 players, fitness bands and sport watches.
- Suitable for installation in wall boxes.
- Suitable for all commercial and residential installations such as kitchens, bedrooms, offices, retail, hospitality and education facilities.
- Overload protection (USB circuit).
- Low standby power consumption < 0.07W.
- Internal safety shutters for extra safety (powerpoint).
- Conform to AS/NZS60950-1, AS/NZS 4665, AS/NZS 3100.

## Glass and tile cut-out dimensions

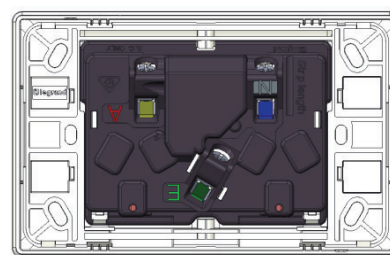

Back view



Side view with wall box

Legrand - Australia  
1300 369 777  
www.hpm.com.au  
ABN 31 000 102 661

Legrand - New Zealand  
0800 476 009  
www.hpm.co.nz

Refer to your group buying office, Legrand Sales Representative or Legrand Sales Office for pricing.

Please note: specifications are subjected to change without prior notice.



HPML1622B

09 / 2021