

Datasheet

Excel Life™ Smart Smart Dimmer - 3 Gang

CAT. NO. EWNDIM3WE, EWNDIM3MW, EWNDIM3MB



EWNDIM3WE



EWNDIM3MW



EWNDIM3MB

Cat. No.	EWNDIM3WE	EWNDIM3MW	EWNDIM3MB
Colour	White (WE)	Matt White (MW)	Matt Black (MB)
Description	Smart Dimmer 3 Gang - 3 Wire		
Nominal Input Voltage	230 - 240 V a.c. 50 Hz		
Min. Load	0 W		
Max. Load	150 W		
No. of Gang	3 Gang		
Wired/Wireless	Wired		
IP Rating	IP2X		
Mounting centres	84 mm		
Product Dimension (W X H X D)	120 x 76 x 42 mm		
Wireless Connectivity	Zigbee 2.4 Ghz to 2.4835 Ghz		
Compliance	AS/NZS 60669.2.1, AS/NZS 4268, ETSI EN 300 328		

Excel Life™ Smart Smart Dimmer - 3 Gang


CAT. NO. **EWNDIM3WE, EWNDIM3MW, EWNDIM3MB**



Features:

- Smart light dimmer to expand an Excel Life™ Smart installation (requires prior installation of Starter kit EWNSKIT series or Gateway Cat. No. 412181).
- 3 ways to control for better user convenience: standard press on the switch, via smart devices or voice control.
- Compatibility with all 3 voice assistants: Apple SIRI, Google Home and Amazon Alexa.
- Energy consumption display to keep track of energy consumption.
- Push notifications to stay informed of home status.
- Same installation as standard 240V a.c switches.
- User-friendly setup via Home+Control App.

Glass and tile cut-out dimensions:

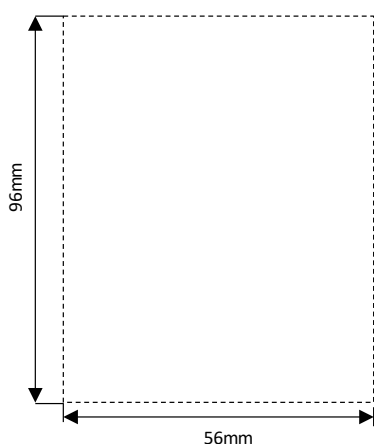

Single product	
Cat. No.	Barcode
EWNDIM3WE	9321001499701
EWNDIM3MW	9321001499541
EWNDIM3MB	9321001499626

Inner box (QTY 5)	
Cat. No.	Barcode
EWNDIM3WE	9321001500216
EWNDIM3MW	9321001500056
EWNDIM3MB	9321001500131

Outer box (QTY 60)	
Cat. No.	Barcode
EWNDIM3WE	9321001500636
EWNDIM3MW	9321001500476
EWNDIM3MB	9321001500551

Legrand Australia
1300 369 777
www.legrand.com.au
ABN 31 000 102 661

Legrand New Zealand
0800 476 009
www.legrand.co.nz

Refer to your group buying office, Legrand Sales Representative or Legrand Sales Office for pricing.

Please note: specifications are subject to change without prior notice.



LE12858AA

03_2021