

WP2 LED Weatherproof Batten IP65  
 – with on/off sensor

CAT. NO. 659072LI, 659073LI



659072LI



659073LI

Cat. No.	659072LI		659073LI	
Description	WP2L6 LED BATTEN 4K MW ON/OFF GALAXY		WP2L12 LED BATTEN 4K MW ON/OFF GALAXY	
Operation Mode	Switched Maintained			
Classification C0/C90	C0: D80, C90: C80		C0: D125, C90: C125	
Battery	Li-ion 12.8V, 1.5 Ah		Li-ion 12.8V, 3.2 Ah	
Length (mm)	671		1273	
Weight (kg)	2.7		4.8	
Light source	LED (4000K)			
Luminous flux (lm)	Mains mode	2200	3900	
	Emergency mode	480	840	
Luminaire efficacy (lm/W)	71		81	
Sensor type	Microwave			
Power(W)	Mains only	28	42	
	Emergency pack	3	6	
	Total	31	48	
Power factor	0.87		0.89	
Inrush current	16.5A		28.5A	
Supply voltage	230 - 240V a.c. 50Hz			
Ballast type	Fixed output / Non-Dimmable			
IP rating	IP65			
IK rating	IK09			
Retaining clips	316 Stainless Steel			
Body construction	Moulded glass reinforced polyester (GRP)			
Diffuser	Clear reeded polycarbonate			
Gasket	Silicone			
Geartray	High reflective white powder coated mild steel			
Compliance	AS/NZS 2293, AS/NZS 60598, AS CISPR 15			
Product marking				

# WP2 LED Weatherproof Batten IP65 – with on/off sensor


CAT. NO. 659072LI, 659073LI




## FEATURES

- Embedded Bluetooth for smart device connectivity.
- Low Power Wide Area Network type of communications utilising the LoRa platform.
- LoRa communication to maximise reliability, coverage and infiltration.
- iSmart™ temperature sensing technology for the LIION battery.
- Electronics designed to lengthen the life of the battery, minimising maintenance costs.
- Environmentally friendly battery.
- A premium range of LED weatherproof battens.
- Available in 2 foot or 4 foot lengths.
- Two lumen packages: 2200lm or 3900lm, 4000K colour temperature.
- LED Light source life:
  - 50,000hrs, L80 B50 at ambient temperature of 25°C.
  - 50,000hrs, L70 B50 at ambient temperature of 40°C.
- CRI > 80
- Integral microwave on/off sensor.
- Dedicated LED engine for maximum spacings.
- Wireless maintained emergency.
- 5 Year warranty.
- Designed and Manufactured in Australia.

## DIMENSIONS

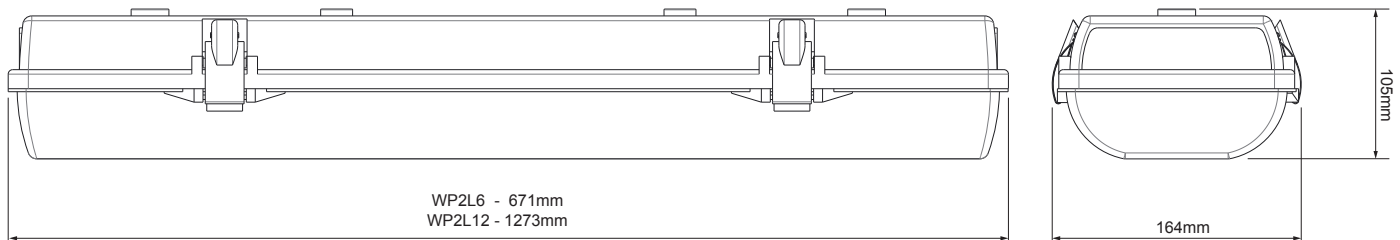

## On /Off sensor operation

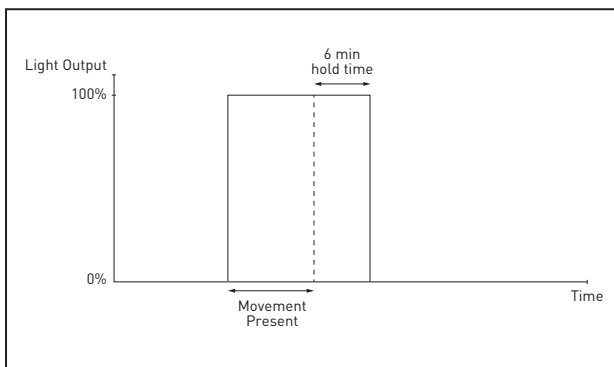

Legrand - Australia  
1300 369 777  
www.legrand.com.au  
ABN 31 000 102 661

Legrand - New Zealand  
0800 476 009  
www.legrand.co.nz

Refer to your group buying office, Legrand Sales Representative or Legrand Sales Office for pricing.

Please note: specifications are subject to change without prior notice.



LEG2097D

03/2022