


# Datasheet

## Tri-Colour LED Downlight - FLUSH FACE

CAT. NO. LDL90TRIWE, LDL90TRIPS





A brand of **legrand**



LDL90TRIWE



LDL90TRIPS


Cat. No.	LDL90TRIWE	LDL90TRIPS
Fascia Colour	White	Polished silver
Nominal Supply Voltage	230 - 240 V a.c. 50Hz	
Input Power	7 W	
Power Factor	0.95	
Colour Rendering Index (CRI)	80+	
Beam Angle	105°	
Ambient test Temperature	ta: 25°C	
Dimmable	Yes (with trailing edge dimmer only)	
Ceiling Cut out size	Ø90mm	
Fascia Size	Ø113mm	
Depth into Ceiling	61mm	
IP Rating	IP44 (Front face when installed as per instructions)	
Product Marking	 	

# Tri-Colour LED Downlight - FLUSH FACE

CAT. NO. LDL90TRIWE, LDL90TRIPS



A brand of **legrand**

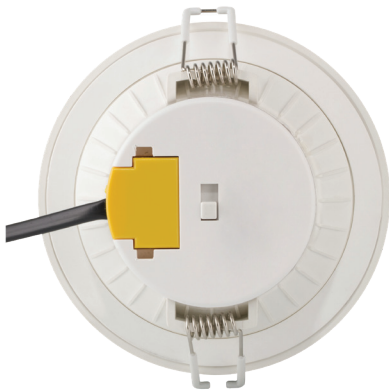

Single Product	
Cat. No.	Single Barcode
LDL90TRIWE	9321001497288
LDL90TRIPS	9321001497301

Outer Box (24)	
Cat. No.	Single Barcode
LDL90TRIWE	9321001497295
Outer Box (20)	
LDL90TRIPS	9321001497318

## FEATURES

- Light Colour Selector lets you easily switch between Warm (3,000K), Cool (4,000K) and Natural (5,000K) light temperature.
- Integrated dimmable driver compatible with trailing edge dimmers.
- Suitable for outdoor undercover areas (IP44 rating).
- Screw-less terminal cover for easy, hard-wired connection.
- High quality flame retardant plastic construction.
- IC-F and IC-4 insulation rating. This downlight can be fully covered and abutted by insulation material.
- Up to 35,000hrs lifespan.
- 2,500V electrical surge protection.
- Flush Fascia that easily integrates with ceiling.

## LIGHT COLOUR VS LUMENS OUTPUT

Colour Temperature	LDL90TRIWE & LDL90TRIPS	
	Lumens Output	Efficacy
3000K Nominal	750lm	105lm/W
4000K Nominal	850lm	120lm/W
5000K Nominal	850lm	120lm/W

Legrand - Australia  
1300 369 777  
www.hpm.com.au  
ABN 31 000 102 661

Legrand - New Zealand  
0800 476 009  
www.hpm.co.nz

Refer to your group buying office, Legrand Sales Representative or Legrand Sales Office for pricing.

Please note: specifications are subject to change without prior notice.

