

Datasheet WP2 LED Weatherproof Batten IP65 - Mains with on/off sensor

CAT. NO. 685041, 685071



685041

The second se			Re Contraction
5	11.11.11.11.11.11.11.11.11.11.11.11.11.	Z 144	
. The state of the			Constant of the

685071

Cat. No.	685041	685071	
Description	WP2L6 LED BATTEN 4K MW ON/OFF	WP2L12 LED BATTEN 4K MW ON/OFF	
Length (mm)	671	1273	
Weight (kg)	2.7	4.8	
Light source	LED (4000K)		
Luminaire luminous flux (lm)	2200	3900	
Circuit power (W)	28	42	
Luminaire efficacy (lm/W)	79	93	
Sensor type	Microwave		
Power factor	0.96	0.93	
Inrush current	16.5A	28.5A	
Supply voltage	230 - 240V a.c 50Hz		
Ballast type	Fixed output/Non-Dimmable		
IP rating	IP65		
IK rating	IK09		
Retaining clips	316 Stainless Steel		
Body construction	Moulded glass reinforced polyester (GRP)		
Diffuser	Clear reeded polycarbonate		
Gasket	Silicone		
Geartray	High reflective white po	wder coated mild steel	
Compliance	AS/NZS 60598		
Product Marking	۷	<u>&</u>	

WP2 LED Weatherproof Batten IP65 - Mains with on/off sensor




CAT NO. 685041, 685071


FEATURES

- A premium range of LED weatherproof battens.
- Available in 2 foot or 4 foot lengths.
- Two lumen packages: 2200lm or 3900lm, 4000K colour temperature.
- Integral microwave on/off sensor.
- Ideal replacement for T5 equivalents.
- Dedicated LED engine for maximum spacings.
- LED Light source life: 50,000hrs, L80 B50 at ambient temperature of 25°C.
 - 50,000hrs, L70 B50 at ambient temperature of 40°C.
- CRI > 80
- 5 Year warranty.
- Designed and Manufactured in Australia.

DIMENSIONS

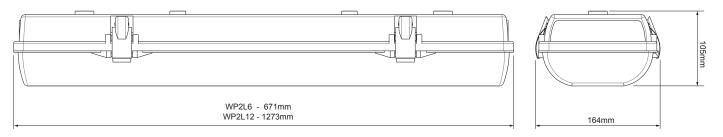

On/Off Sensor Operation

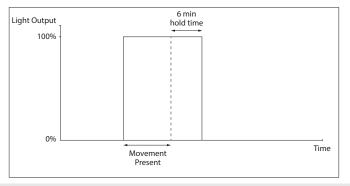

Legrand - Australia 1300 369 777 www.legrand.com.au ABN 31 000 102 661

Legrand - New Zealand 0800 476 009 www.legrand.co.nz Refer to your group buying office, Legrand Sales Representative or Legrand Sales Office for pricing.

Please note: specifications are subject to change without prior notice.