Datasheet

Economy LED Oyster - Emergency Standalone



CAT. NO. **659310SA**, **659311SA**



Cat. No.		659310SA	659311SA
Description		LED Oyster Standalone	LED Oyster Standalone with ON/OFF microwave sensor
Nominal Input Voltage		230 - 240 V a.c. 50 Hz	
Operation Mode		Switched Maintained	
Classification C ₀ /C ₉₀		Ceiling Mount: D63 / D63 Wall Mount: D12.5 / D12.5	
Power Consumption	Mains Only	15 W	
	Emergency Pack	3 W	
	Total	18 W	
Light Source		Selectable LED (3000K / 4000K / 5000K)	
Inrush Current		7.4 A	6.4 A
Driver Type		Fixed output / Non-Dimmable	
Sensor Type		N/A	Microwave
CRI		> 80	
Light Source Life (LSL)		50,000 hours @ L70	
Luminaire Output	Mains Mode	3000K – 1,250 lm 4000K – 1,400 lm 5000K – 1,450 lm	
	Emergency Mode	3000K – 1,250 lm 4000K – 1,400 lm 5000K – 1,450 lm	
Luminaire Efficacy		95 lm/W (4000K)	
Power Factor		> 0.9	
IK Rating		IK06	
IP Rating		IP44	
Body Construction		Polycarbonate	
Diffuser Construction		Opal Polycarbonate	
Product Weight		1.6 kgs	
Compliance		AS/NZS 60598, AS/NZS 2293	
Product Marking			

Economy LED Oyster - Emergency Standalone


CAT. NO. **659310SA, 659311SA**




FEATURES

- Twist lock cover for ease of installation.
- Large terminal block.
- Hinged gear tray for ease of maintenance.
- Tri-colour LEDs (3000K/4000K/5000K) selection.
- Available with integrated On/Off Microwave sensor option.
- 5 Year Warranty


ON/OFF SENSOR FUNCTION

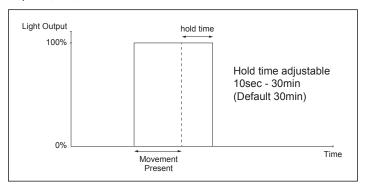

DIMENSIONS



DETECTION RANGE

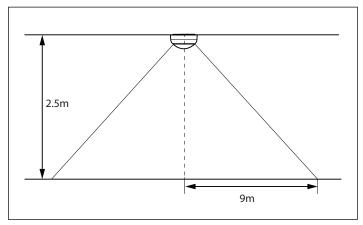

Note: All dimensions are in mm.

Legrand - Australia 1300 369 777 www.legrand.com.au ABN 31 000 102 661

Legrand - New Zealand 0800 476 009 www.legrand.co.nz Refer to your group buying office, Legrand Sales Representative or Legrand Sales office for pricing.

Paper Dr. Group of the Paper