Datasheet

WP3 LED Weatherproof Batten IP65 – Axiom with dimmable sensor



CAT. NO. **659302AX**, **659305AX**, **659308AX**



Cat. No.		659302AX	659305AX	659308AX
Description		WP3 L6 LED BATTEN MW DIM AXIOM	WP3 L12 LED BATTEN MW DIM AXIOM	WP3 L15 LED BATTEN MW DIM AXIOM
Supply Voltage		230-240 V a.c. 50 Hz		
Operation Mode		Switched Maintained		
Movement sensor type		Microwave		
Classification C ₀ /C ₉₀		C ₀ /D80, C ₉₀ /D50	C ₀ /D125, C ₉₀ /D80	C ₀ /D160, C ₉₀ /D100
Battery		Li-ion 12.8 V 1.5 Ah		
Light Source		Selectable LED (3000K/4000K/6500K)		
Chromaticity Tolerance		MacAdam Ellipse: 4 SDCM		
Luminous flux (lm) (Mains mode)	Warm	1900	4220	5410
	Cool	1940	4370	5590
	Natural	1960	4390	5610
Power consumption (W)	Mains only	15	34	43
	Emergency pack	3	3	3
	Total	18	37	46
Luminaire Efficacy at 4000K (lm/W)		108	118	122
Power Factor		>0.8	>0.9	
Inrush Current		13.6A	35A	
IP Rating		IP65		
IK Rating		IK08		
Retaining Clips		304 Stainless Steel		
Body Construction		Polycarbonate		
Diffuser		Opal polycarbonate		
Length (mm)		664	1274	1574
Weight (kg)		1.8	2.7	3.3
Compliance		AS/NZS 2293, AS/NZS 60598, AS CISPR 15		
Product Marking		R-NZ		

WP3 LED Weatherproof Batten IP65

- Axiom with dimmable sensor


CAT. NO. 659302AX, 659305AX, 659308AX




FEATURES

- A premium range of LED weatherproof battens.
- Available in 2 foot, 4 foot or 5 foot lengths.
- Tri-colour LED selection.
- Ideal replacement for T5 equivalents.
- LED Light source life: 150,000hrs, L80 B50 at ambient temperature of 25°C.
 - 250,000hrs, L70 B50 at ambient temperature of 25°C.
- CRI > 90
- iSmart[™] temperature sensing technology for the LIION battery.
- Electronics designed to lengthen the life of the battery.
- Environmentally friendly battery.
- 5 Year warranty.
- Designed and Manufactured in Australia.

DIMENSIONS

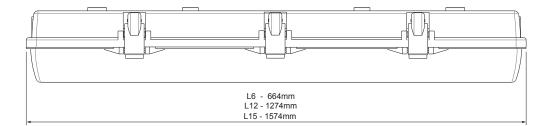



ON / OFF SENSOR OPERATION

